



US012118365B2

(12) **United States Patent**
Bohdan et al.

(10) **Patent No.:** **US 12,118,365 B2**
(45) **Date of Patent:** ***Oct. 15, 2024**

(54) **SYSTEM AND METHOD FOR DEVICE
INTEROPERABILITY AND
SYNCHRONIZATION**

(58) **Field of Classification Search**
CPC G06F 9/4406; G06F 9/4416
See application file for complete search history.

(71) Applicant: **SIMPLEWAY TECHNOLOGIES
LTD., Dublin (IE)**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(72) Inventors: **Artem Bohdan**, Berlin (DE); **Ievgen
Krutov**, Kryvyi Rih (UA)

6,532,538 B1 3/2003 Cronk
8,954,805 B2 2/2015 Liu

(Continued)

(73) Assignee: **SIMPLEWAY TECHNOLOGIES
LTD., Dublin (IE)**

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this
 patent is extended or adjusted under 35
 U.S.C. 154(b) by 0 days.

EP 1808763 A1 7/2007
EP 2753047 A1 7/2014

(Continued)

This patent is subject to a terminal dis-
claimer.

OTHER PUBLICATIONS

(21) Appl. No.: **18/132,828**

US 9,516,090 B2, 12/2016, Koo (withdrawn)
(Continued)

(22) Filed: **Apr. 10, 2023**

Primary Examiner — Stefan Stoynov

(65) **Prior Publication Data**

(74) *Attorney, Agent, or Firm* — Ice Miller LLP; Justin
D. Swindells

US 2024/0078117 A1 Mar. 7, 2024

Related U.S. Application Data

(63) Continuation of application No. 17/318,113, filed on
May 12, 2021, now Pat. No. 11,650,828, which is a
(Continued)


(51) **Int. Cl.**
G06F 9/44 (2018.01)
G06F 9/4401 (2018.01)
(Continued)

(52) **U.S. Cl.**
CPC **G06F 9/4406** (2013.01); **G06F 9/4403**
(2013.01); **G06F 9/4411** (2013.01);
(Continued)

(57) **ABSTRACT**

A device interoperability system for one or more user
devices associated with a user, wherein said one or more
user devices comprises a first user device, said device
interoperability system comprising a communications mod-
ule, wherein a first connection is established between said
first user device and said communications module; storage
associated with said device interoperability system and
coupled to said communications module, wherein said stor-
age stores an operating system, one or more programs, and
data associated with the user, further wherein said operating
system is booted by said first user device via said first
connection; and one or more processors to support said
device interoperability system.

20 Claims, 22 Drawing Sheets

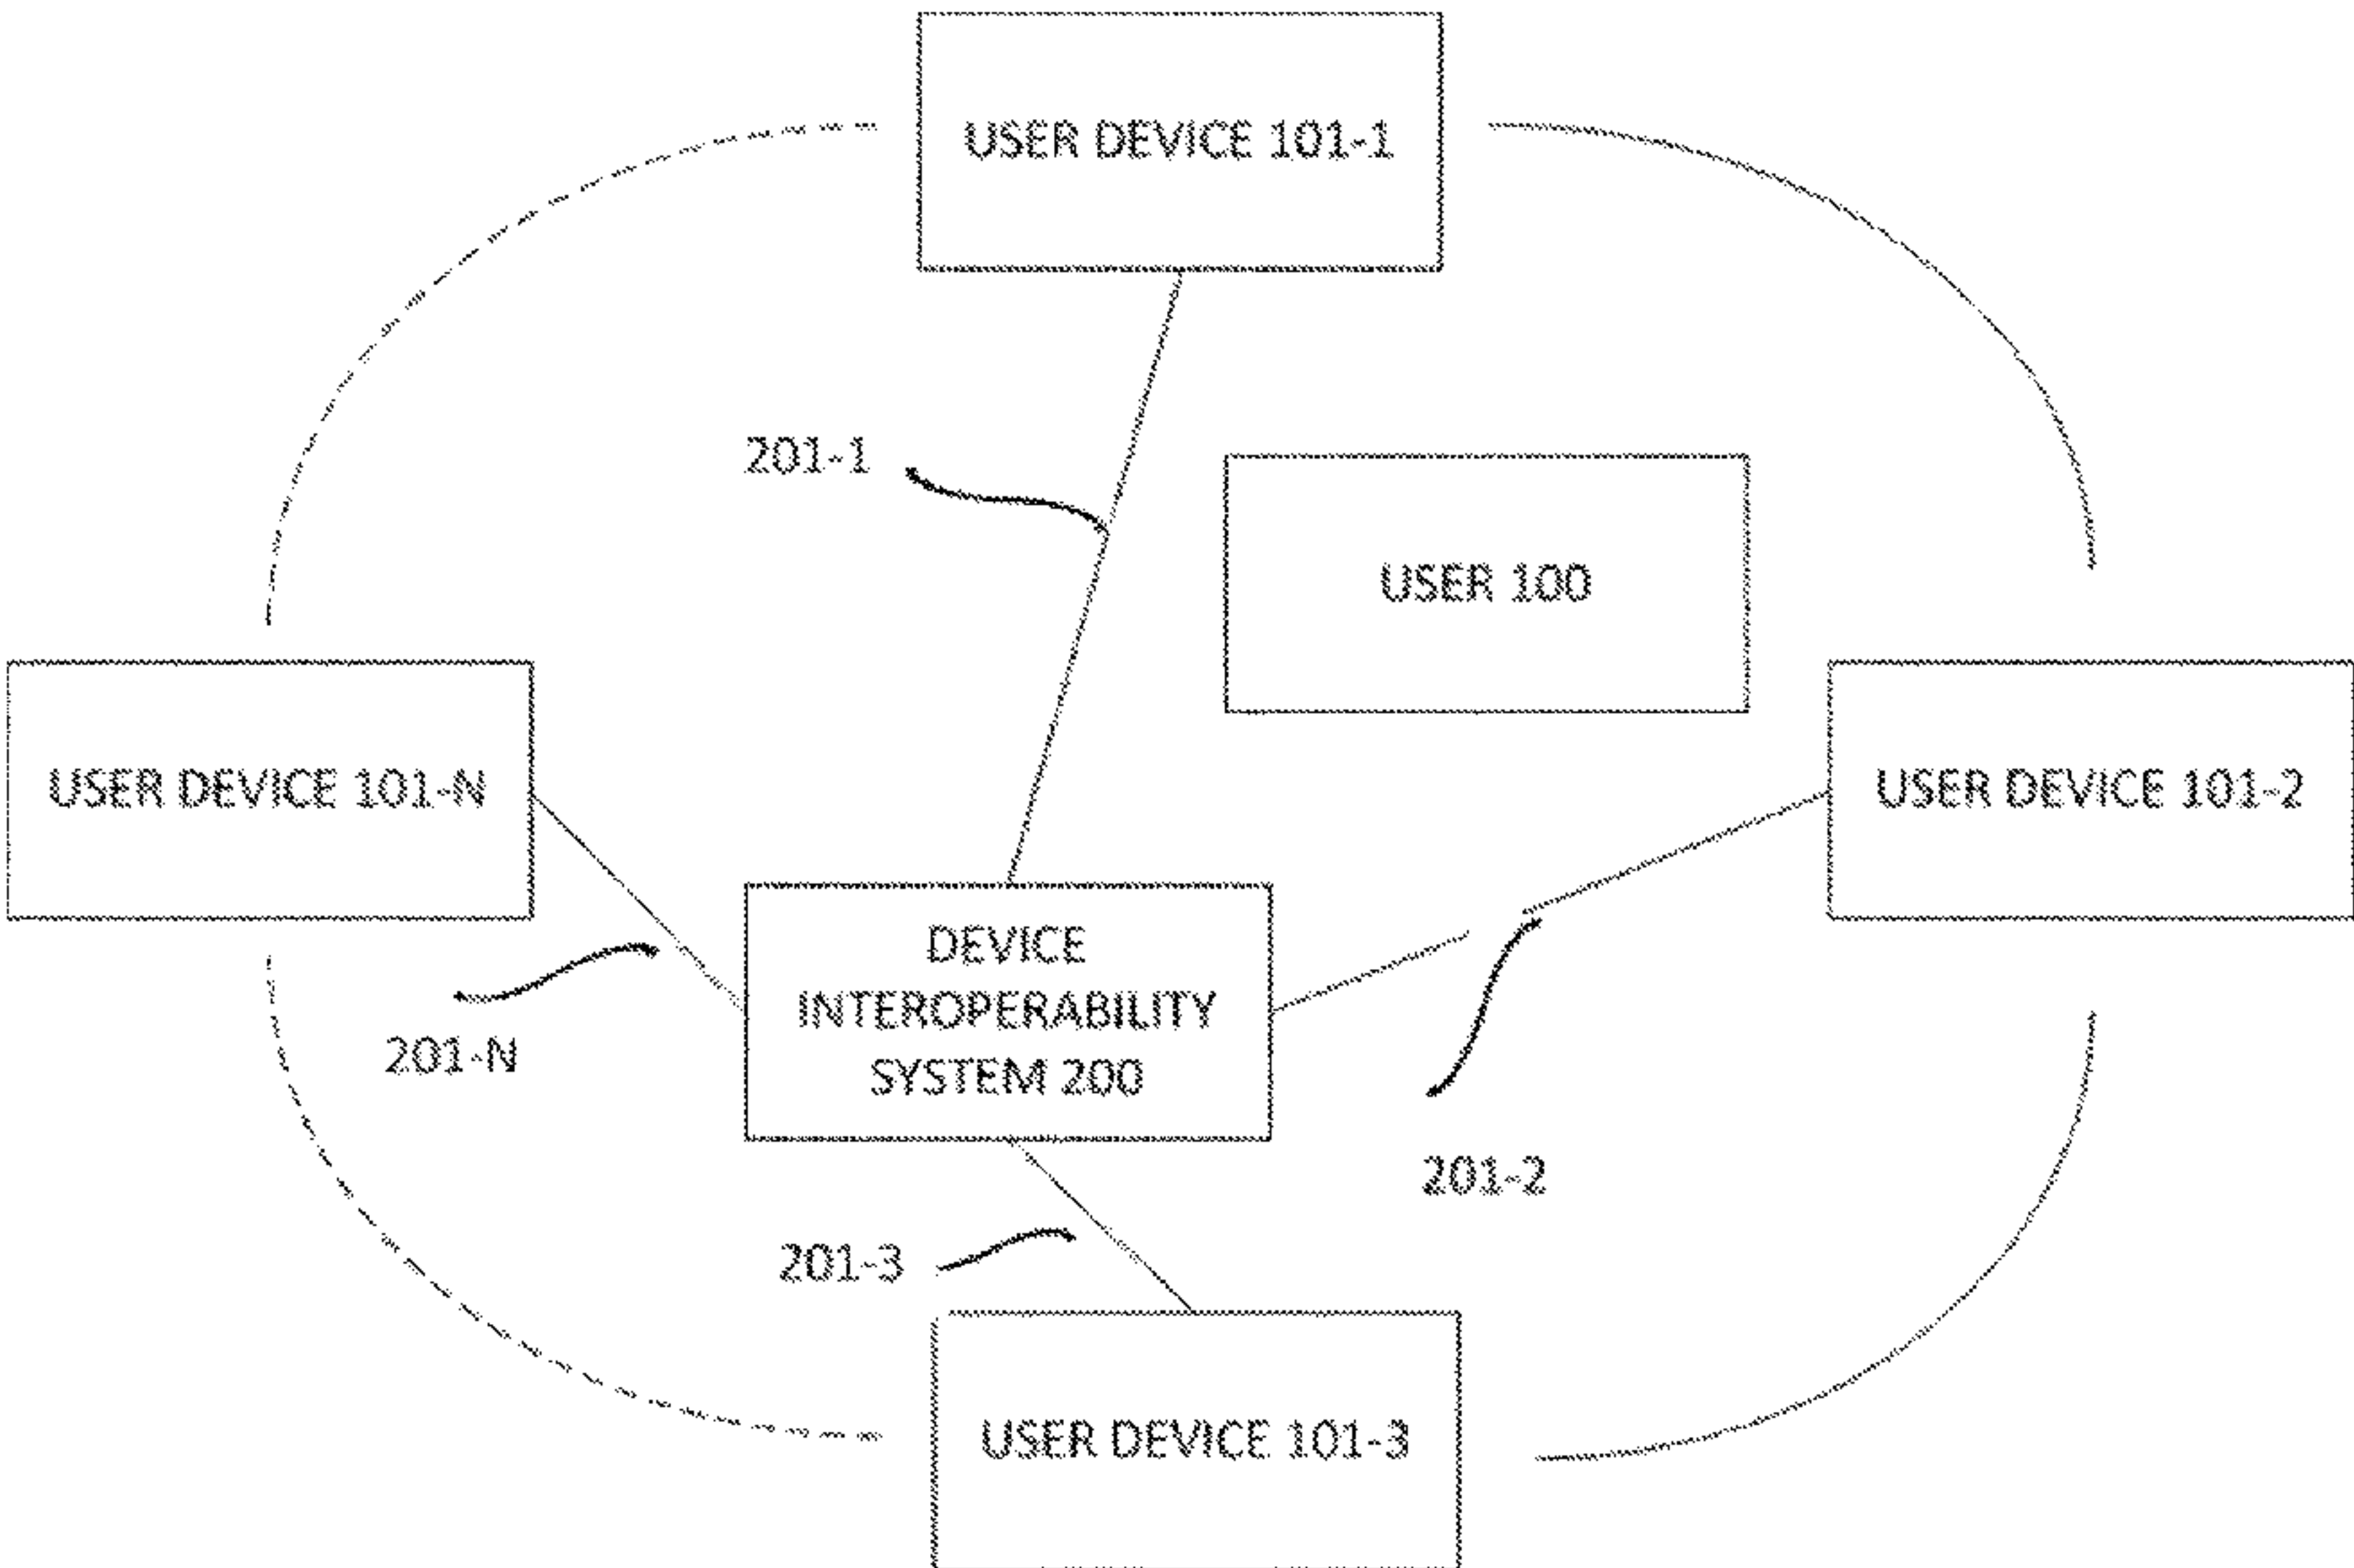

Related U.S. Application Data

continuation of application No. 16/395,478, filed on Apr. 26, 2019, now Pat. No. 11,048,520, which is a continuation-in-part of application No. PCT/IB2017/056516, filed on Oct. 19, 2017.

- (60) Provisional application No. 62/413,169, filed on Oct. 26, 2016.
- (51) **Int. Cl.**
G06F 9/455 (2018.01)
G06F 9/54 (2006.01)
H04L 69/24 (2022.01)
- (52) **U.S. Cl.**
 CPC **G06F 9/4416** (2013.01); **G06F 9/455** (2013.01); **G06F 9/54** (2013.01); **H04L 69/24** (2013.01)

(56) References Cited**U.S. PATENT DOCUMENTS**

9,282,168	B2	3/2016	Prahlad
9,450,874	B2	9/2016	Zhang
9,501,666	B2	11/2016	Lockett
10,180,846	B2	1/2019	Bohdan
2006/0150239	A1	7/2006	Fujimori
2007/0174404	A1	7/2007	Song
2007/0174414	A1	7/2007	Song
2009/0019276	A1	1/2009	Song
2009/0019277	A1	1/2009	Song
2009/0216866	A1	8/2009	Lu
2009/0300020	A1	12/2009	Chen
2012/0084481	A1	4/2012	Reeves
2012/0272095	A1	10/2012	Liu
2013/0117502	A1	5/2013	Son
2013/0144939	A1	6/2013	Prahlad
2014/0036767	A1	2/2014	Perugupalli
2014/0089526	A1	3/2014	Schmidt
2014/0191579	A1	7/2014	Szu
2014/0317242	A1	10/2014	Koo
2016/0142891	A1	5/2016	Virhia
2016/0156682	A1	6/2016	Jeon
2017/0339251	A1	11/2017	Jagannath
2018/0102916	A1	4/2018	Chen

FOREIGN PATENT DOCUMENTS

EP	3040869	A1	7/2016
JP	2006-099234	A	4/2006
JP	2007-525756	A	9/2007
JP	2014-135881	A	7/2014
KR	2016-0048763	A	5/2014
WO	WO 2010/063985	A1	6/2010
WO	WO 2014/210172	A2	12/2014

OTHER PUBLICATIONS

International Search Report and Written Opinion of International Searching Authority for Application No. PCT/IB2017/056516, mailed Feb. 9, 2018 (11 pages).

Samsung Electronics; “Samsung Raises the Bar with Galaxy S10: More Screen, Cameras and Choices”; retrieved from <https://news.samsung.com/global/samsung-raises-the-bar-with-galaxy-s10-more-screen-cameras-and-choices>; Feb. 21, 2019 (16 pages).

“Using Google Drive—New Features, Benefits & Advantages of Google Cloud Storage”; retrieved from https://www.google.com/Intl/en_US/drive/using-drive/ on Dec. 16, 2019 (4 pages).

“Dropbox”; retrieved from <https://www.dropbox.com> on Dec. 16, 2019 (6 pages).

“iCloud: The best place for all your photos, files and more”; retrieved from <https://www.apple.com/ca/icloud/> on Dec. 16, 2019 (15 pages).

“Resilio: Connecting Massive Data Flows”; retrieved from <https://www.resilio.com/> on Dec. 16, 2019 (9 pages).

“Librevault: File synchronization designed with privacy in mind”; retrieved from <https://librevault.com/> on Dec. 16, 2019 (2 pages).

“Tonido—Run Your Personal Cloud. A Free Private Cloud Server”; retrieved from <https://www.tonido.com/> on Dec. 16, 2019 (5 pages).

“ASUS PadFone X (US)”; retrieved from https://www.asus.com/us/Phone/ASUS_PadFone_X_US/ on Dec. 16, 2019 (6 pages).

“HP Elite x3: The one device that’s every device”; retrieved from <https://www8.hp.com/ca/en/ads/elitex3/overview.html> on Dec. 16, 2019 (10 pages).

“Fuchsia is not Linux”; retrieved from <https://fuchsia.dev/fuchsia-src/concepts> on Dec. 16, 2019 (4 pages).

“RSA Data Privacy & Security Survey 2019: The Growing Data Disconnect”; retrieved from <https://www.rsa.com/content/dam/misc/rsa-data-privacy-and-security-survey-2019.pdf>; publication date unknown (16 pages).

“Samsung Raises the Bar with Galaxy S10: More Screen, Cameras and Choices”; retrieved from <https://news.samsung.com/global/samsung-raises-the-bar-with-galaxy-s10-more-screen-cameras-and-choices> on Dec. 16, 2019; Feb. 21, 2019 (14 pages).

“Zion | Exodus”; retrieved from <https://www.htcexodus.com/eu/zion/>, on Dec. 16, 2019; copyright 2011-2019 (3 pages).

“Blockchain Phone | Sirin Phone”; retrieved from <https://shop.sirinlabs.com/>, on Dec. 16, 2019 (7 pages).

“VaultTel”; retrieved from <https://vaulttel.net/>, on Dec. 16, 2019 (2 pages).

“Librevault features overview”; May 22, 2016; retrieved from <https://librevault.com/blog/features/>, on Dec. 16, 2019 (2 pages).

European Patent Office, Examination Report for European Patent Application No. 17805258.5, dated Oct. 14, 2021 (10 pages).

Caceres, R. et al.; “Reincarnating pcs with portable soulpads”; Proceedings of the 3rd International Conference on Mobile Systems, Applications, and Services; Jun. 6, 2005 (pp. 65-78); ACM, New York, NY 10121-0701.

“Bootling—Wikipedia”; Jun. 2, 2001; retrieved from <https://en.wikipedia.org/w/index.php?>.

“Live USB—Wikipedia”; May 19, 2001; retrieved from <https://en.wikipedia.org/w/index.php?>.

European Patent Office, “Written Opinion of the International Searching Authority” for PCT/IB2022/055501, mailed Sep. 30, 2022.

European Patent Office; “International Search Report” for PCT/IB2022/055501, mailed Sep. 30, 2022.

“Soulpad—Wikipedia”; May 15, 2016; retrieved from <https://en.wikipedia.org/w/index.php> (3 pages).

Singer, M.; “IBM brains capture a PC’s soul”; CNET, Aug. 12, 2005; retrieved from <https://www.cnet.com/culture/ibm-brains-capture-a-pcs-soul> (3 pages).

Raghunath, M. et al.; “Reincarnating pcs with portable soulpads”; in IBM Research Division, Thomas J. Watson Research Center, Nov. 8, 2004 (15 pages).

Knight, W.; “Pocket-sized computer ‘soul’ developed”; New Scientist, Aug. 10, 2005 (2 pages).

Notice of Preliminary Rejection in Korean Patent Application No. KR 10-2019-7105081, with English translation, mailed May 23, 2022 (12 pages).

FIG. 1

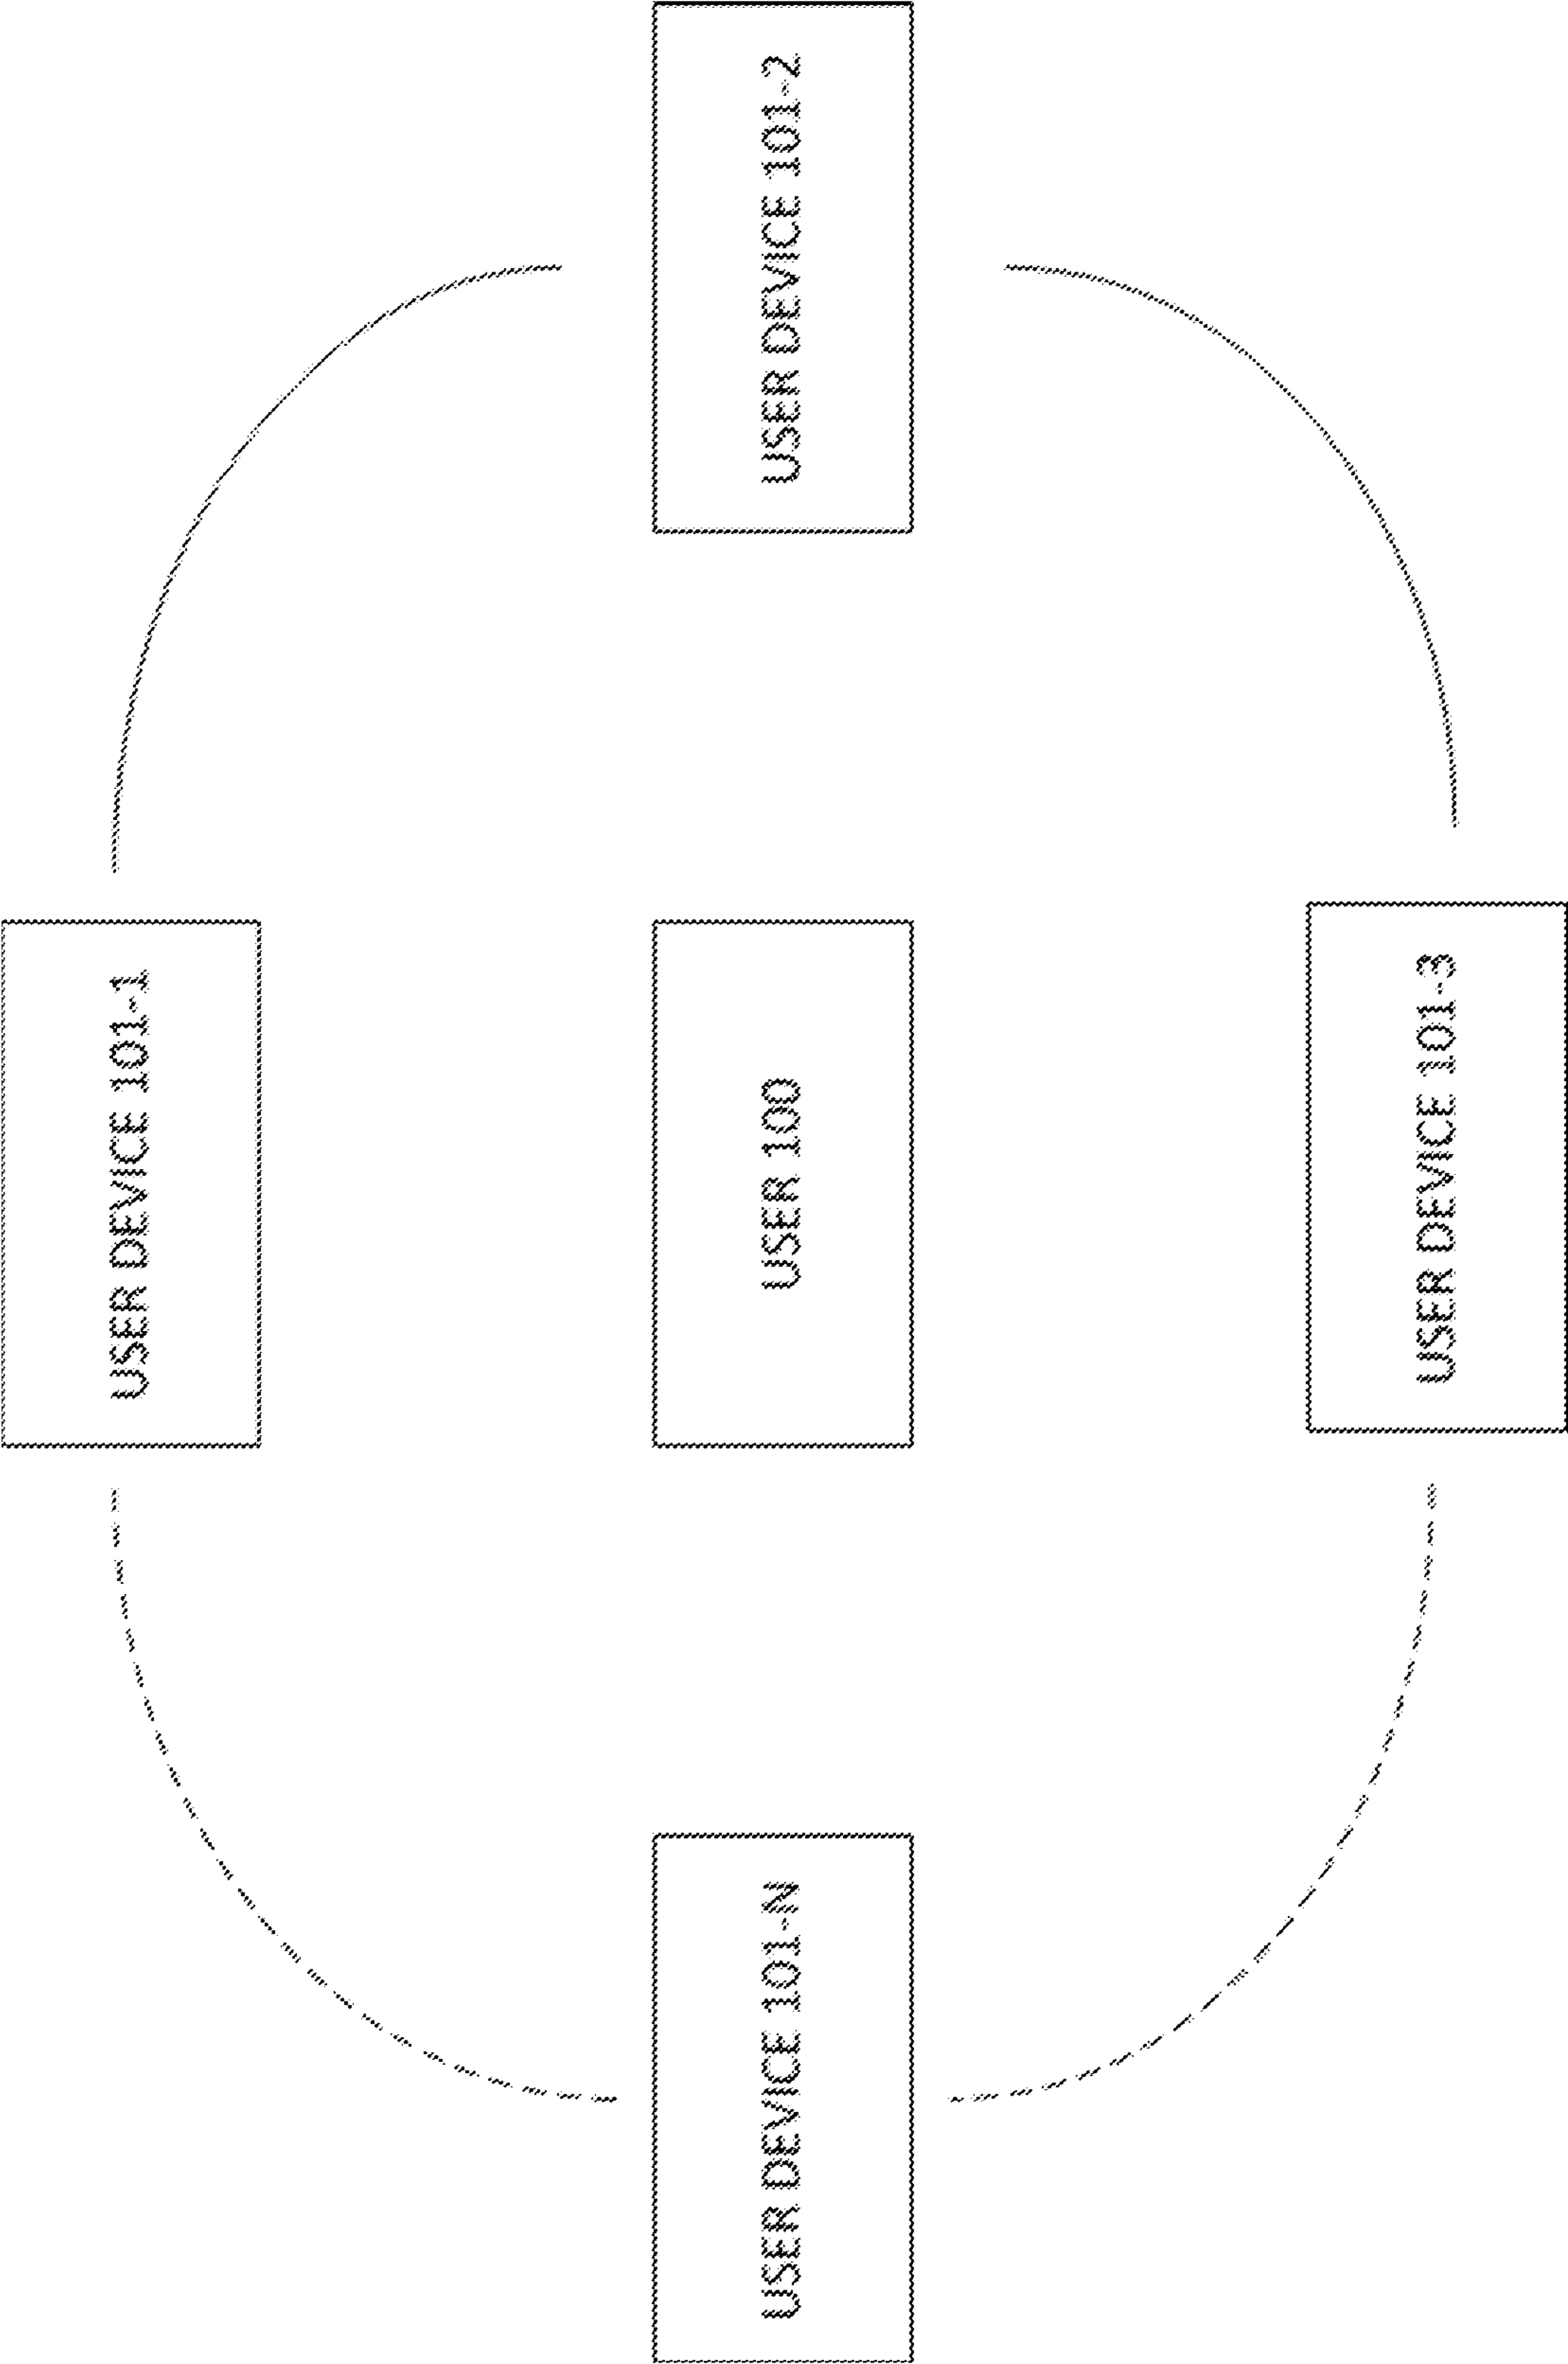


FIG. 2

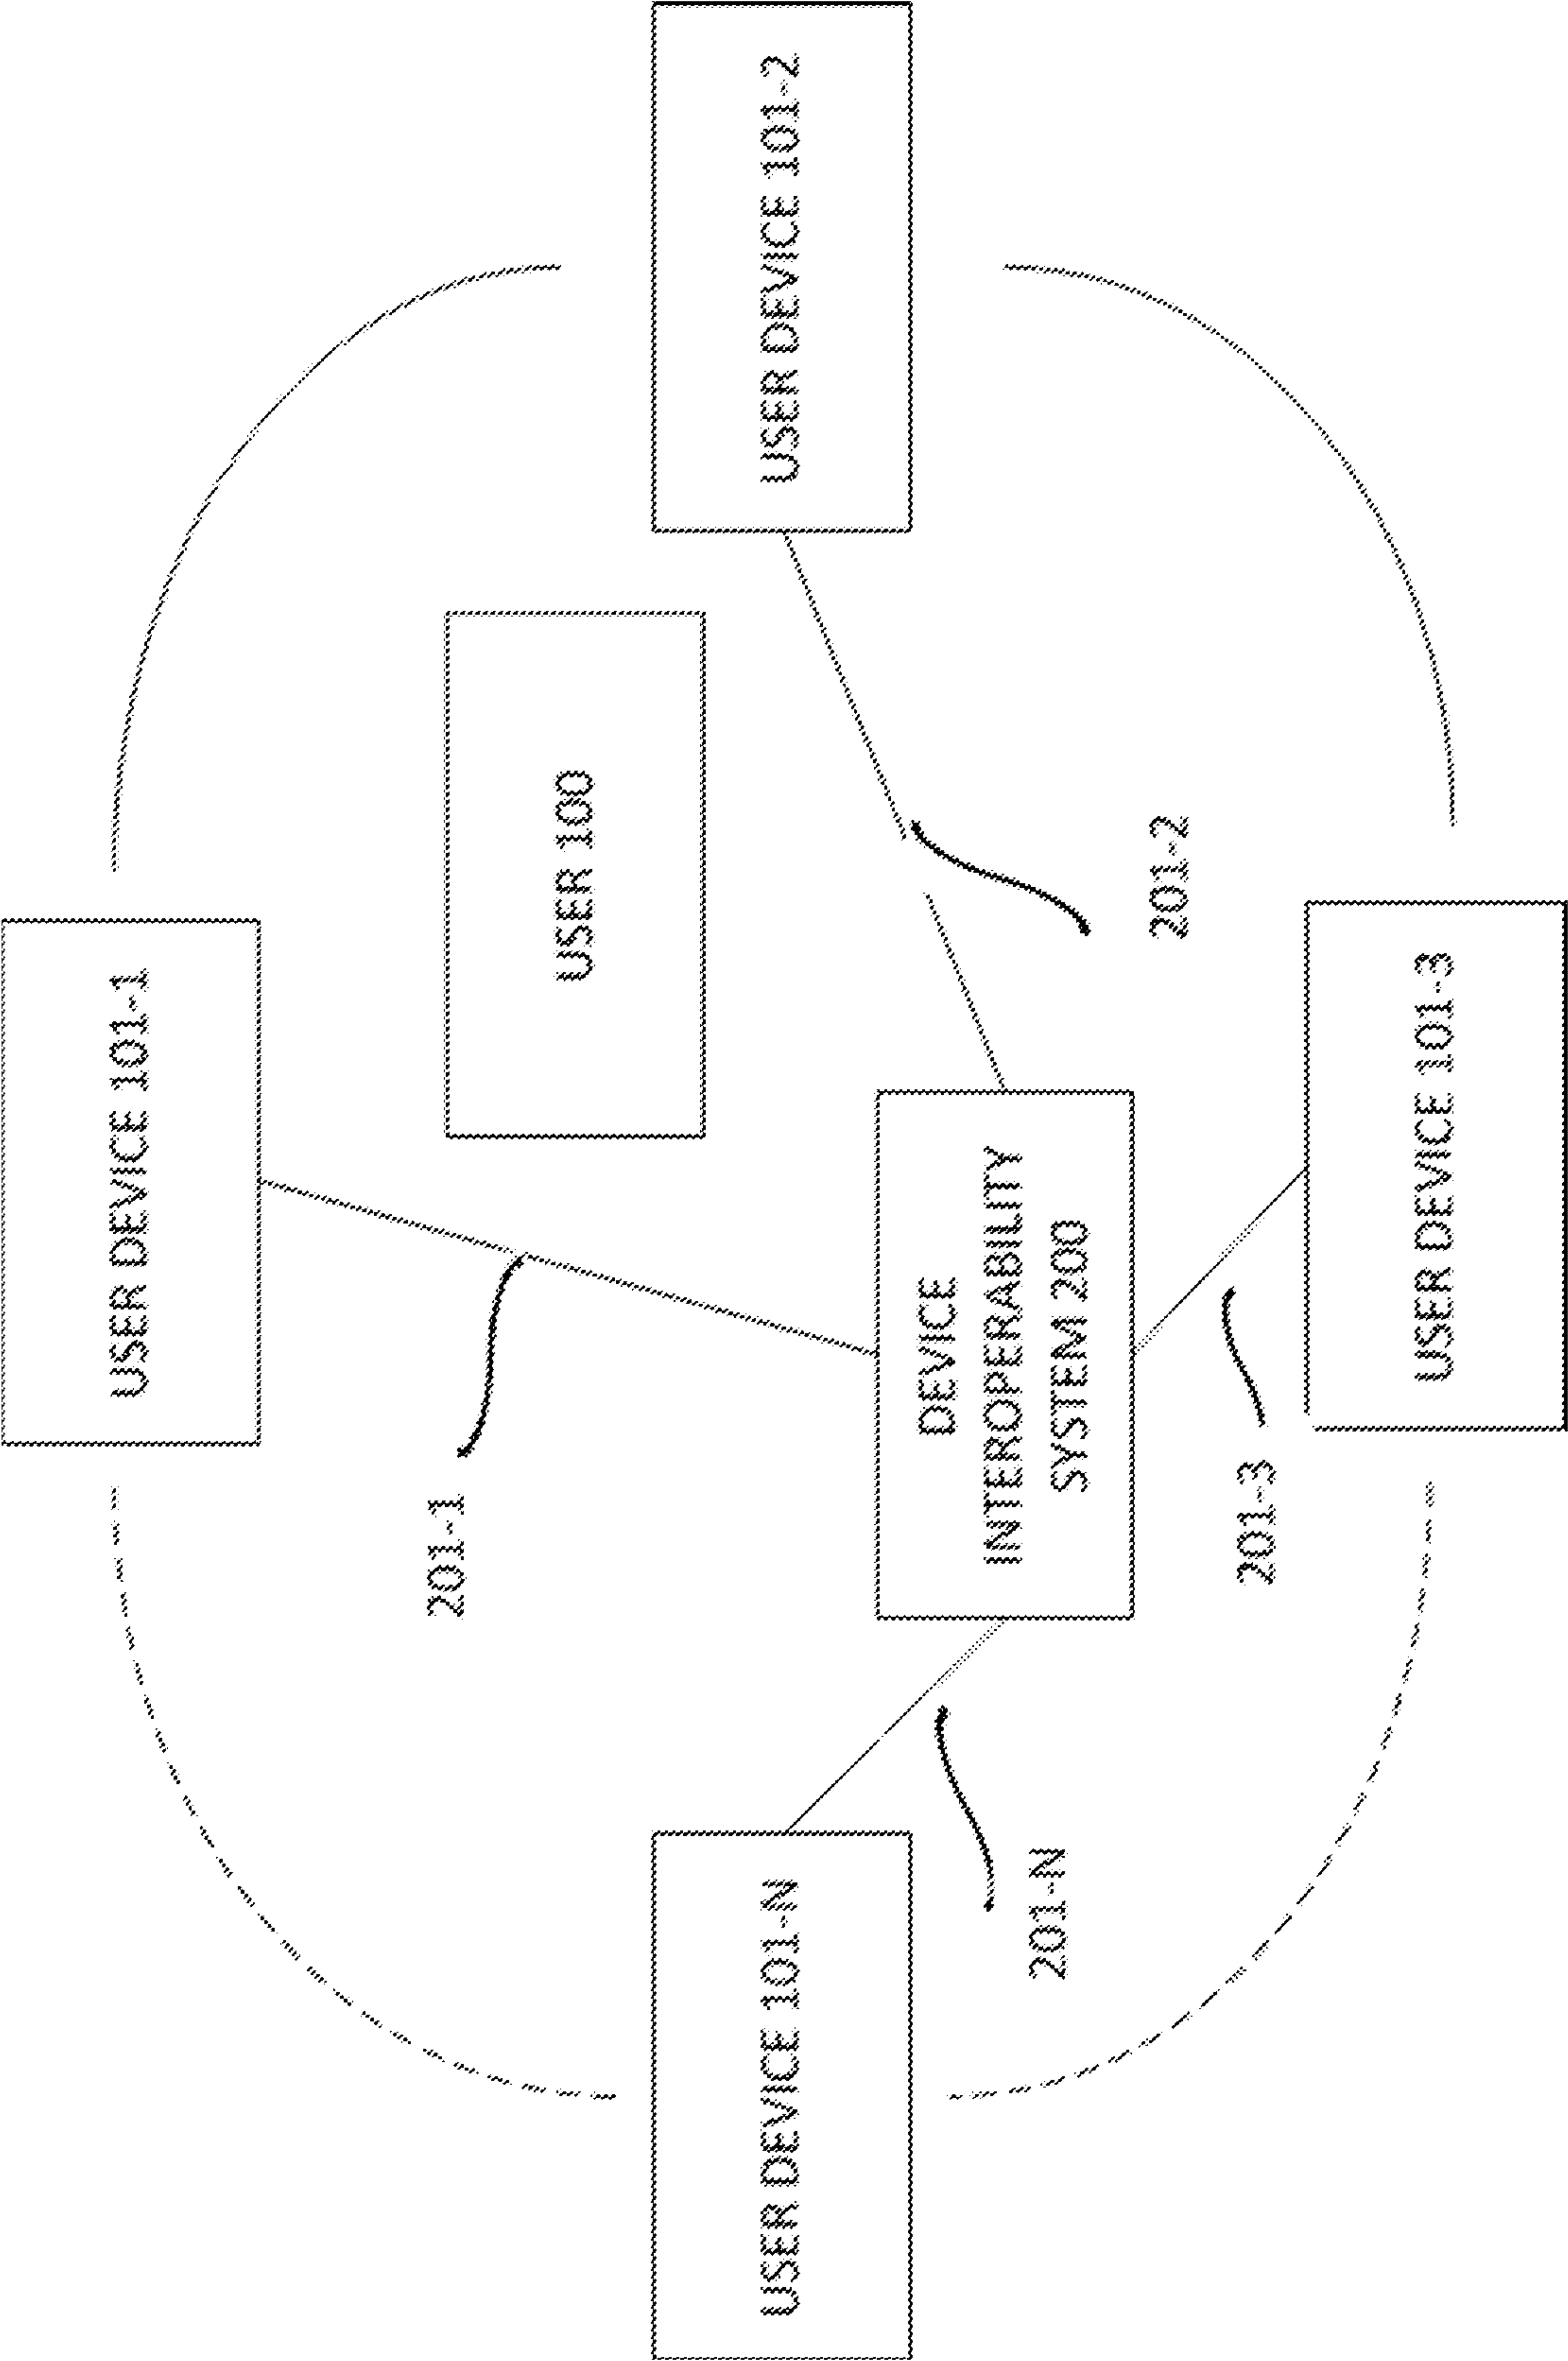


FIG. 2B

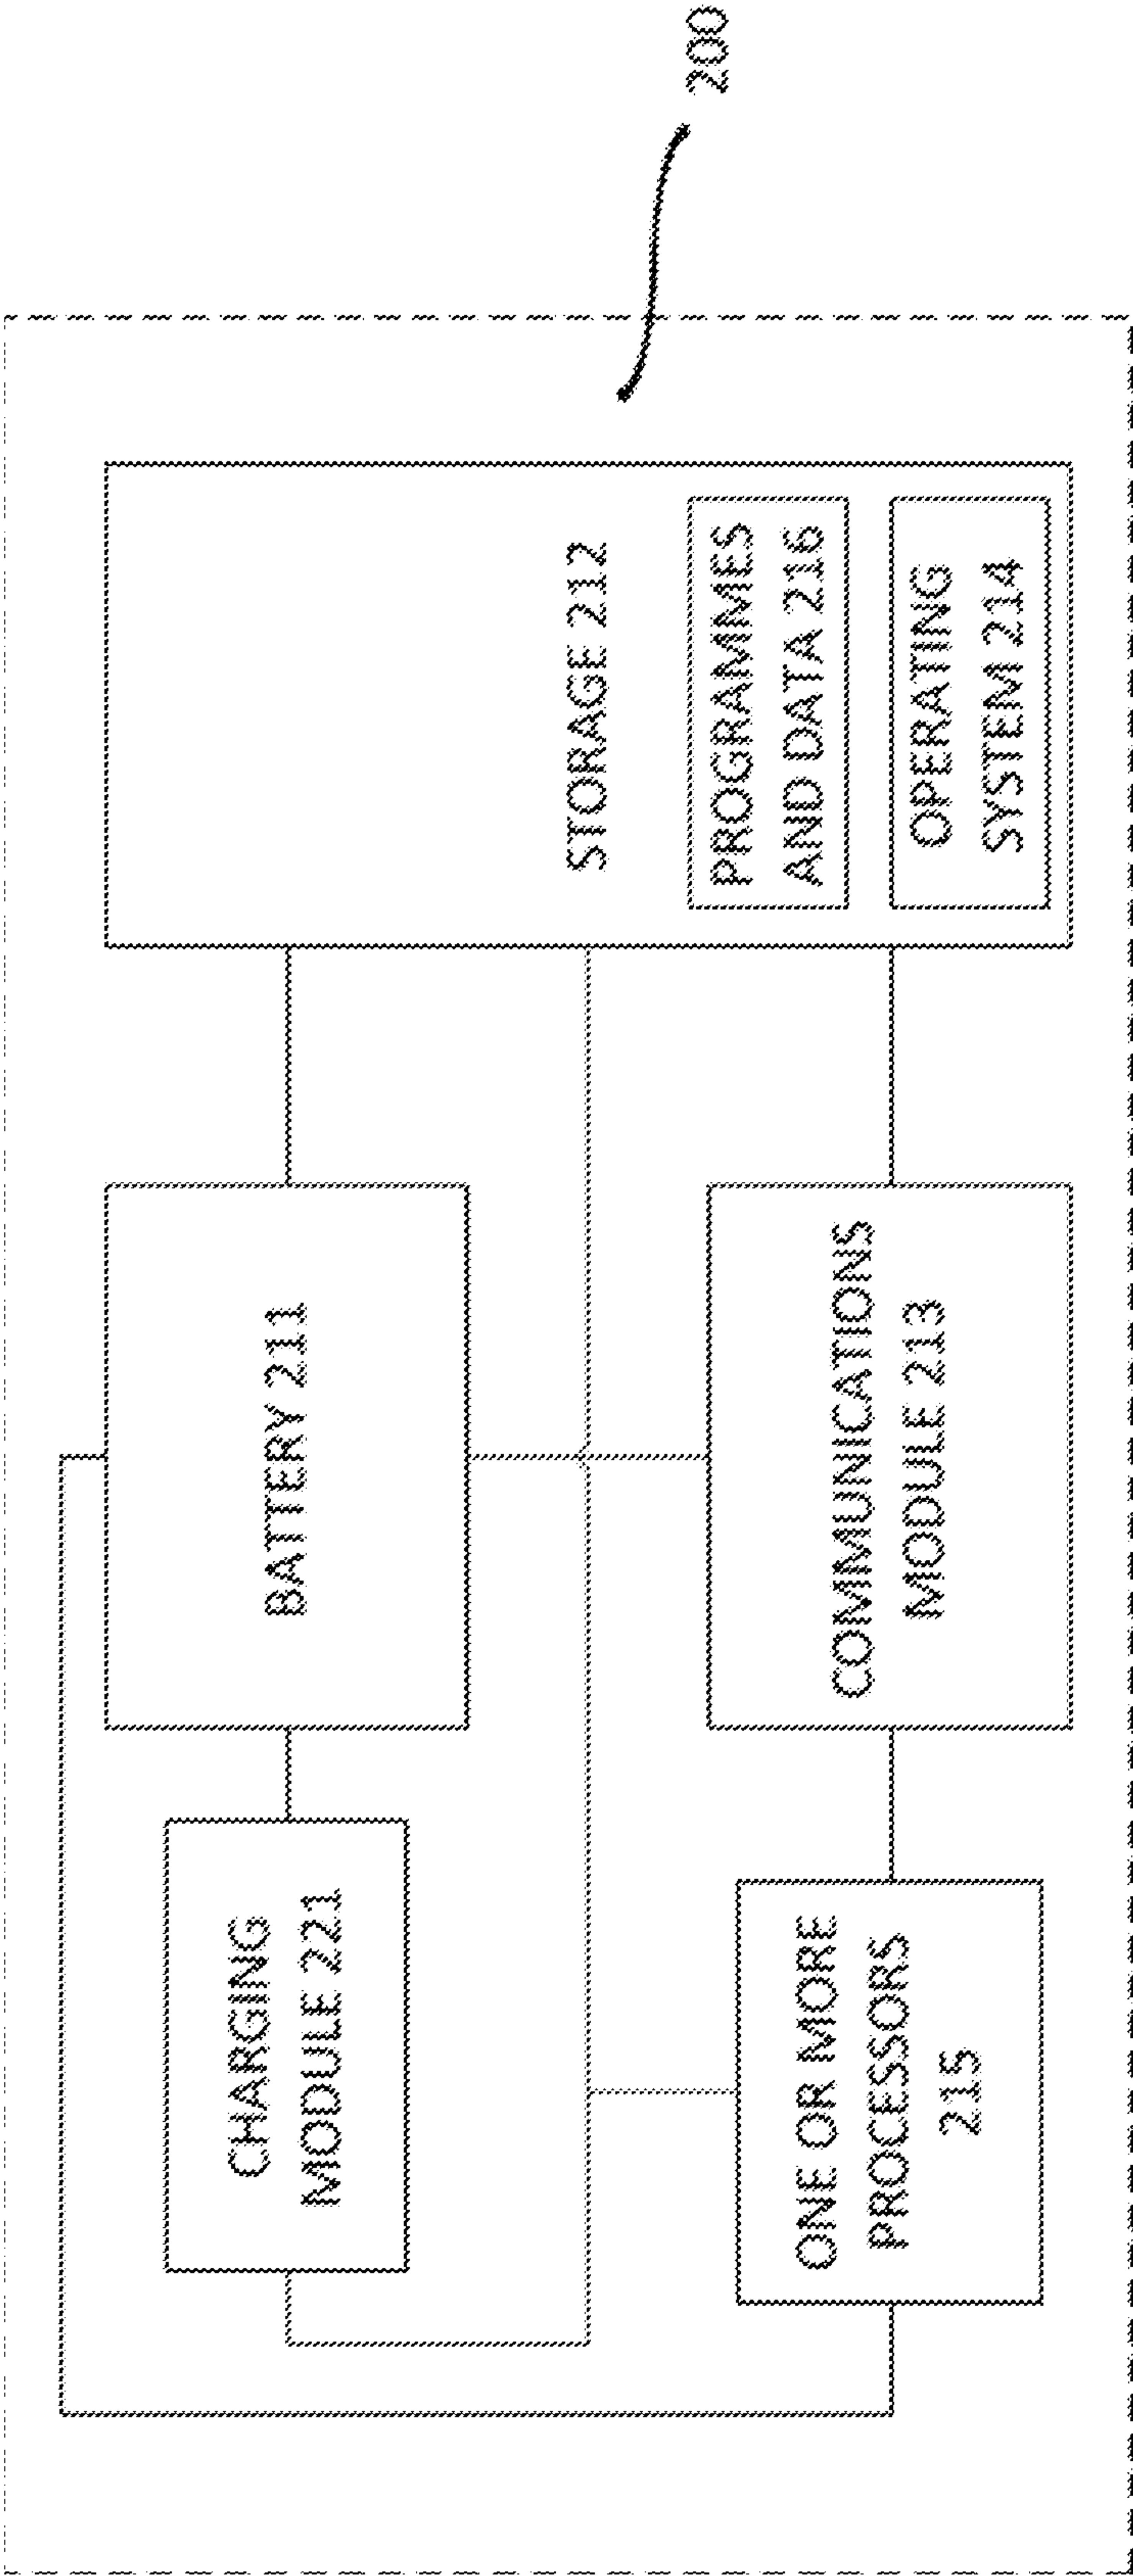


FIG. 2C

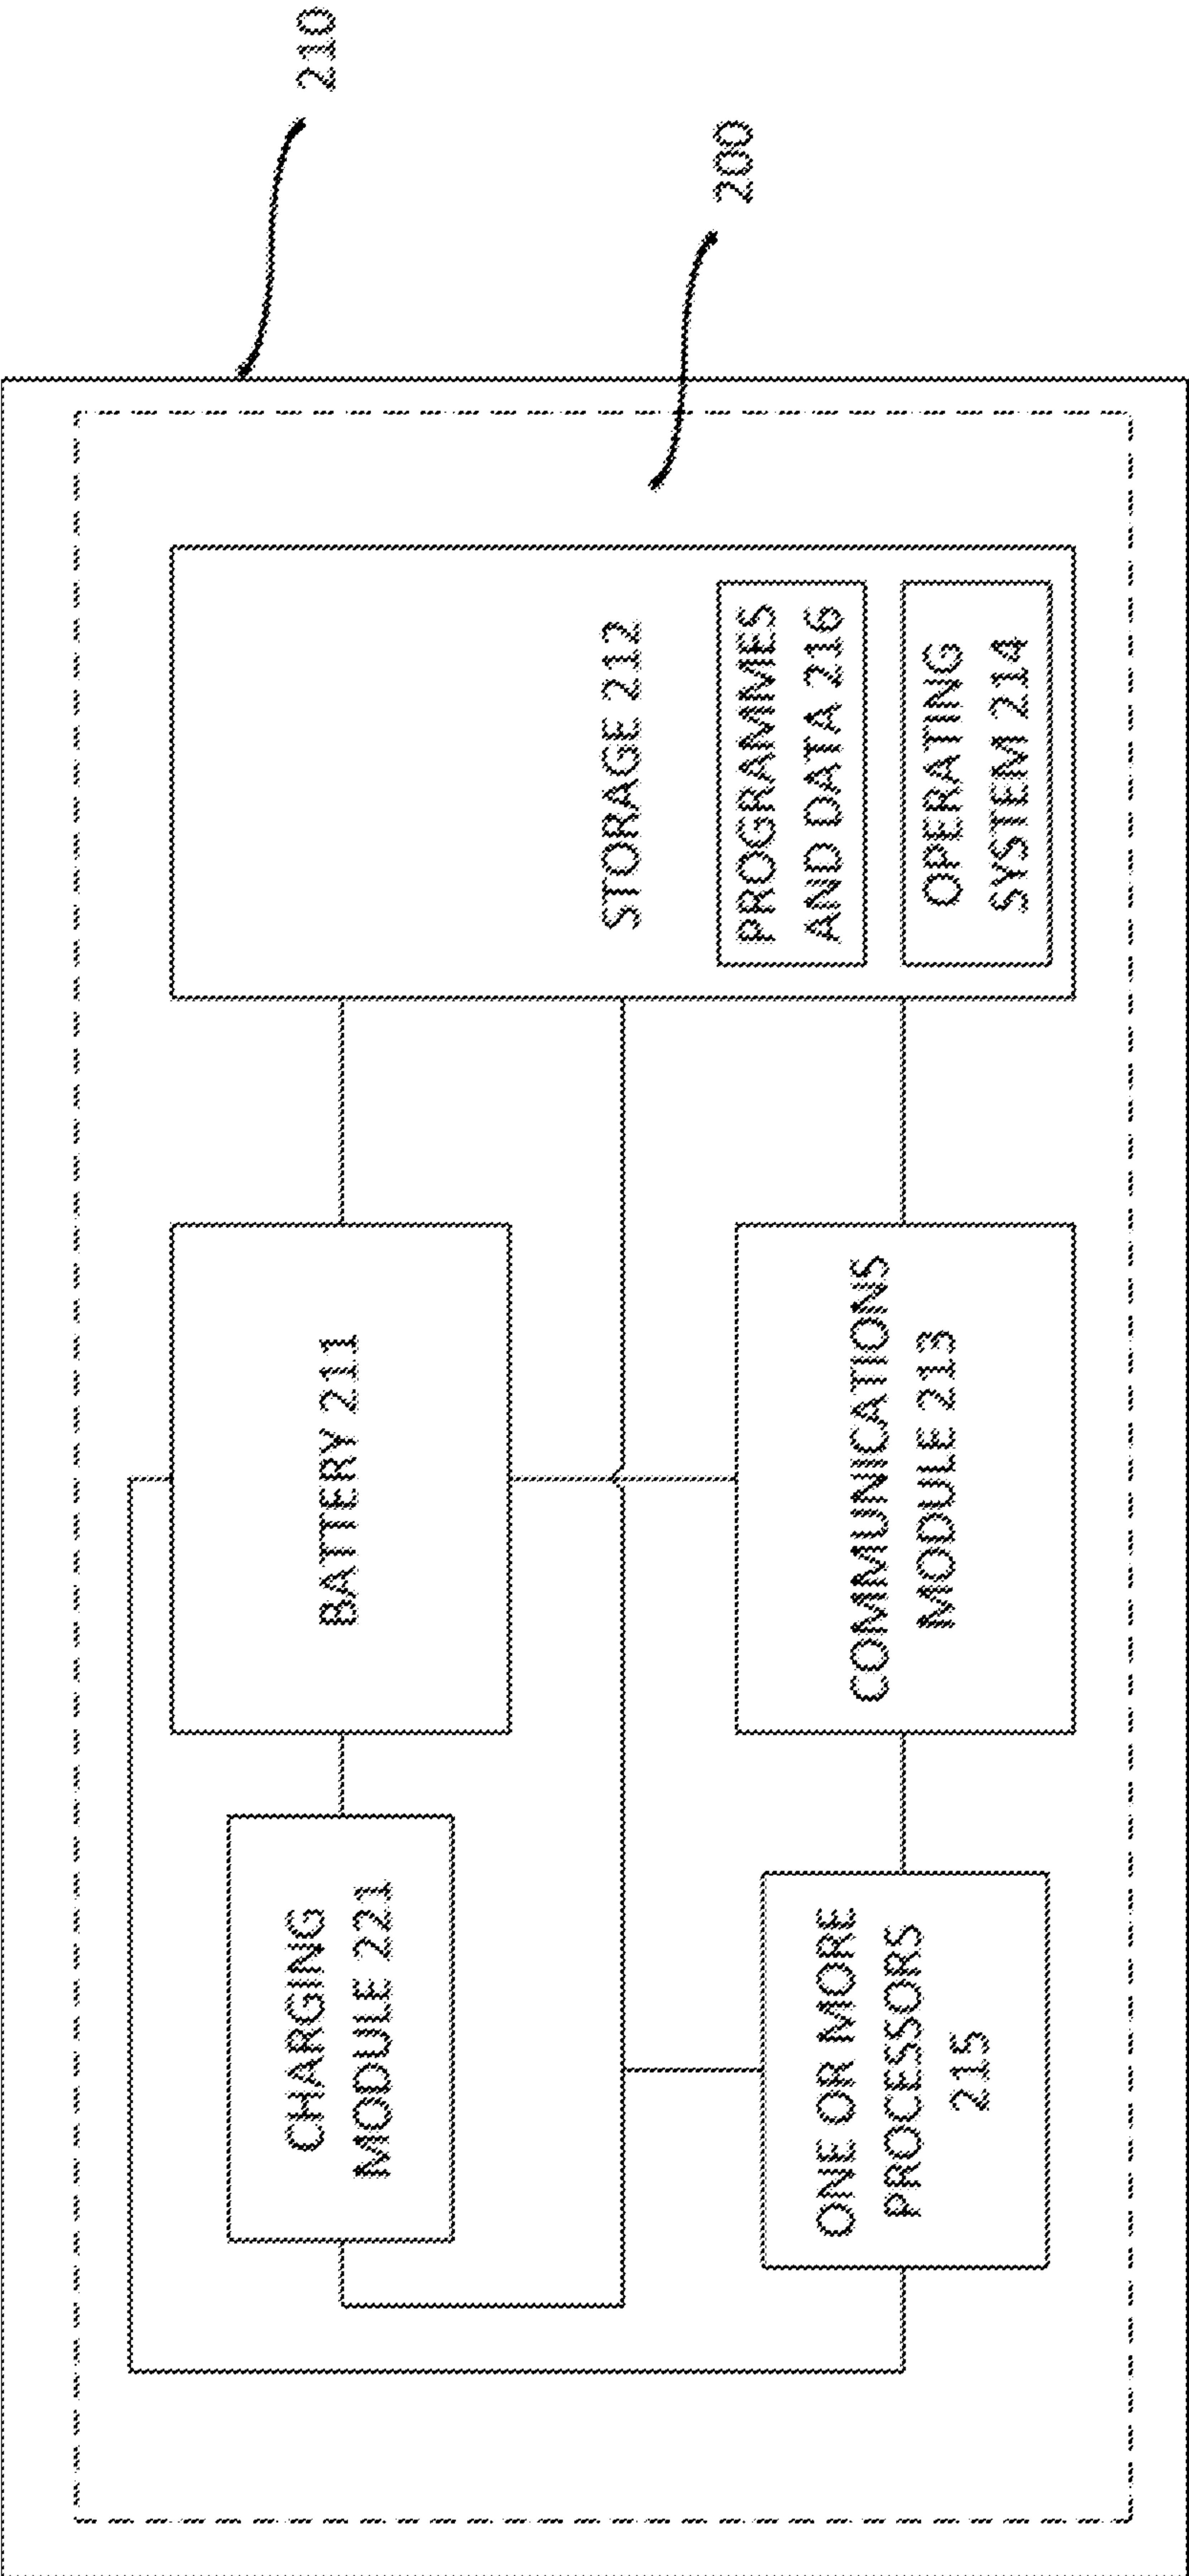


FIG. 2D

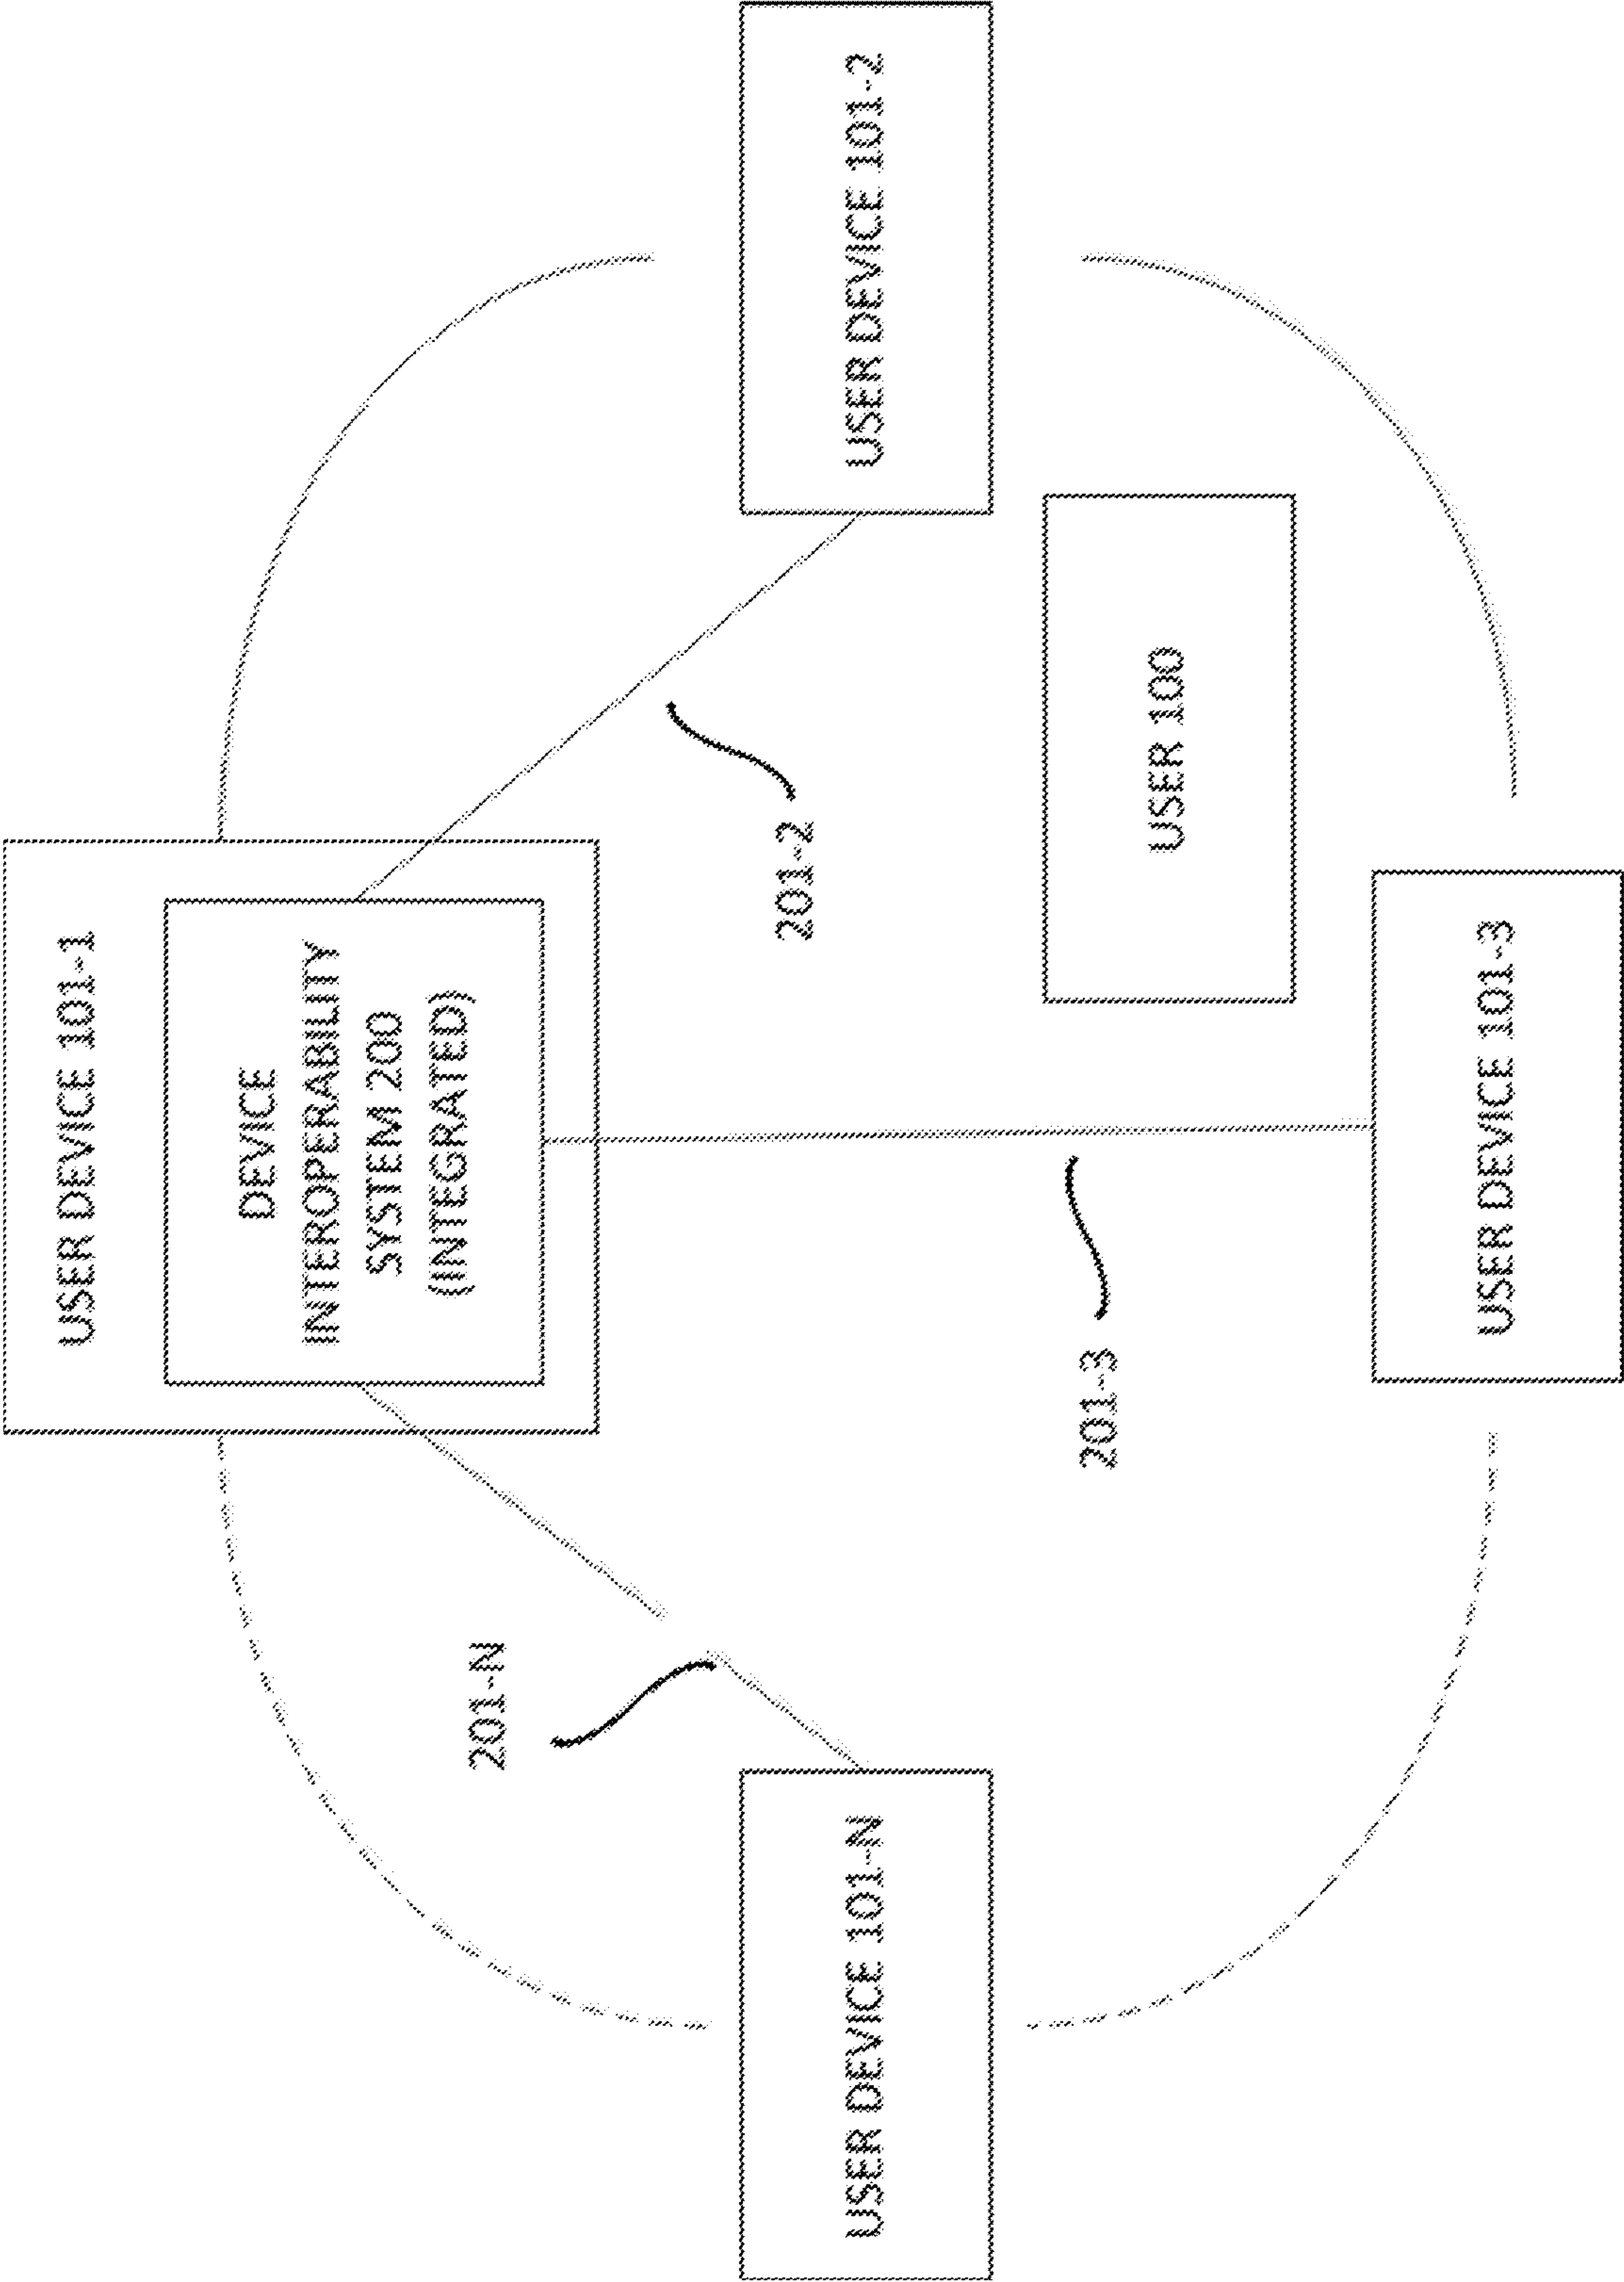
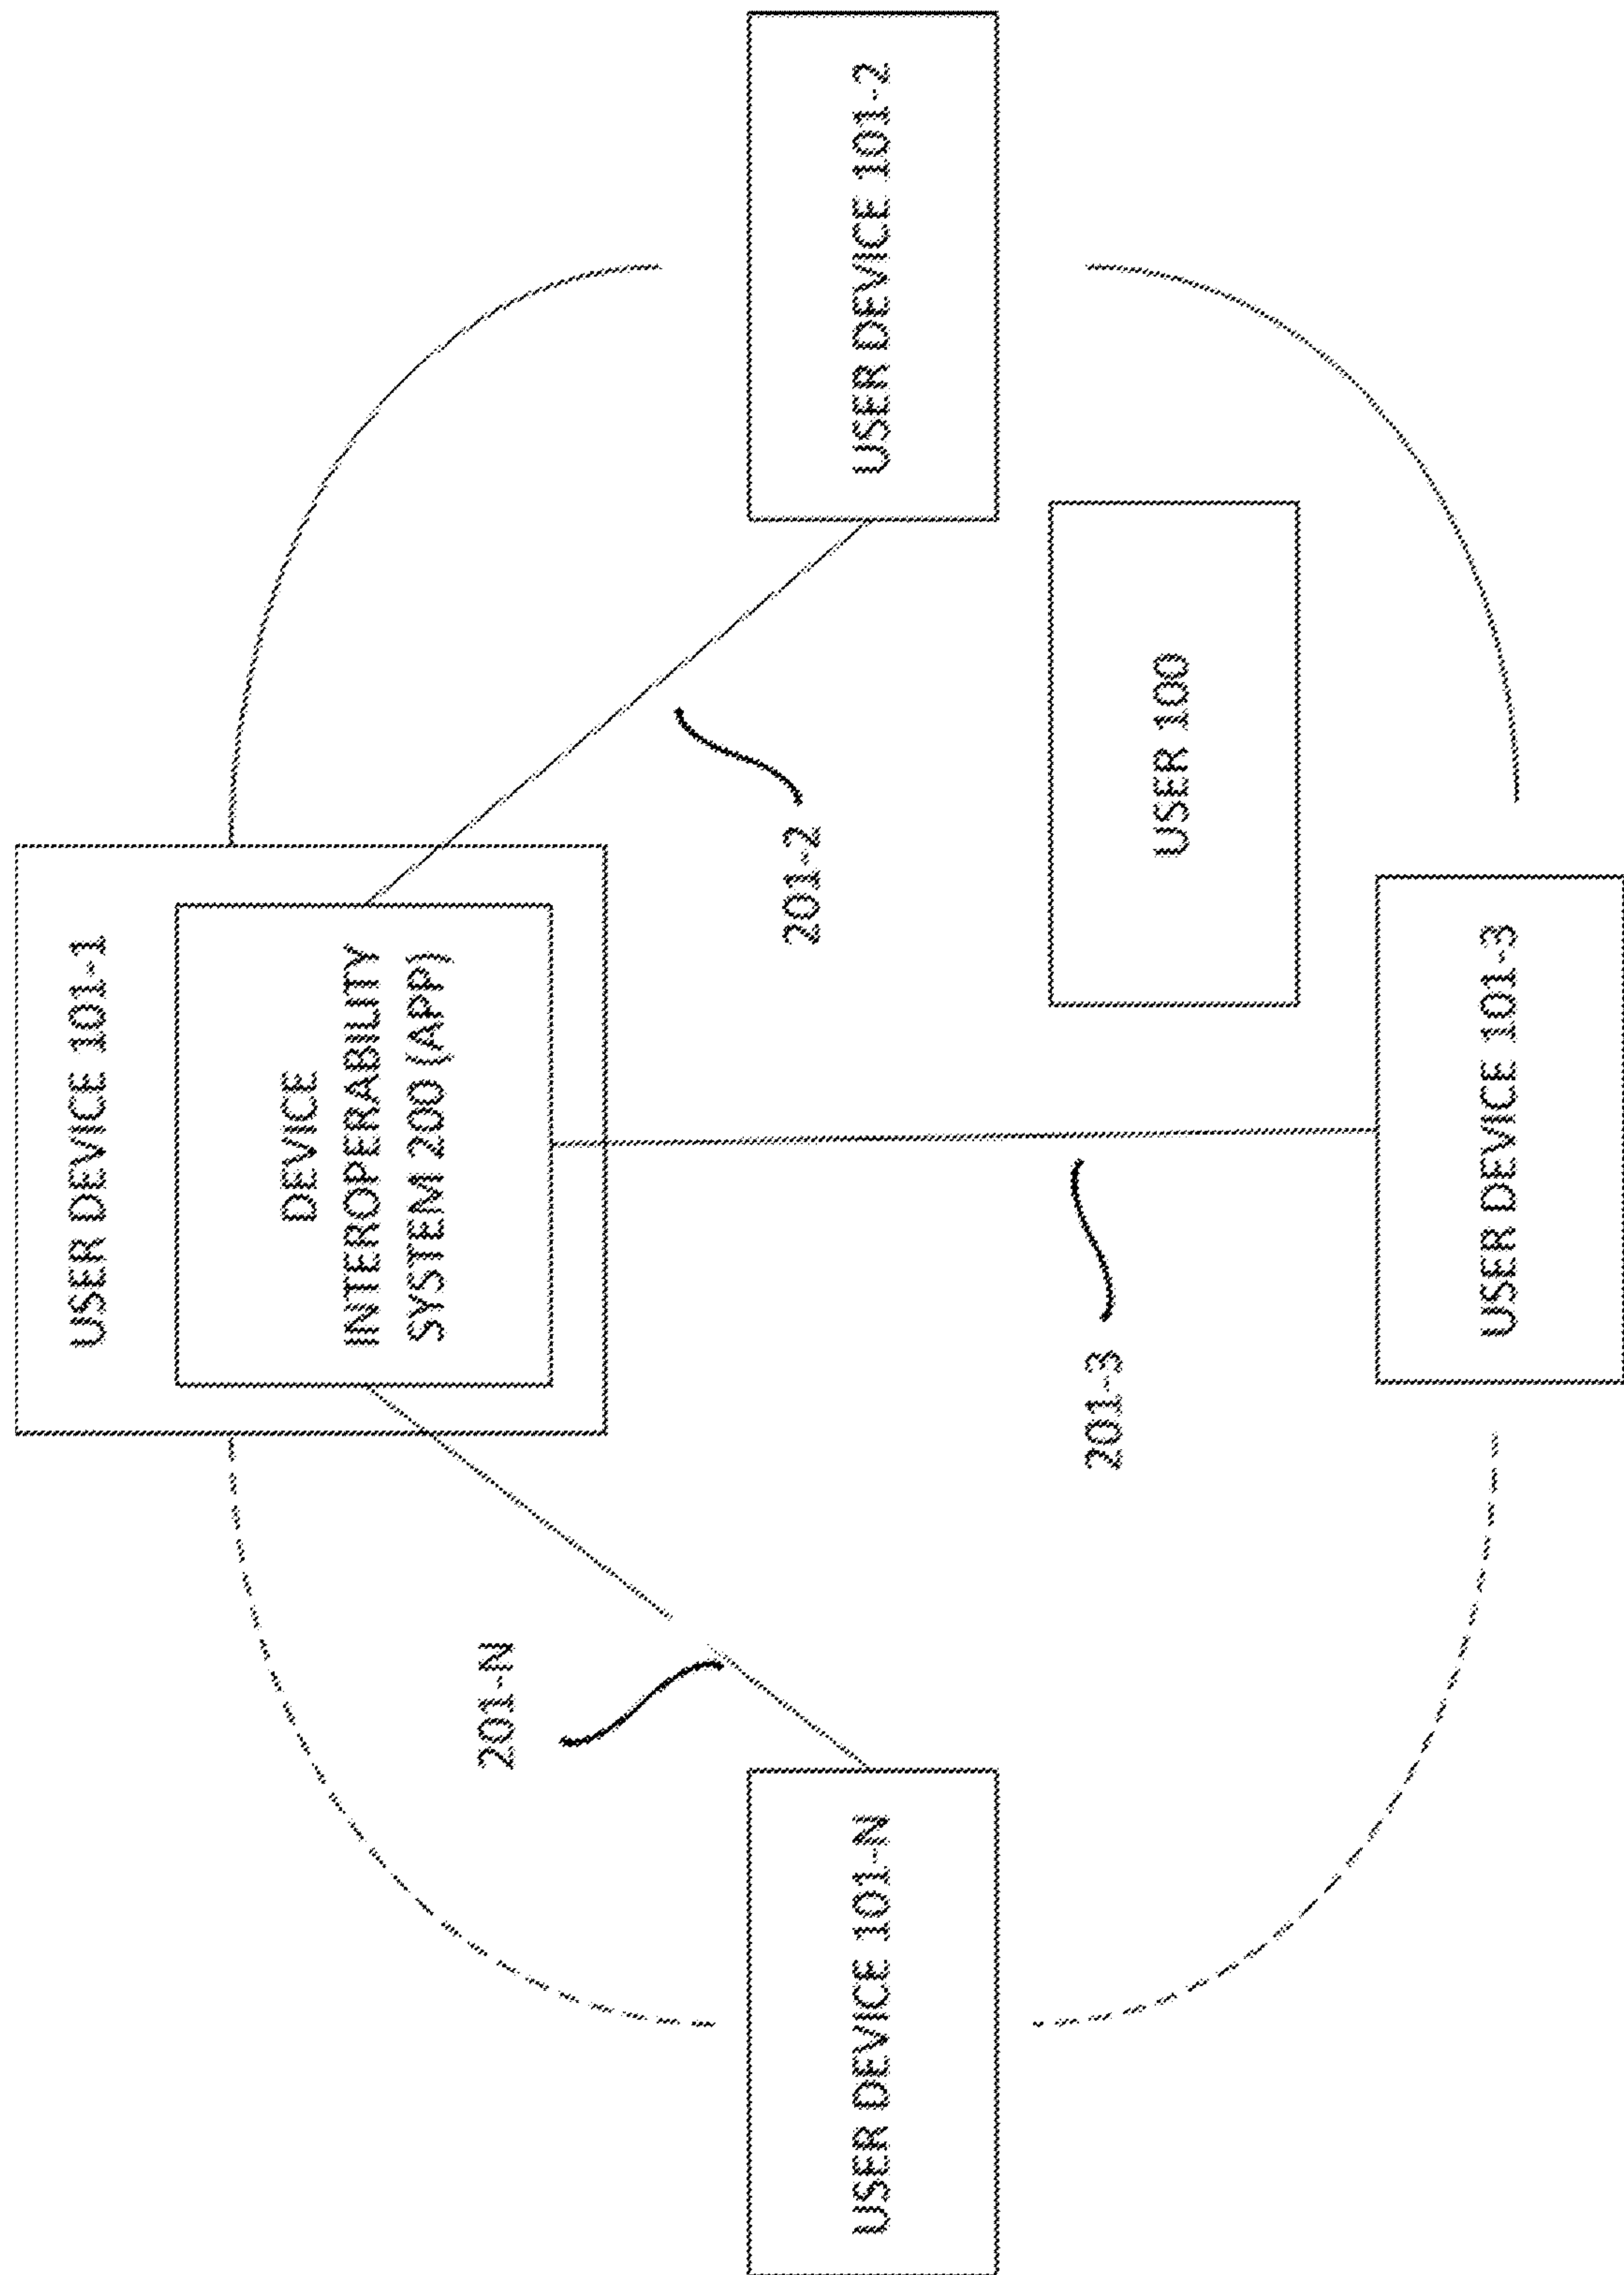


FIG. 2E



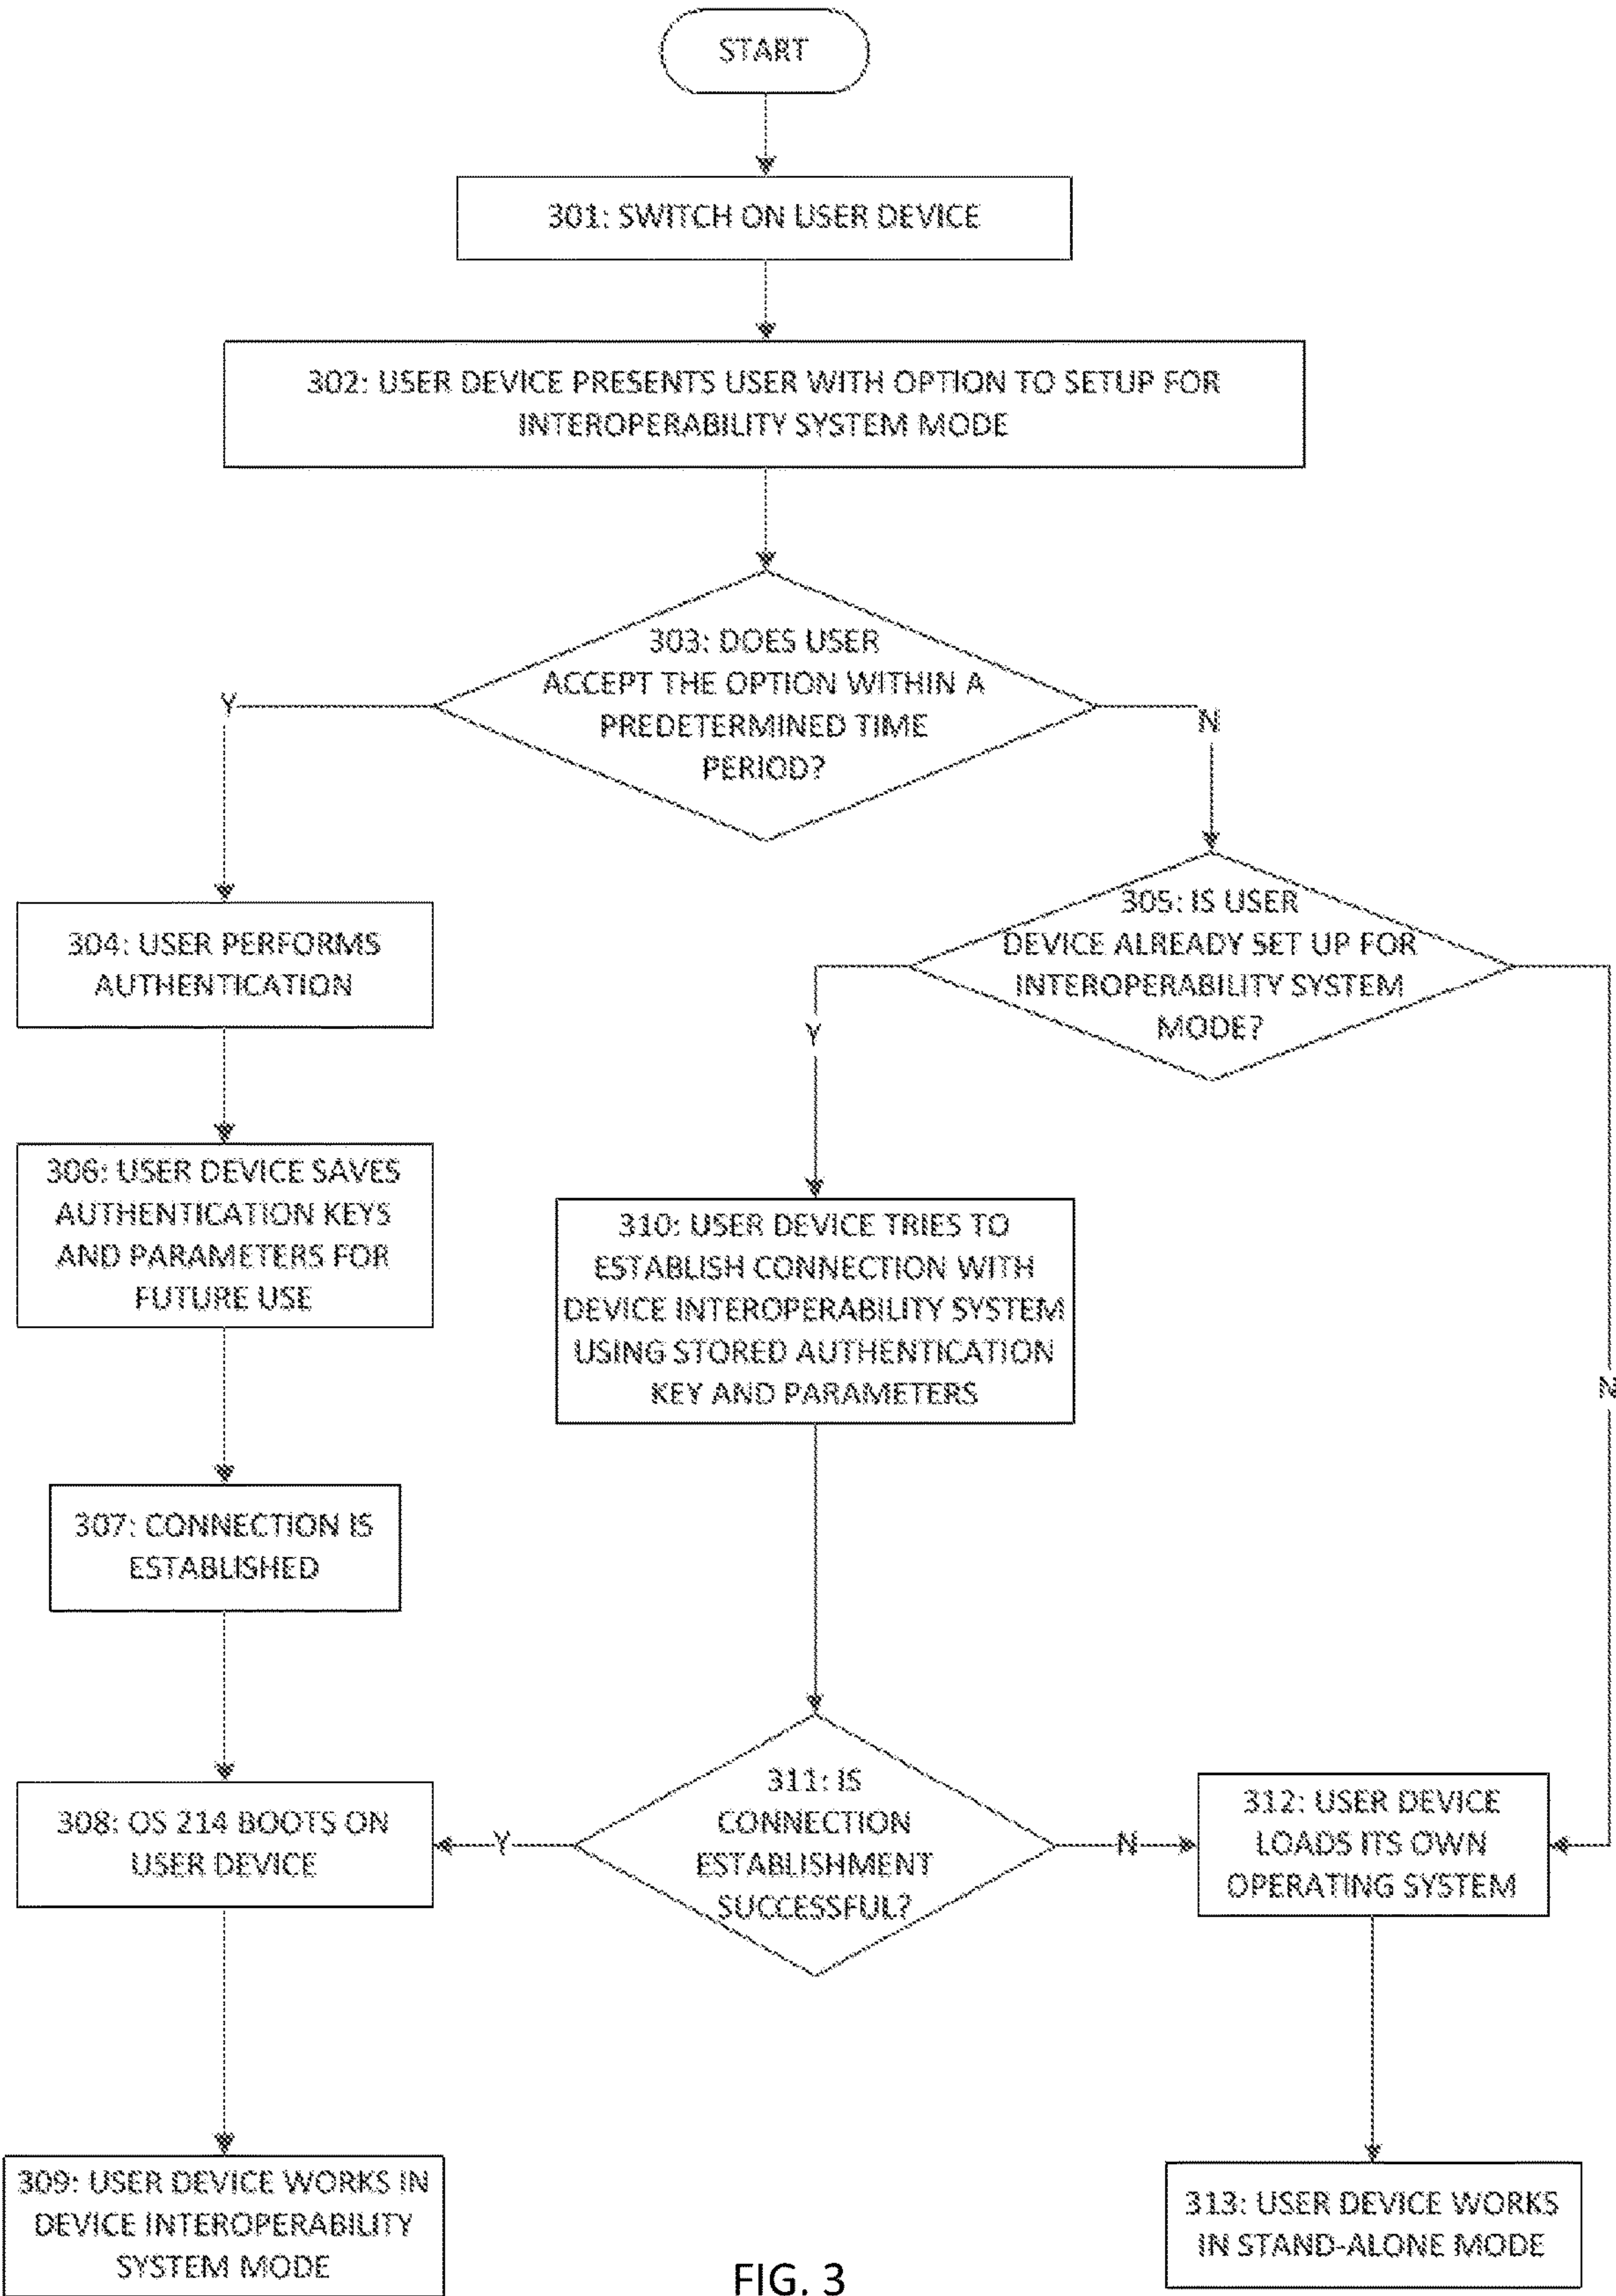


FIG. 3

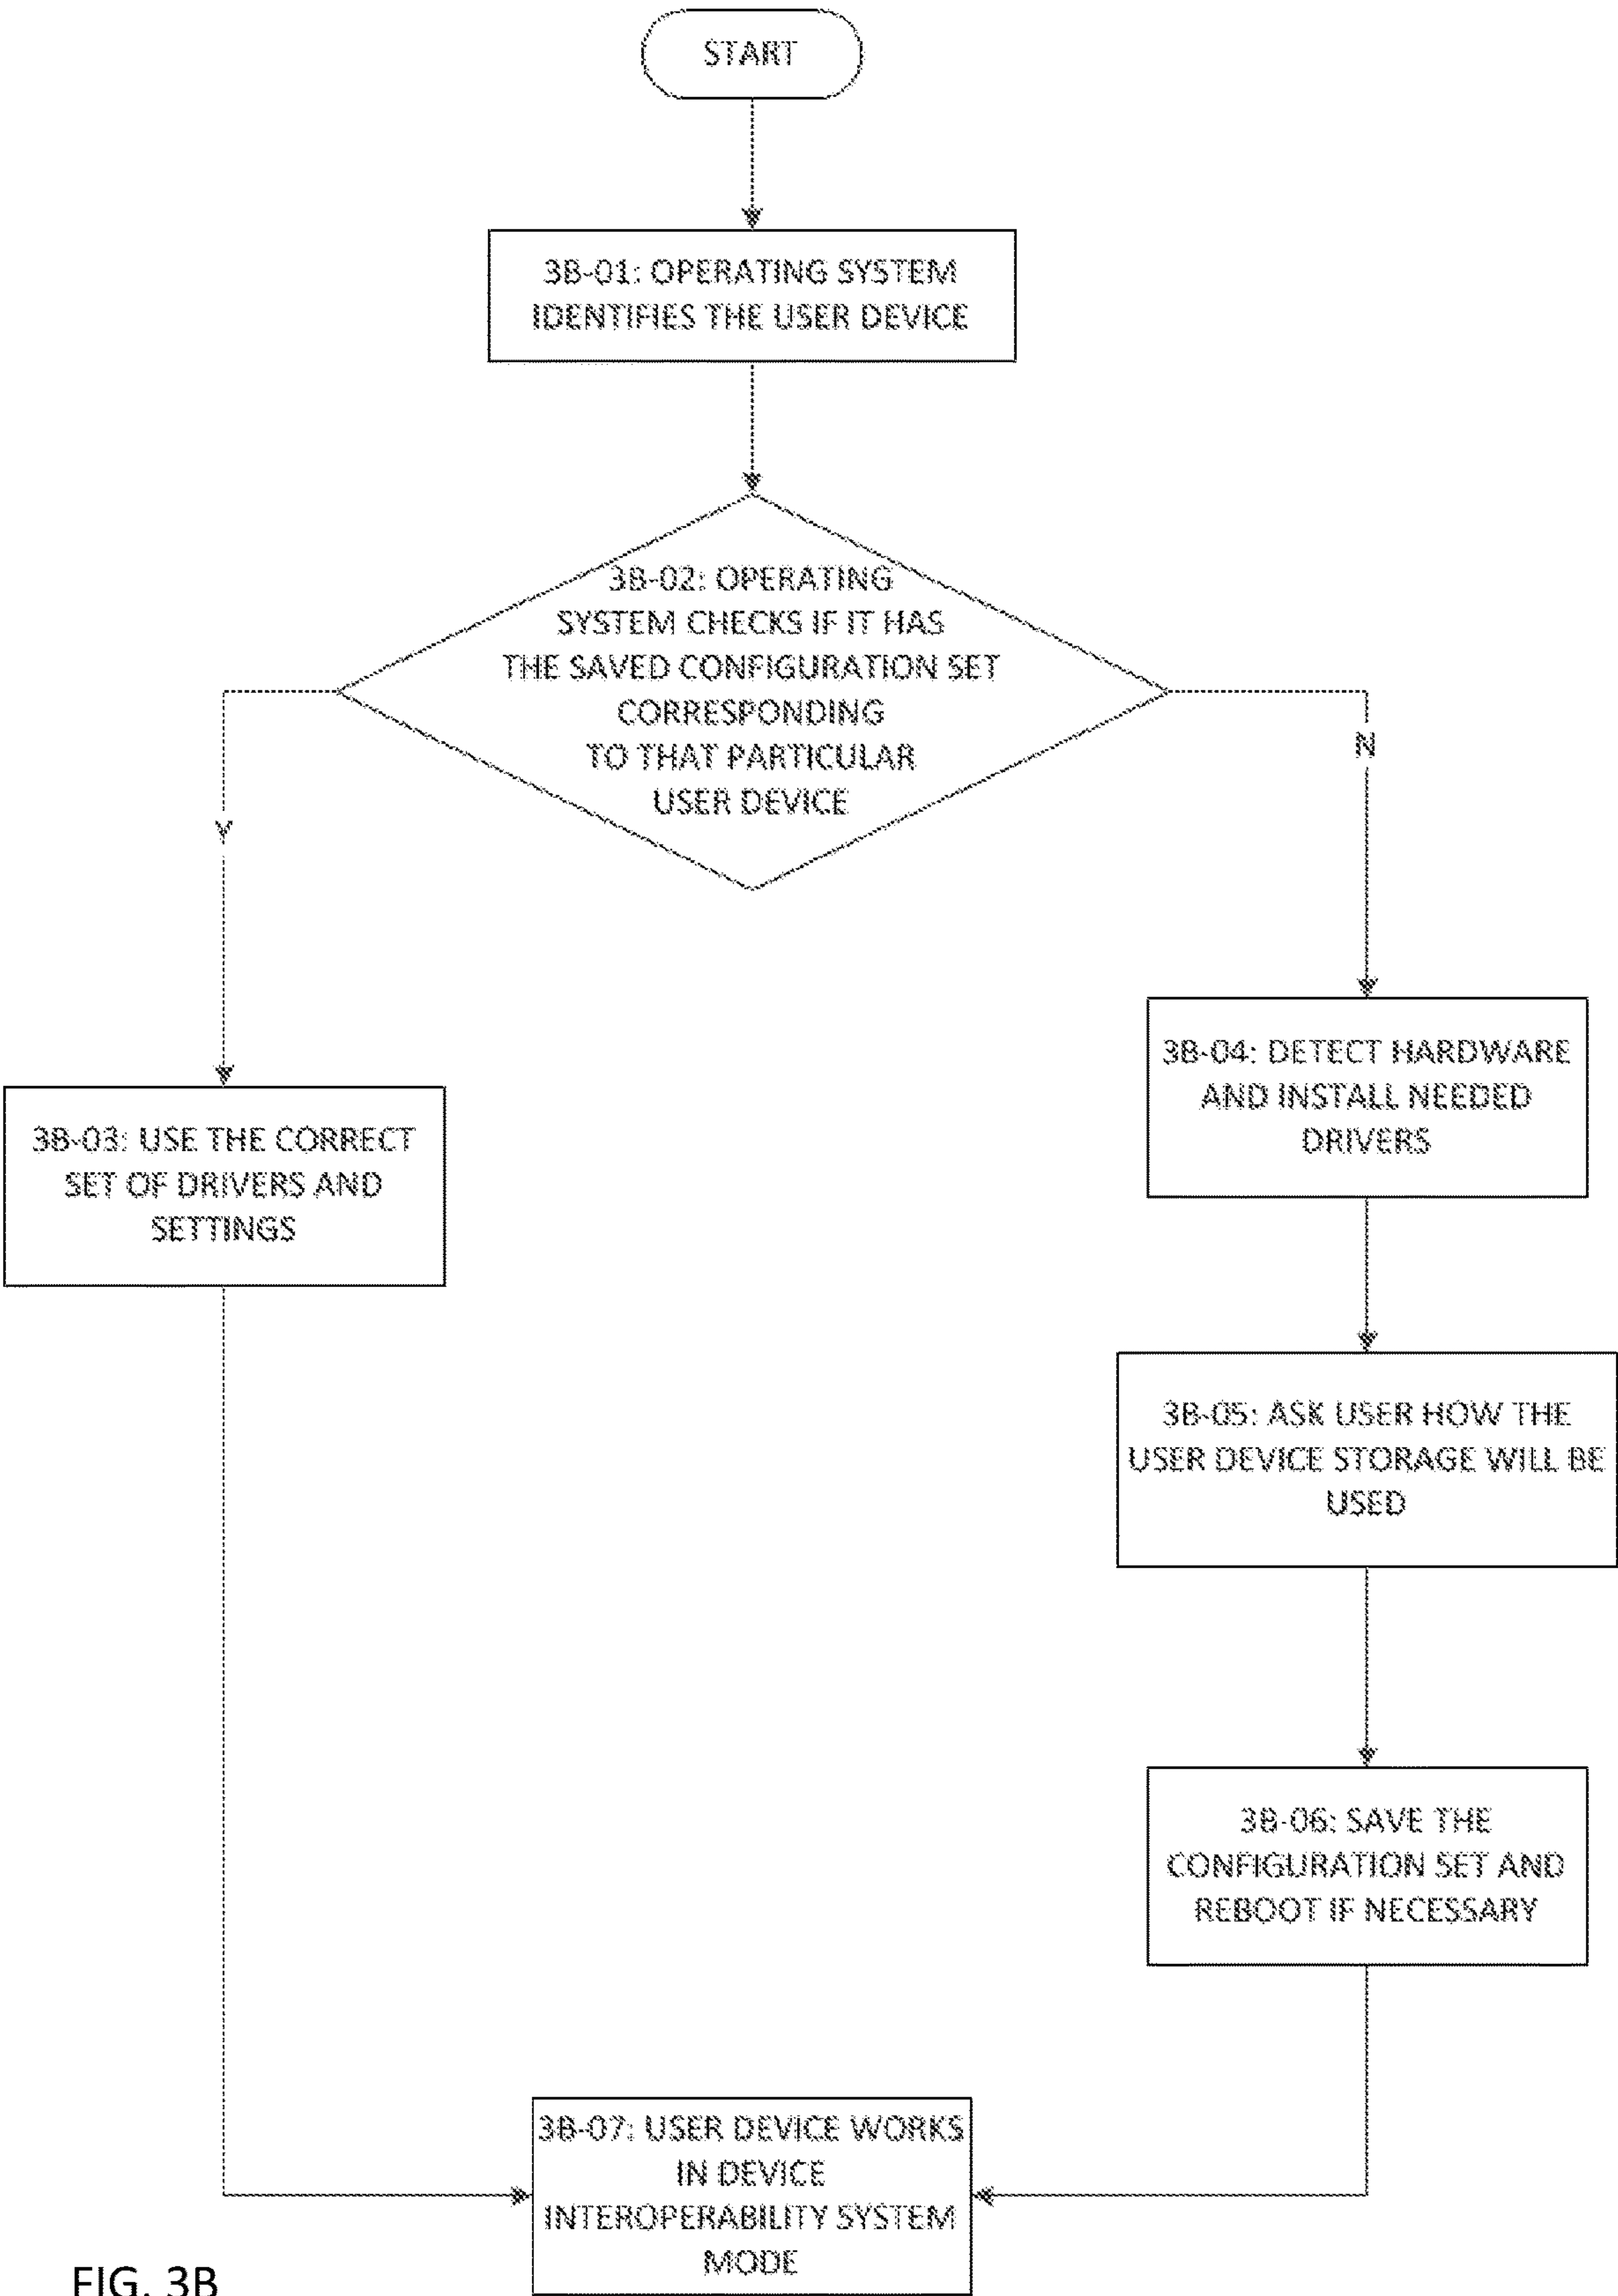


FIG. 4

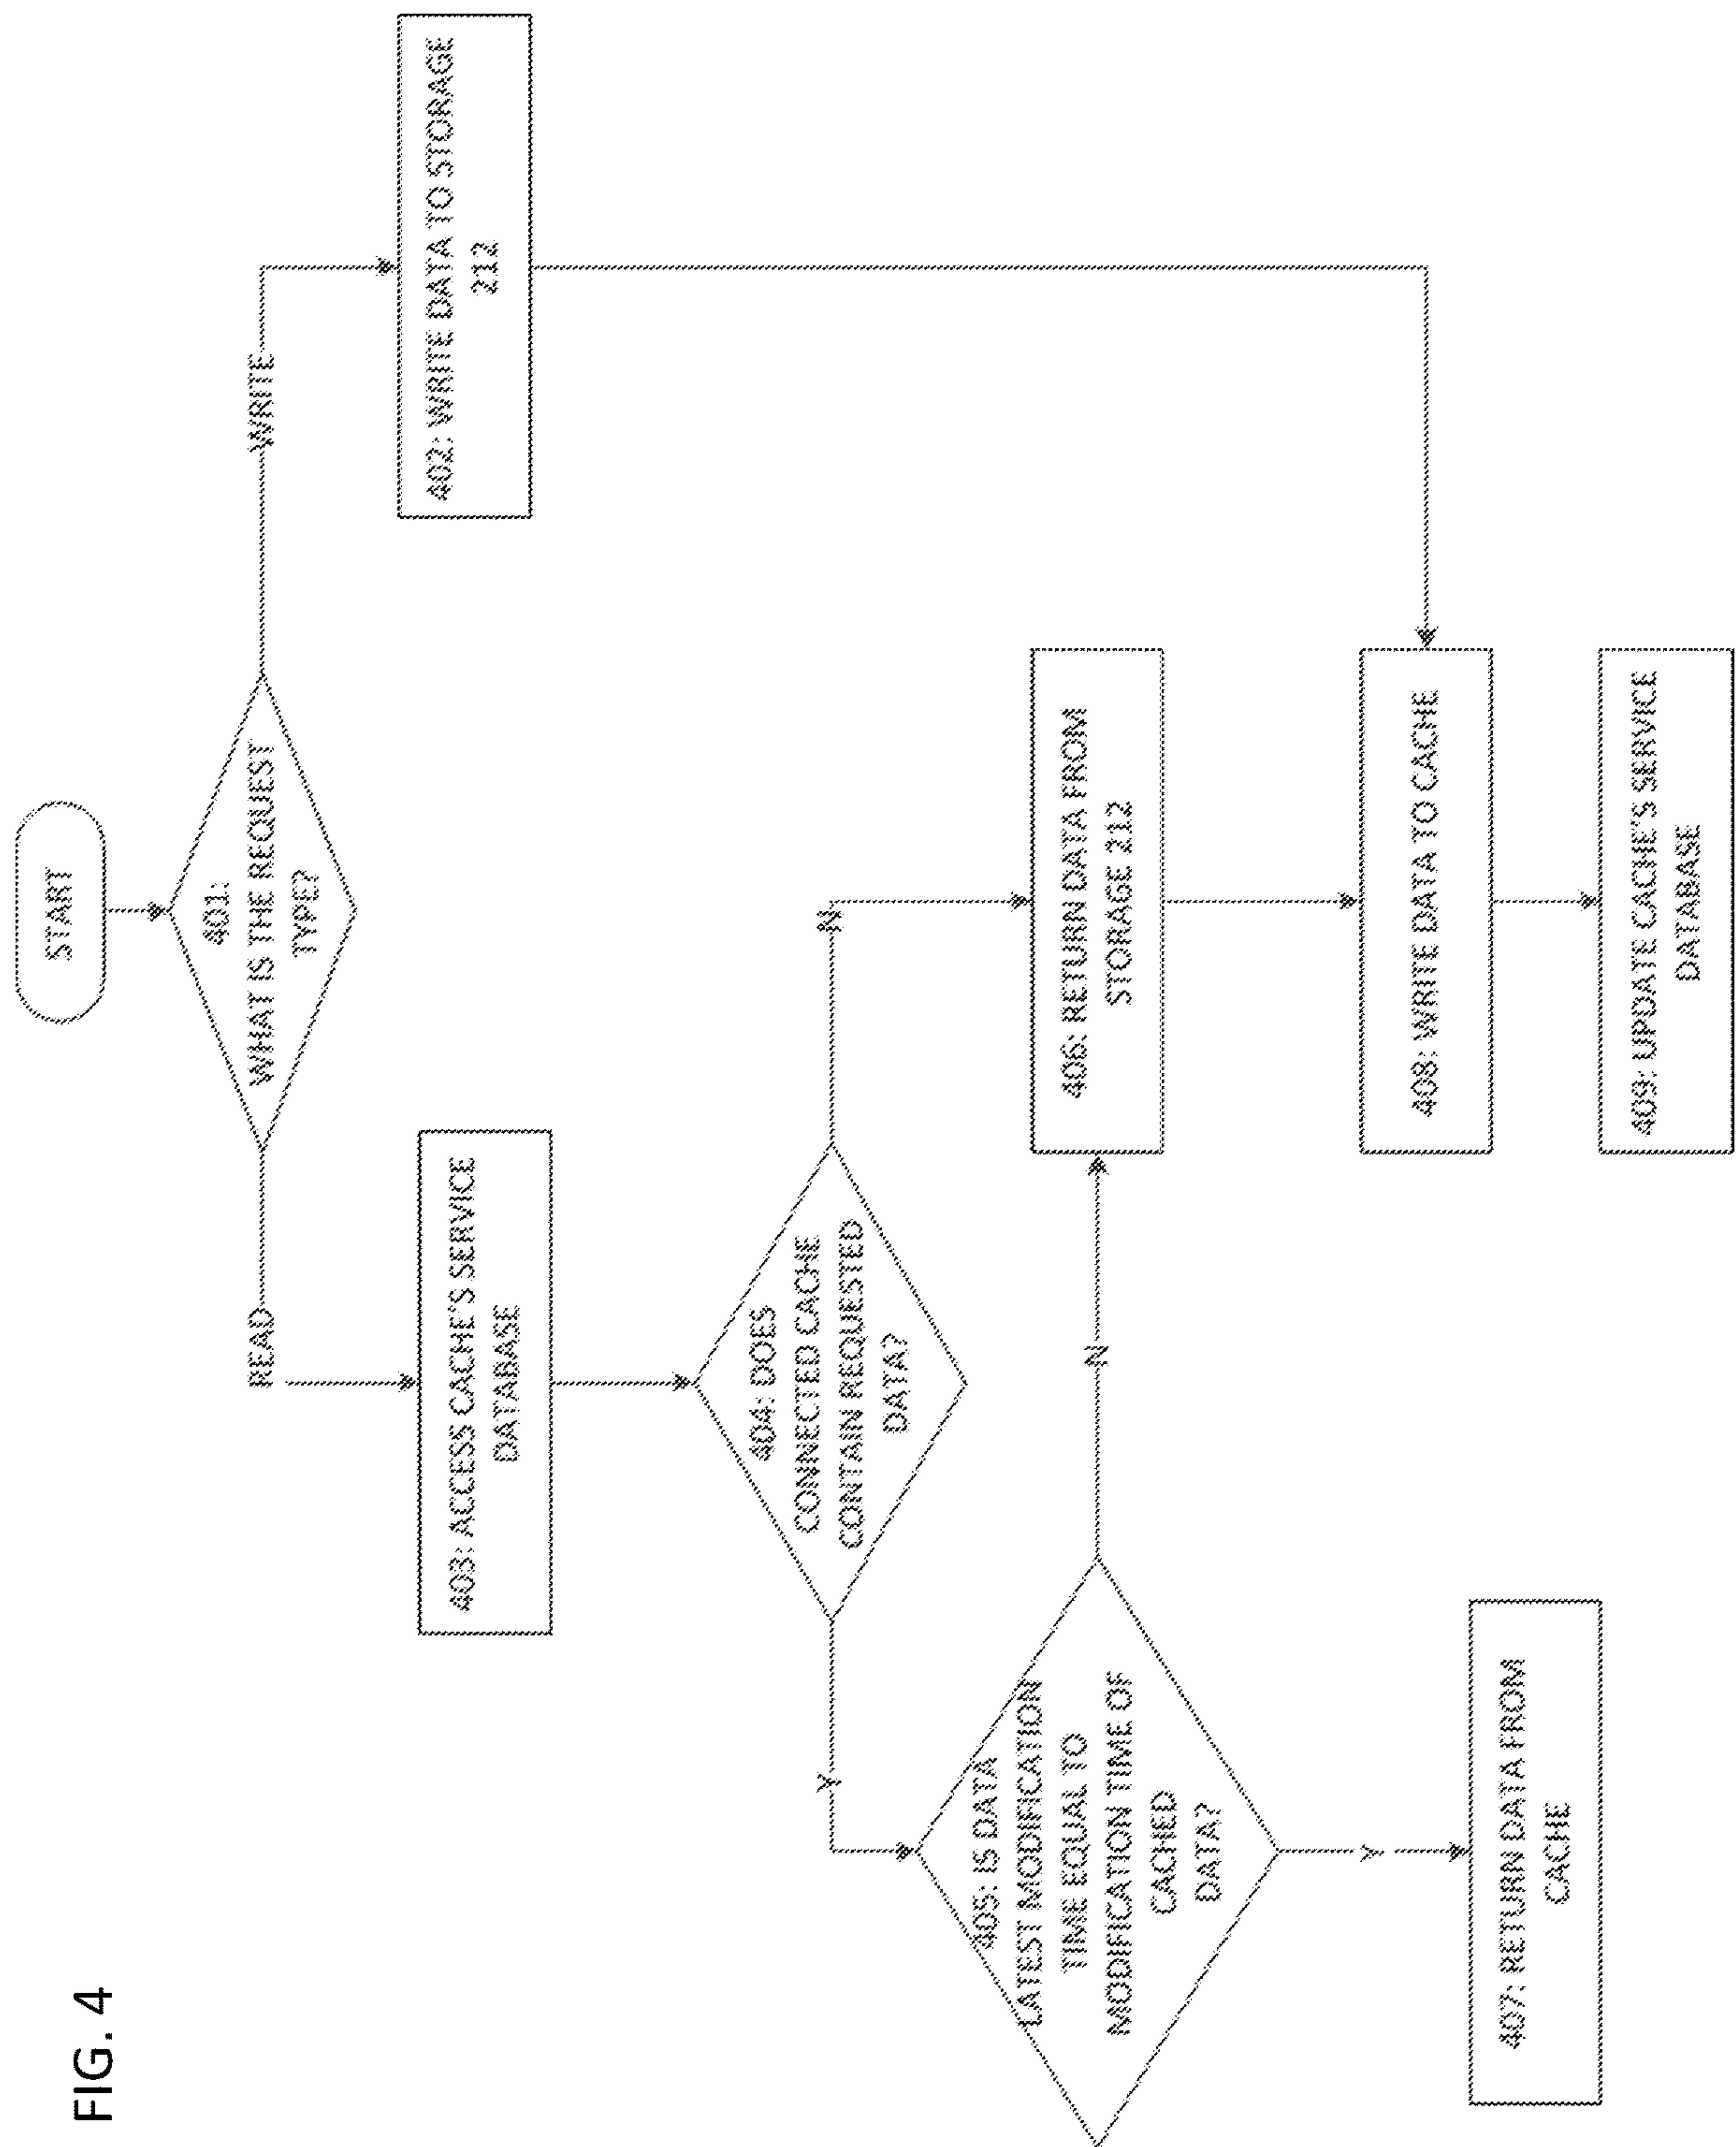


FIG. 4B

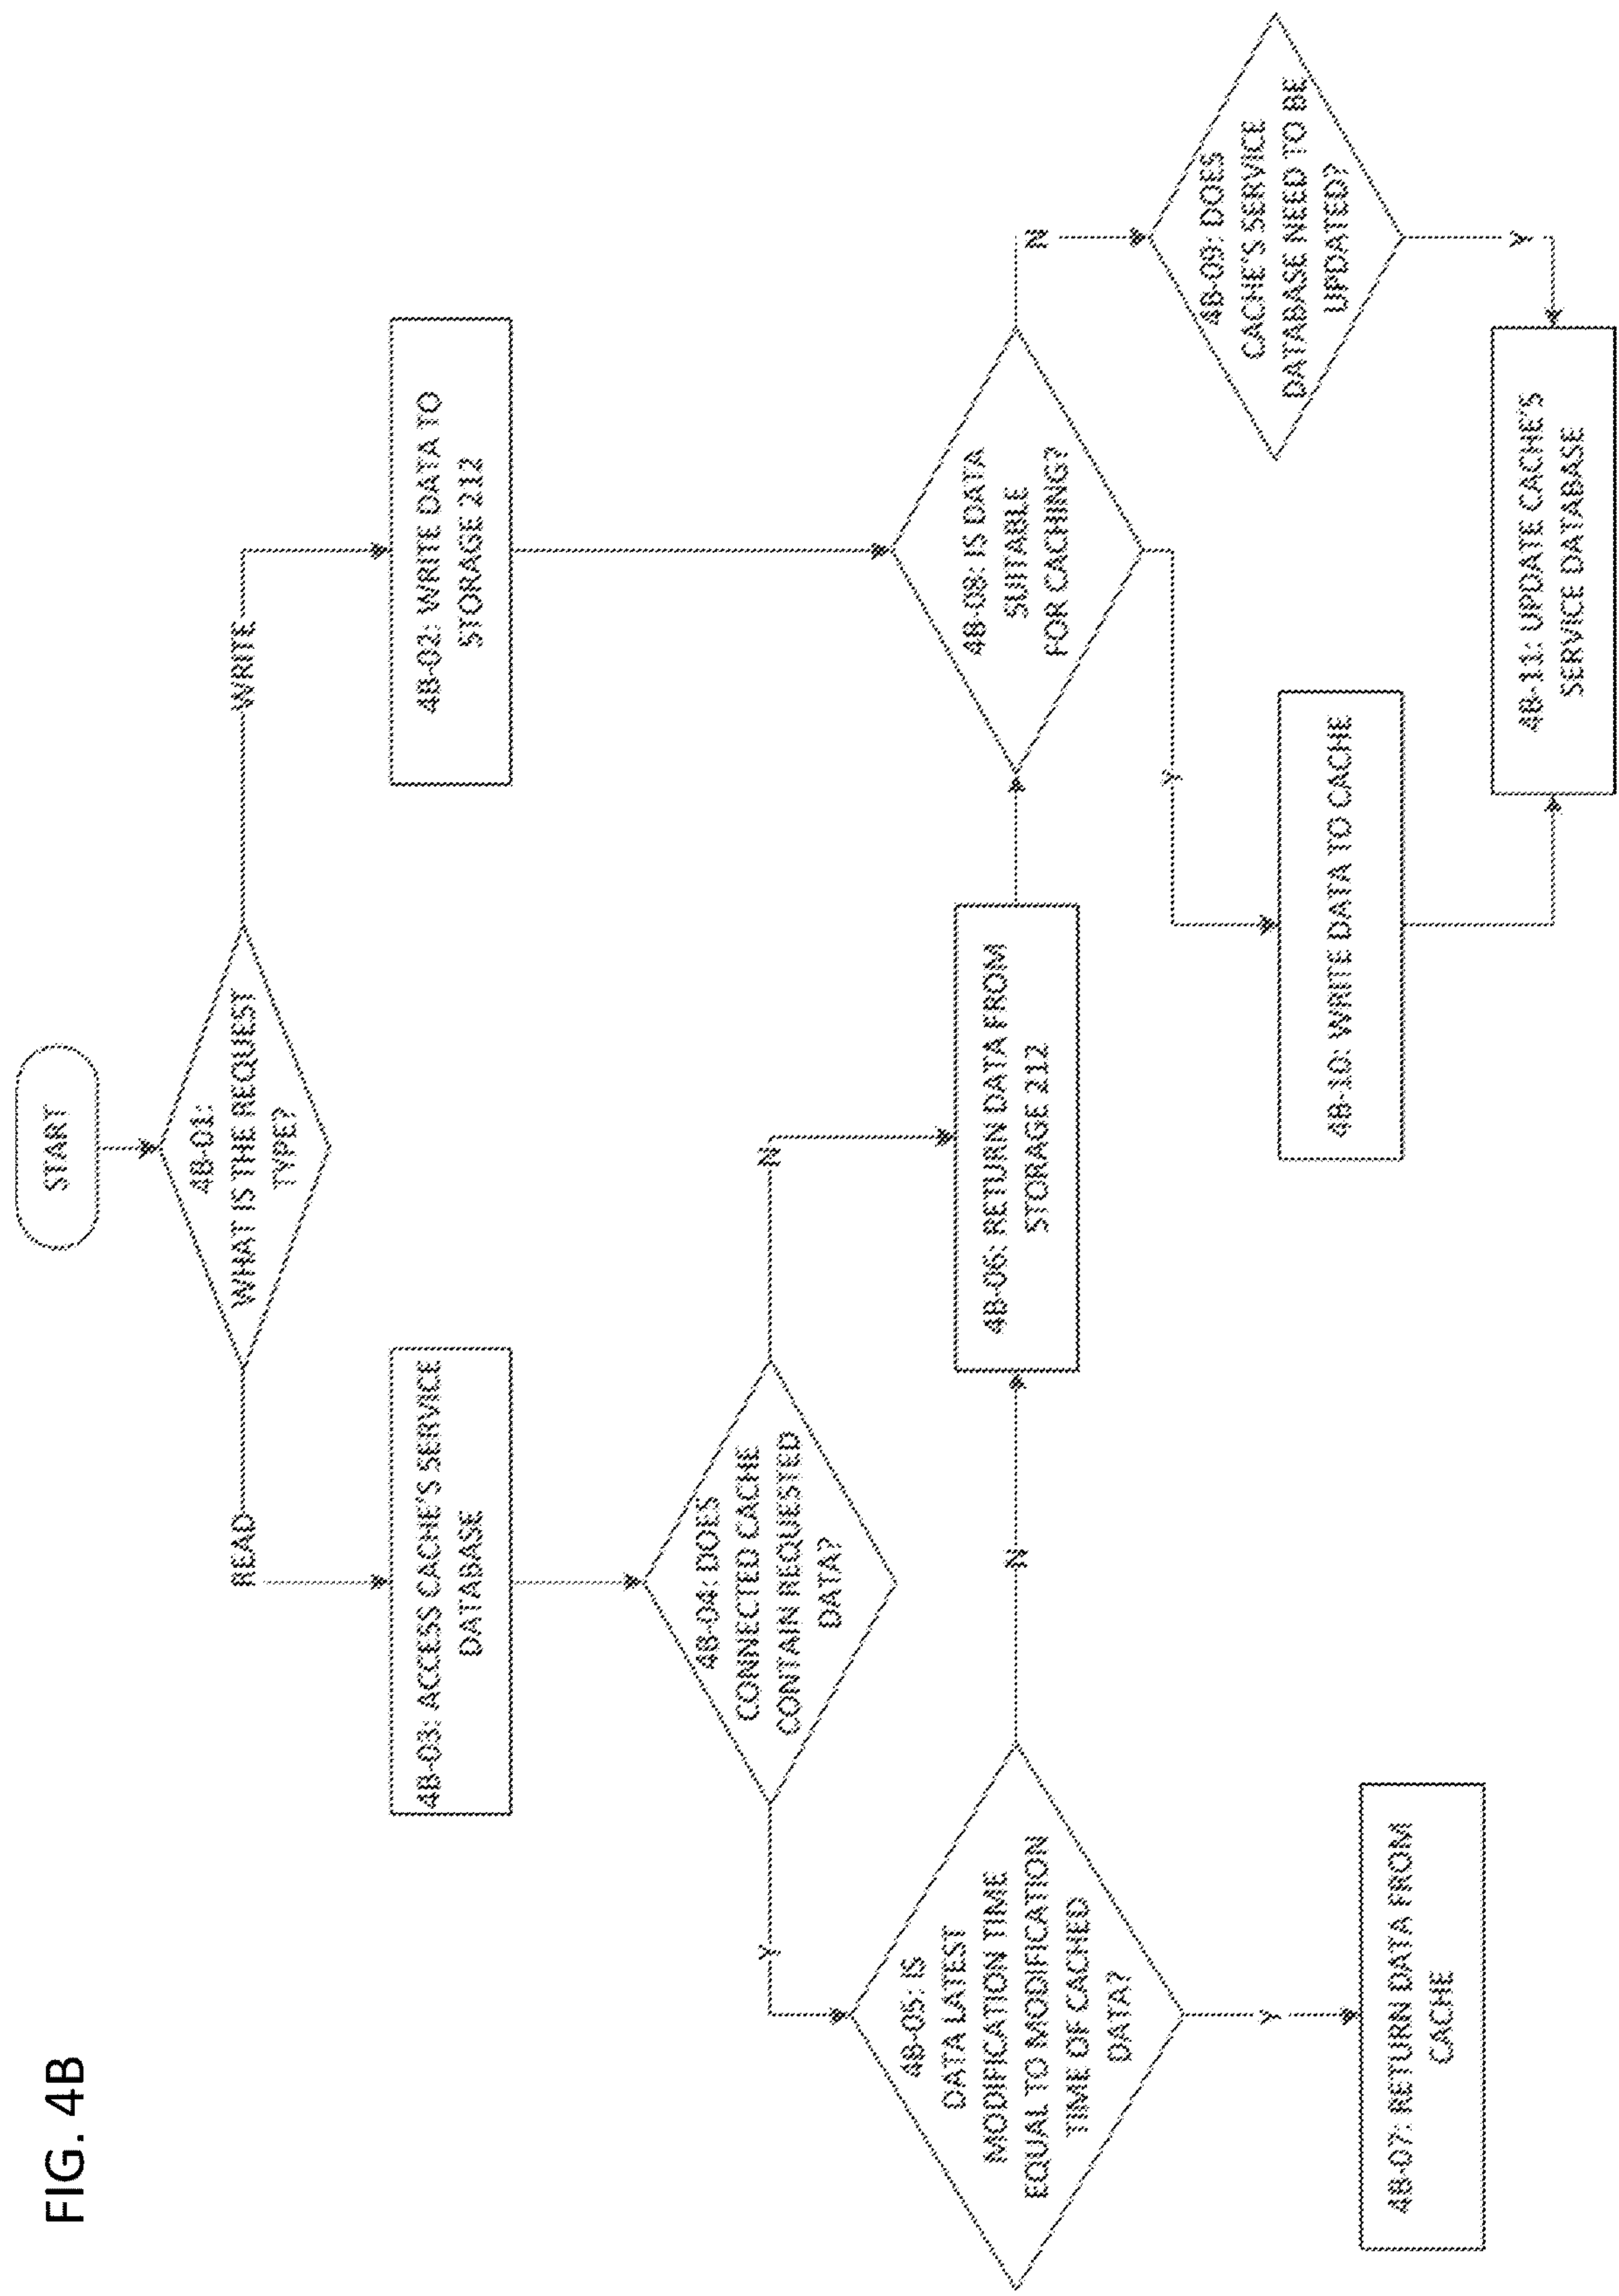


FIG. 4C

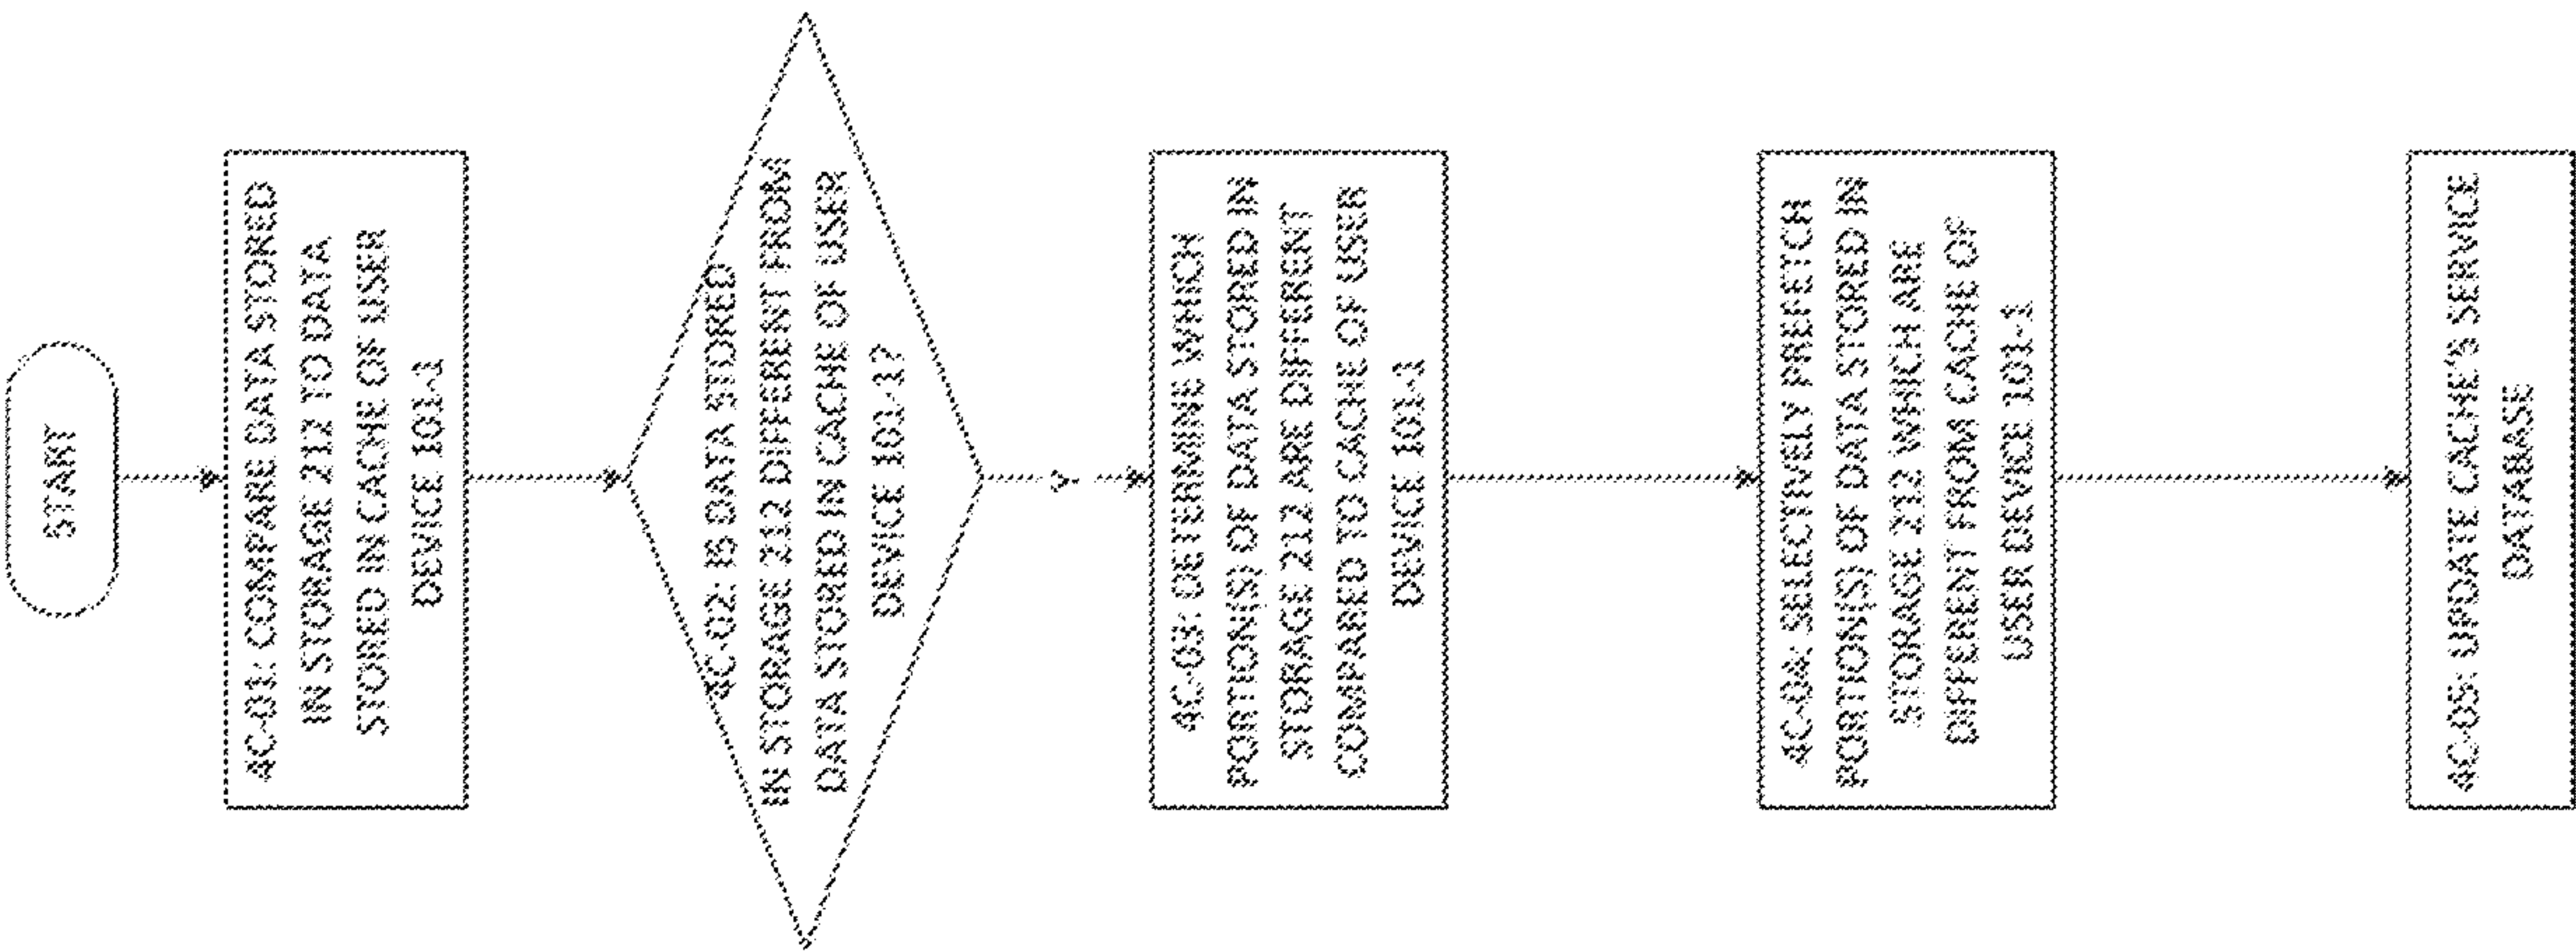


FIG. 5

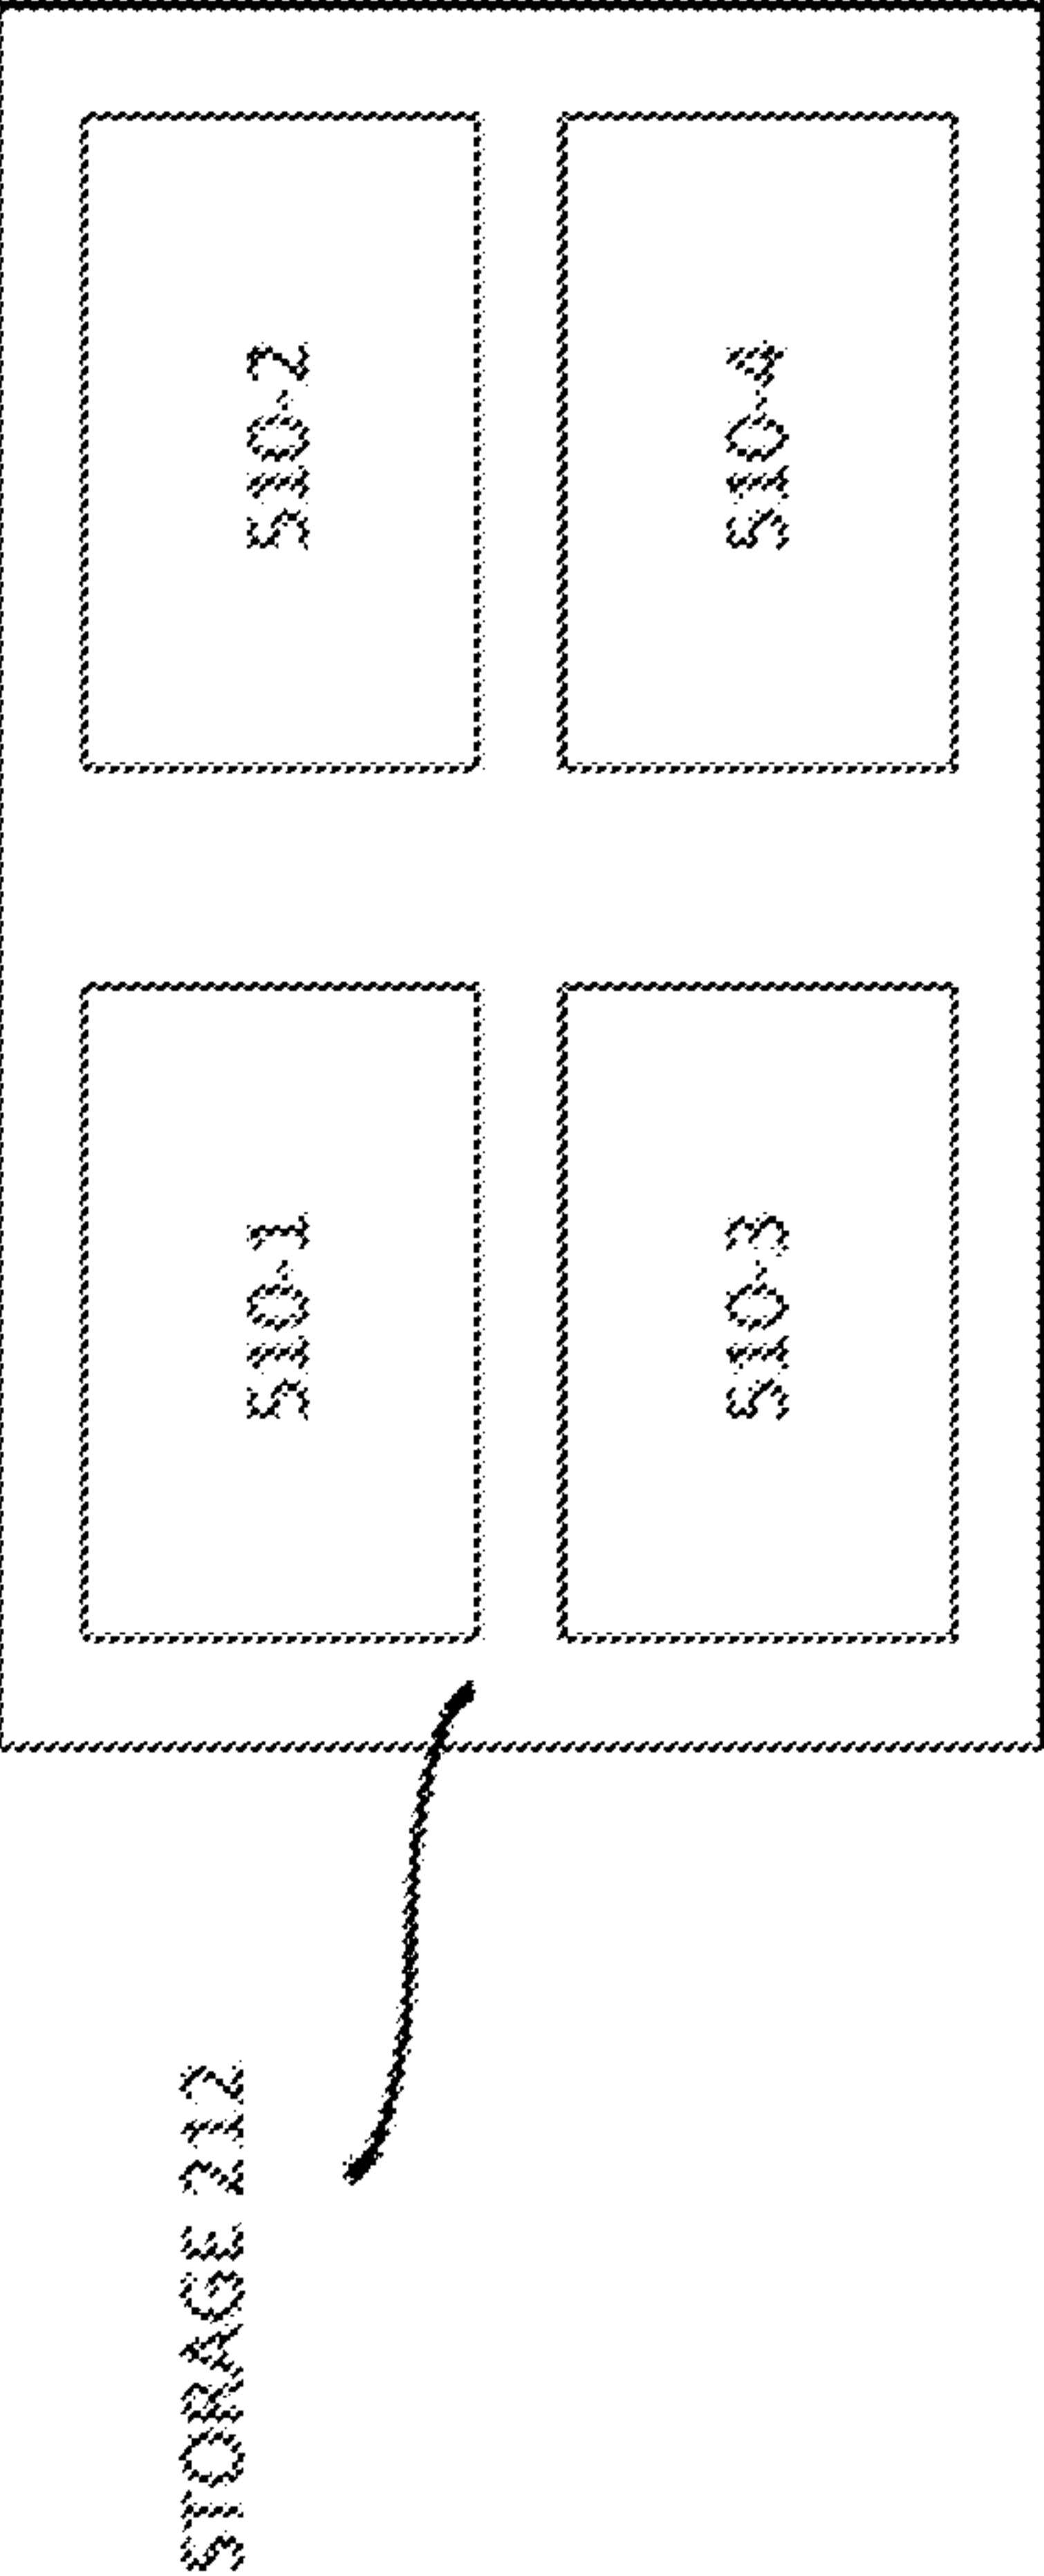


FIG. 6

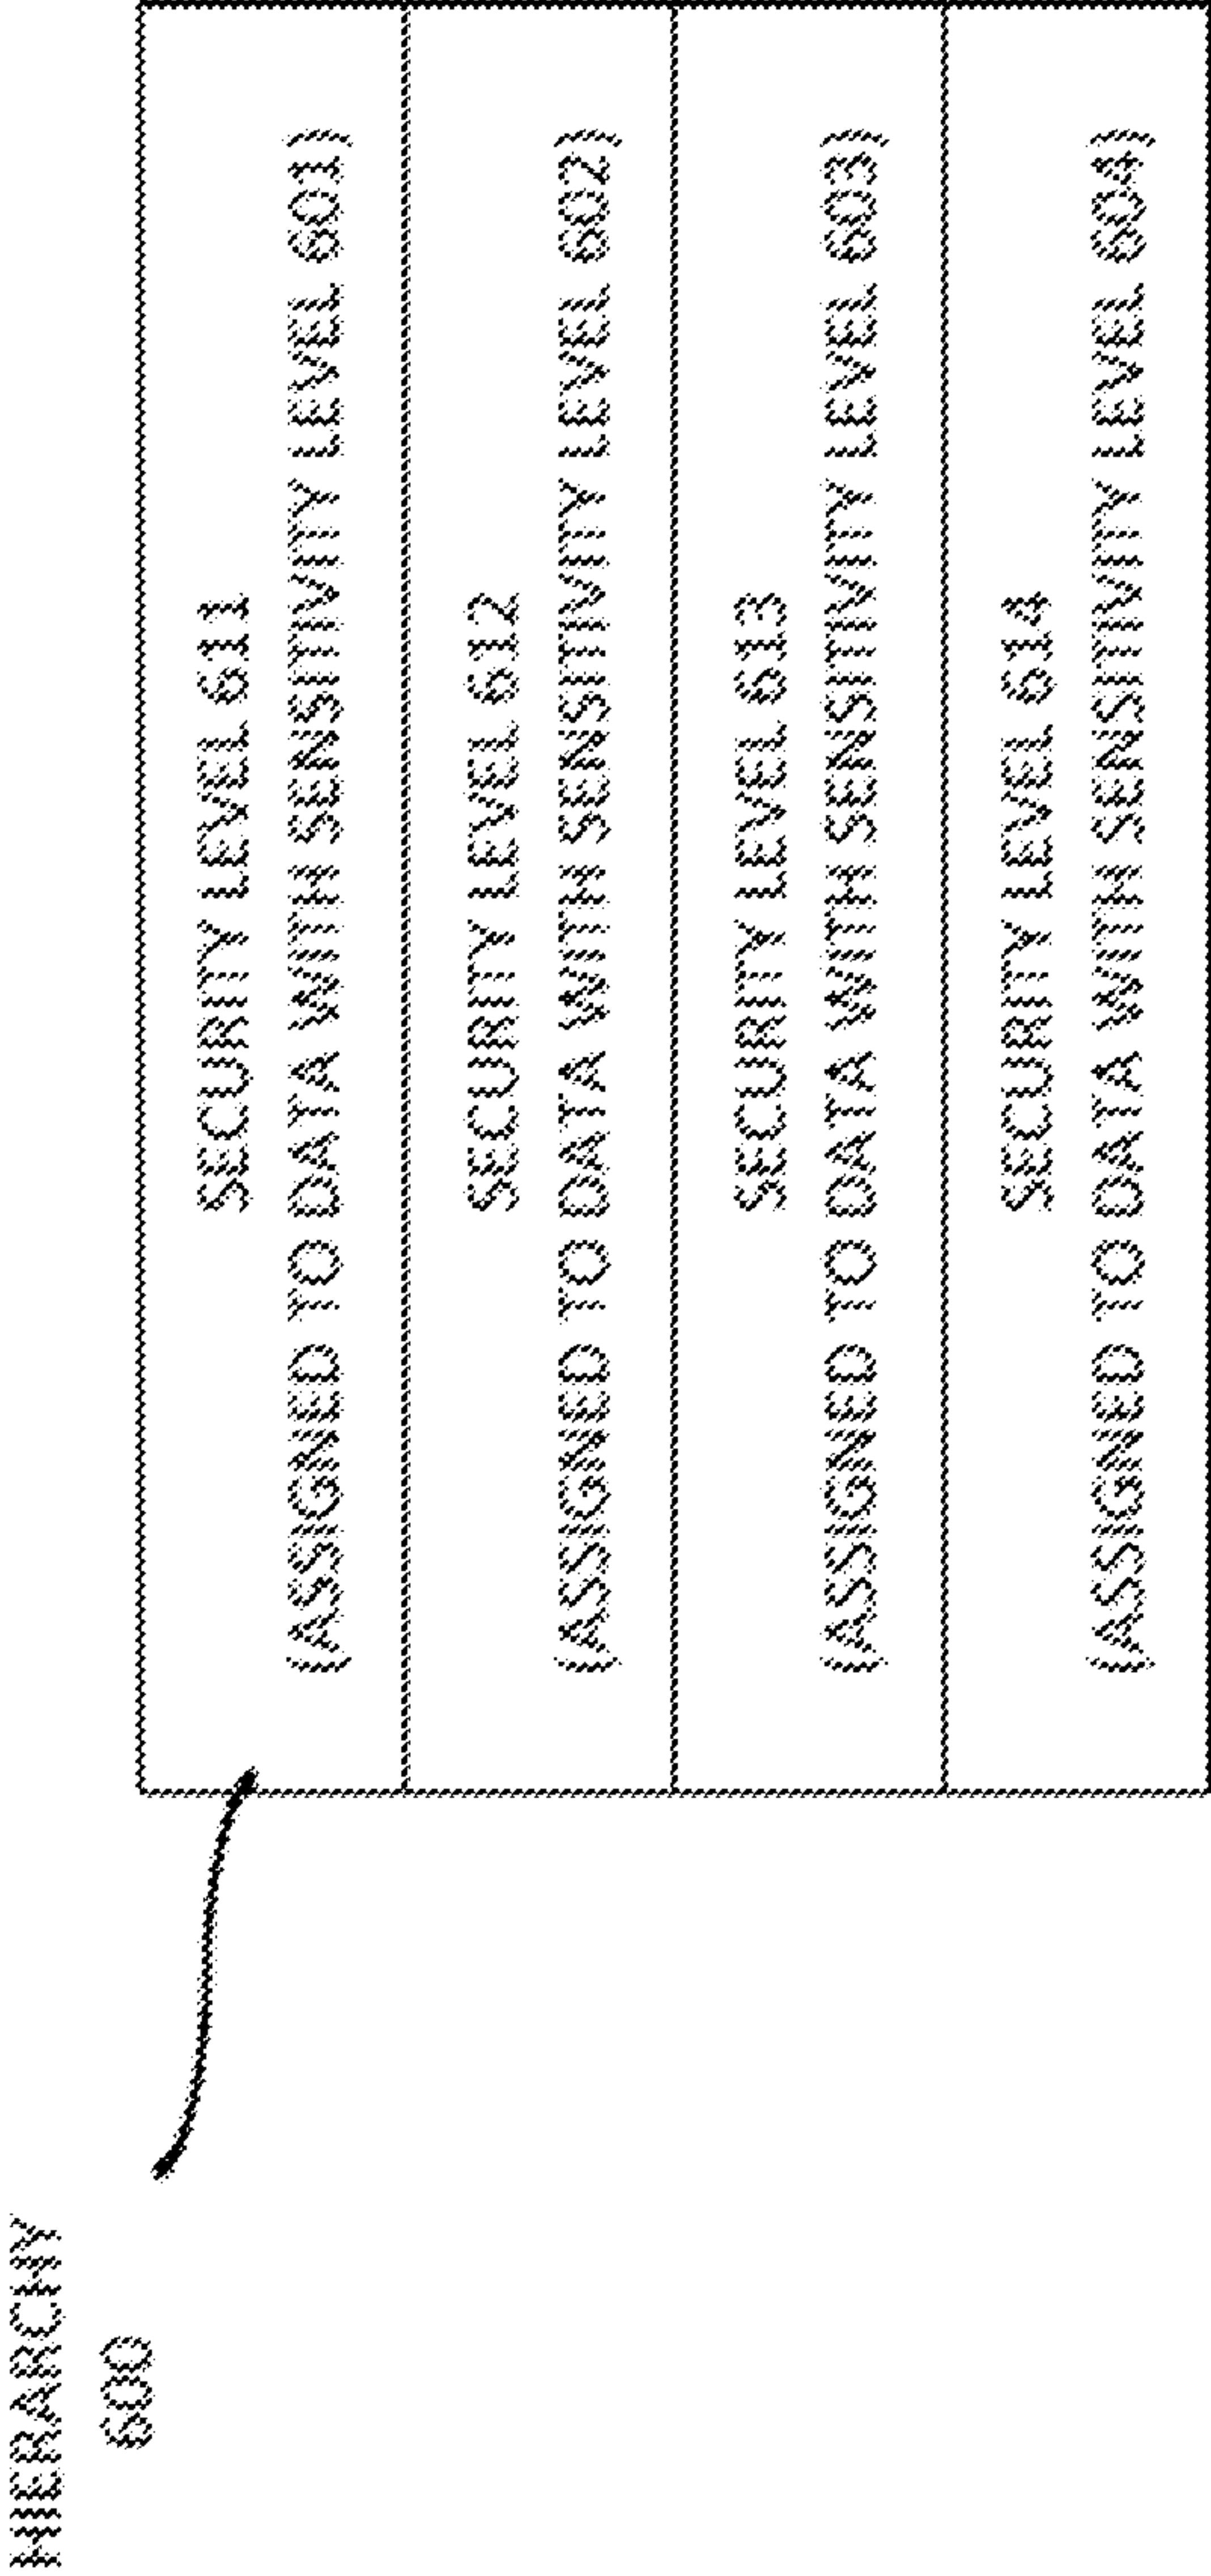


FIG. 7A

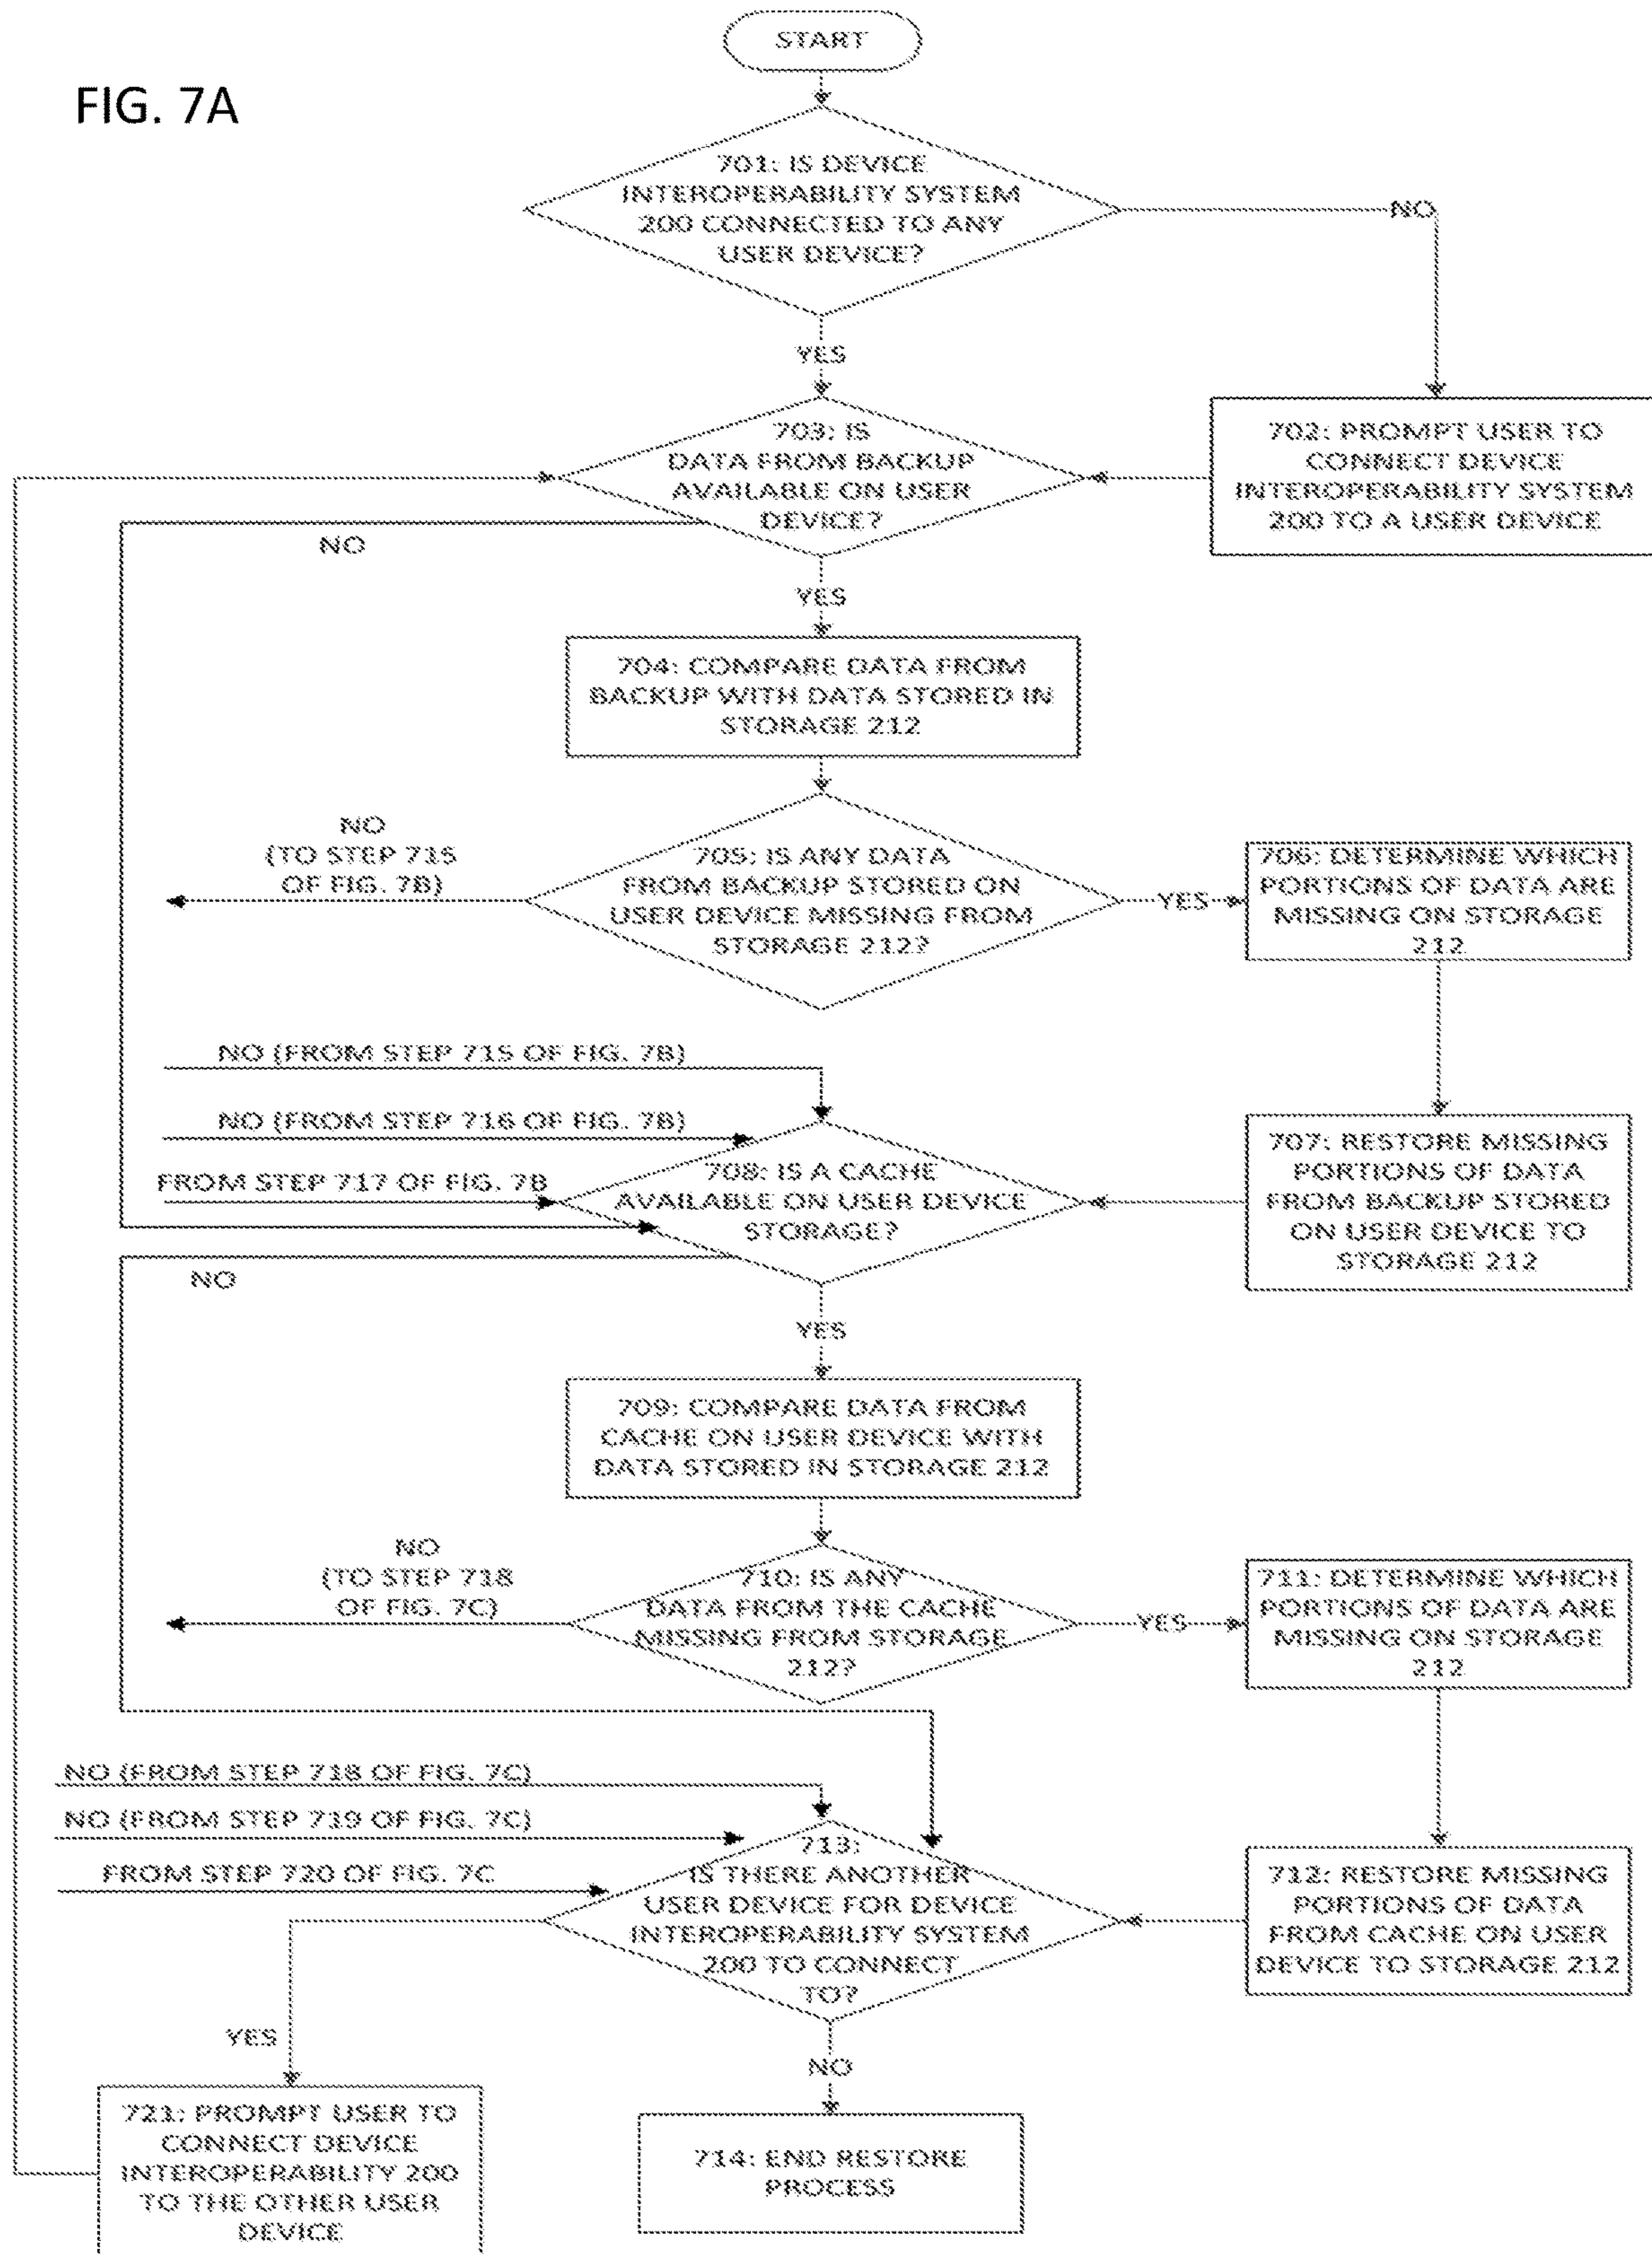


FIG. 7B

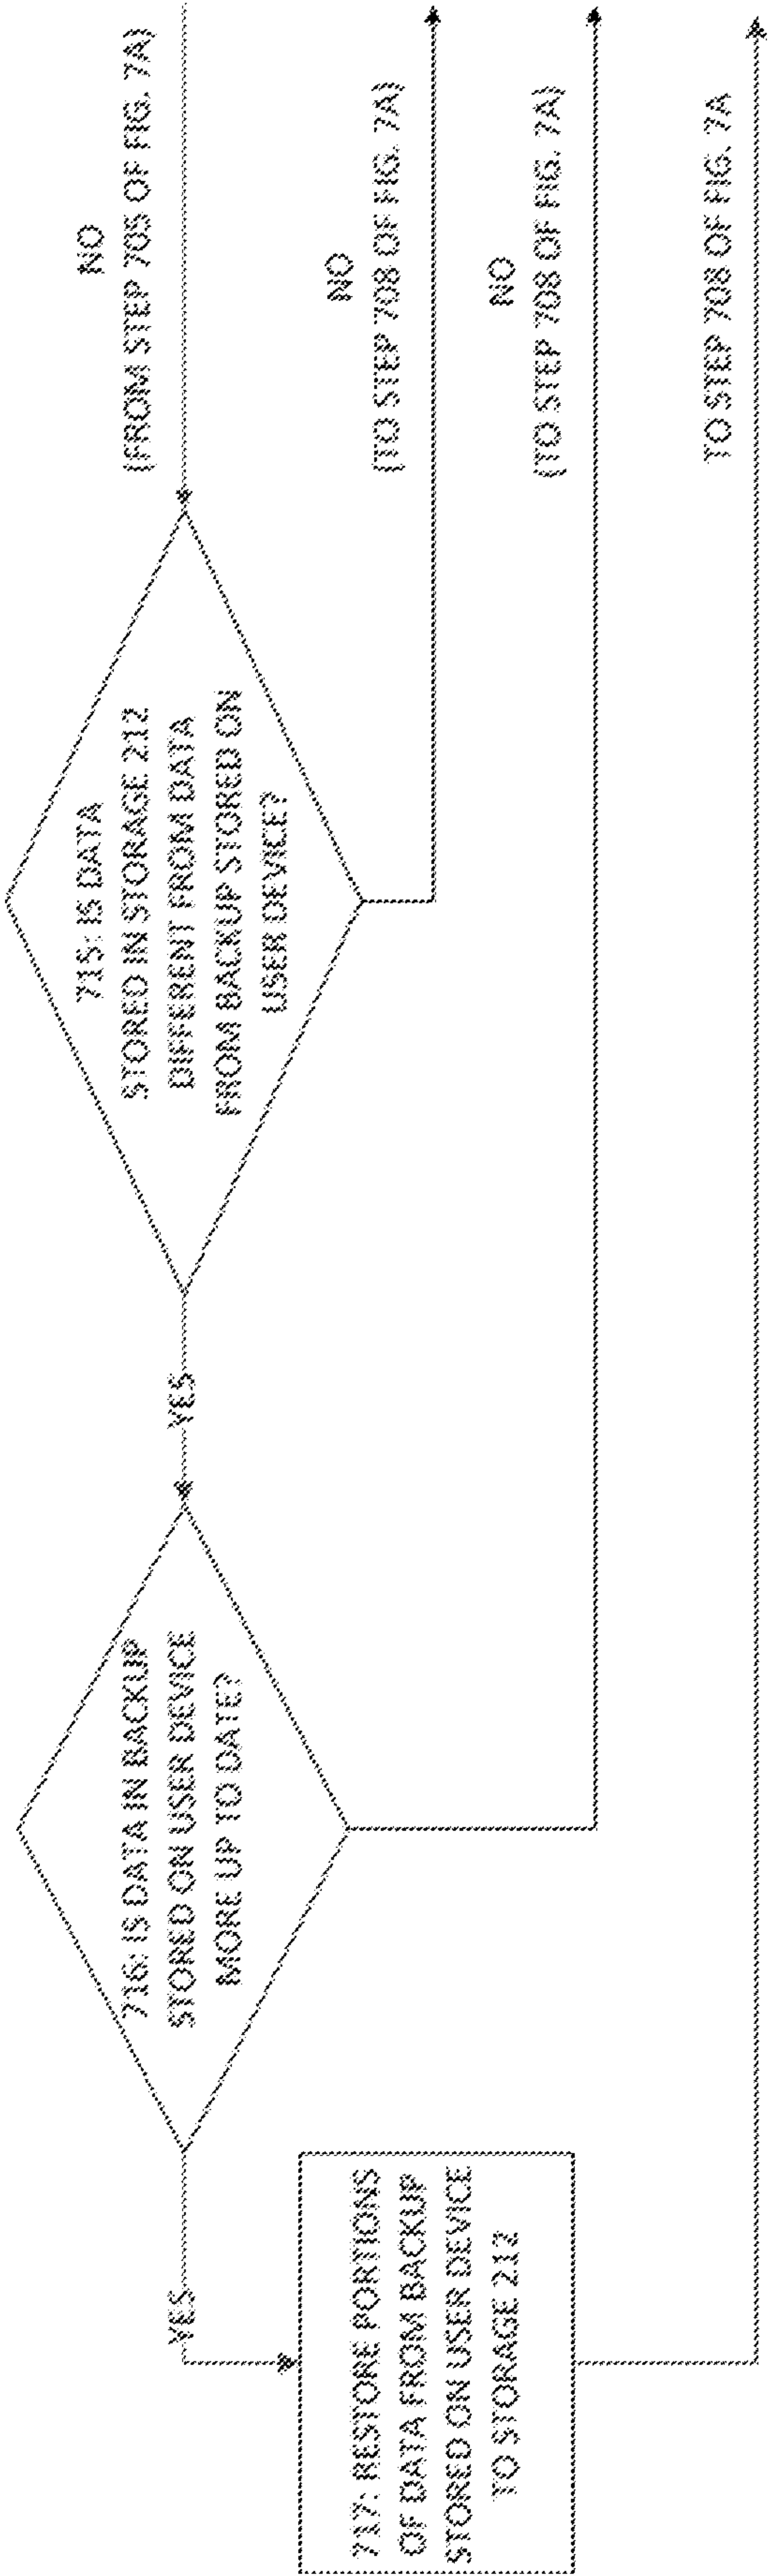


FIG. 7C

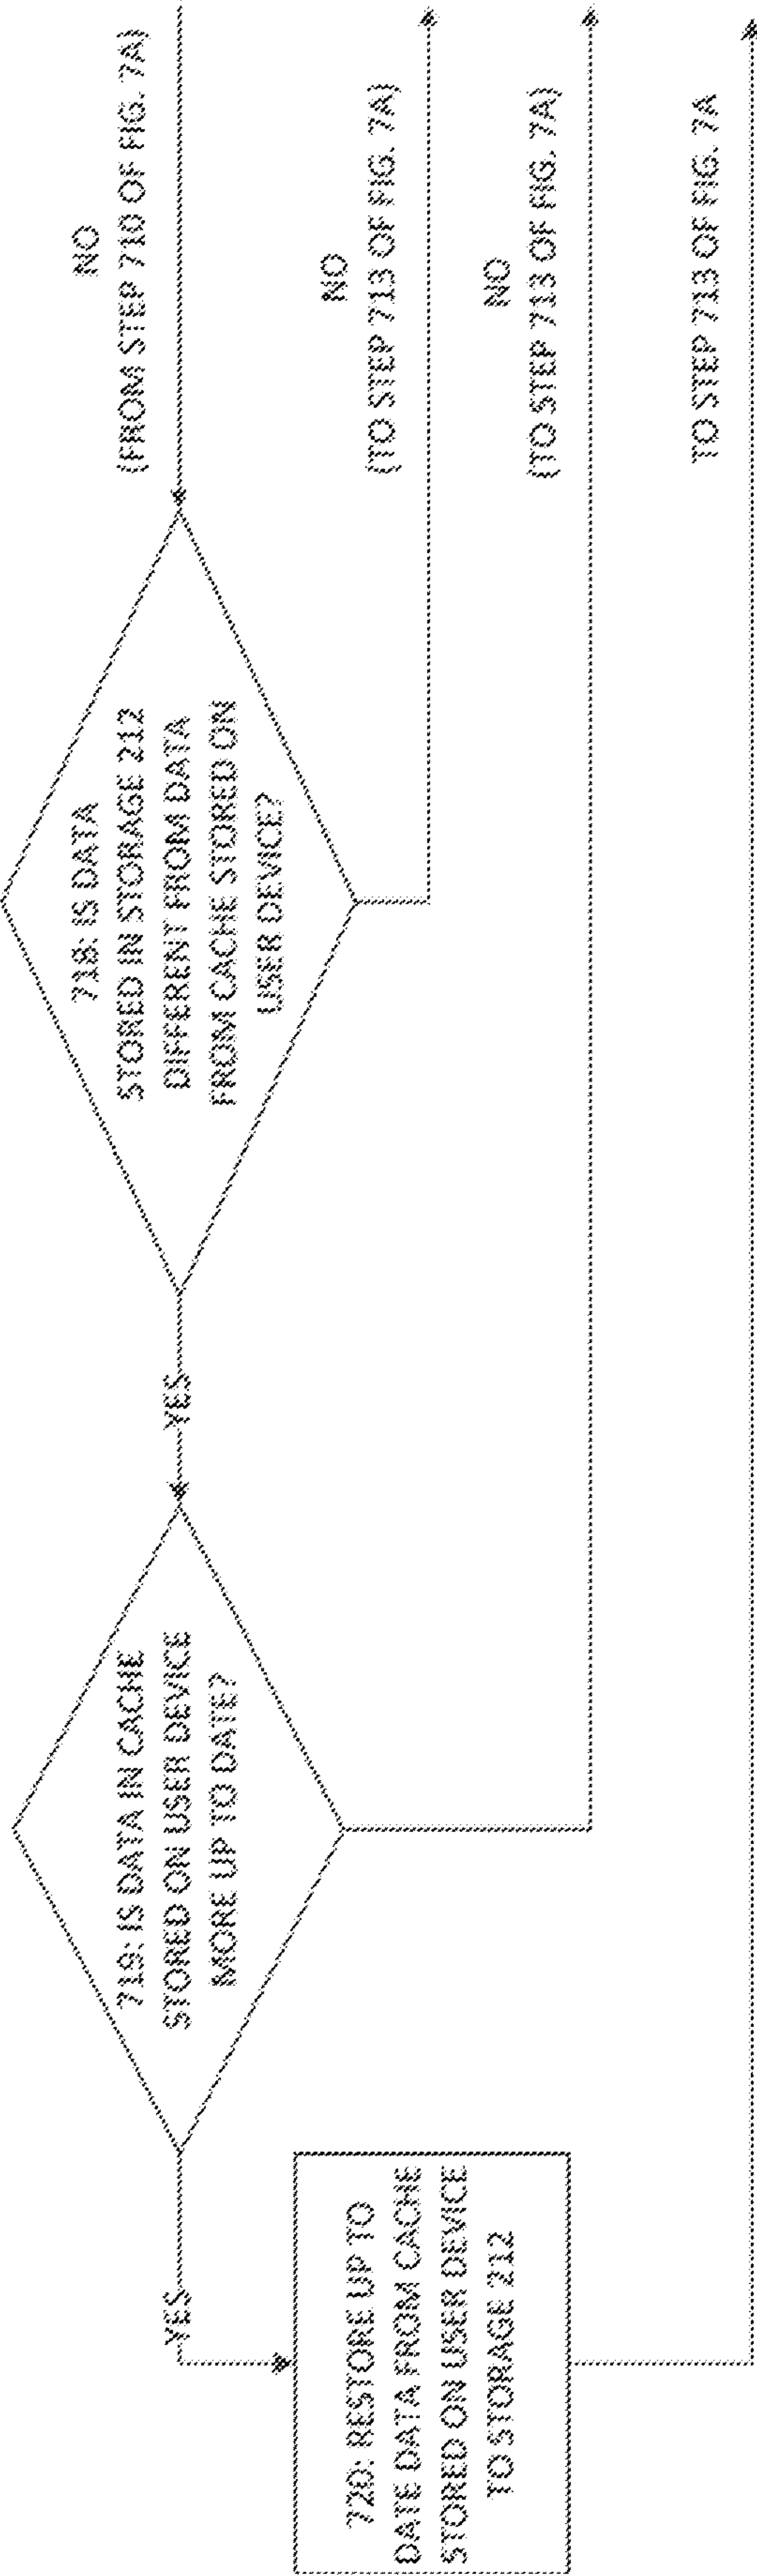


FIG. 8A

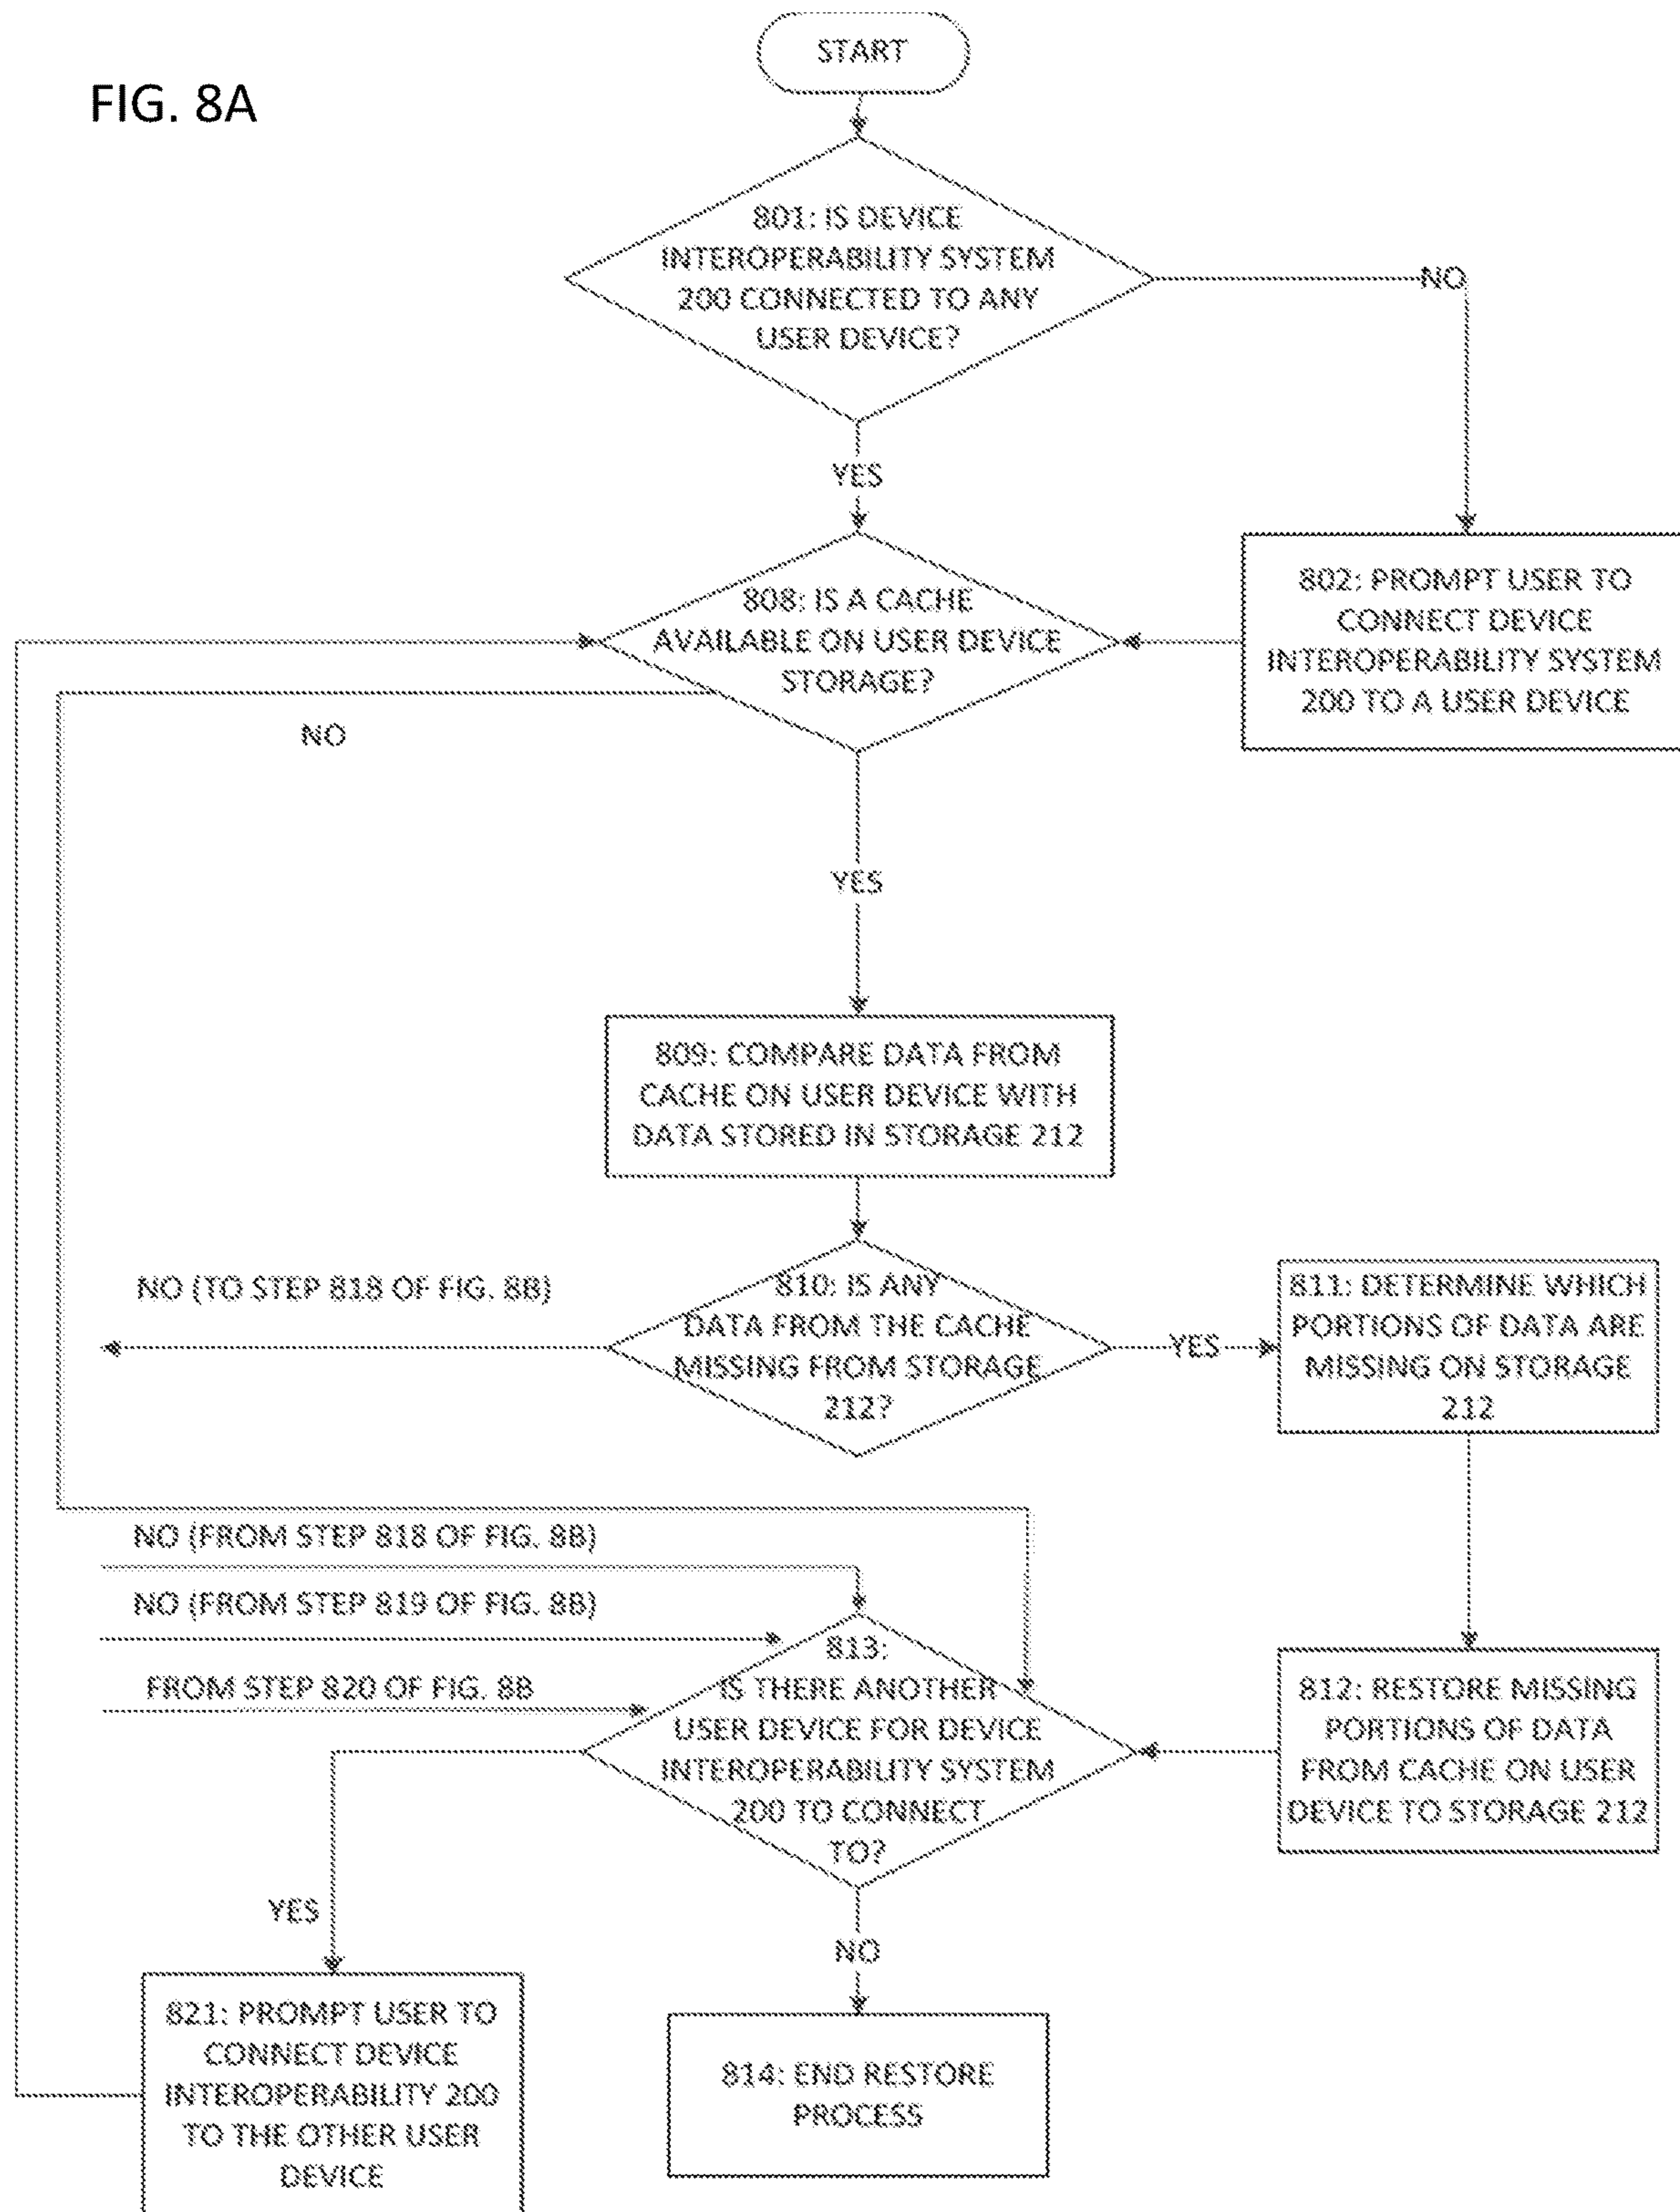


FIG. 8B

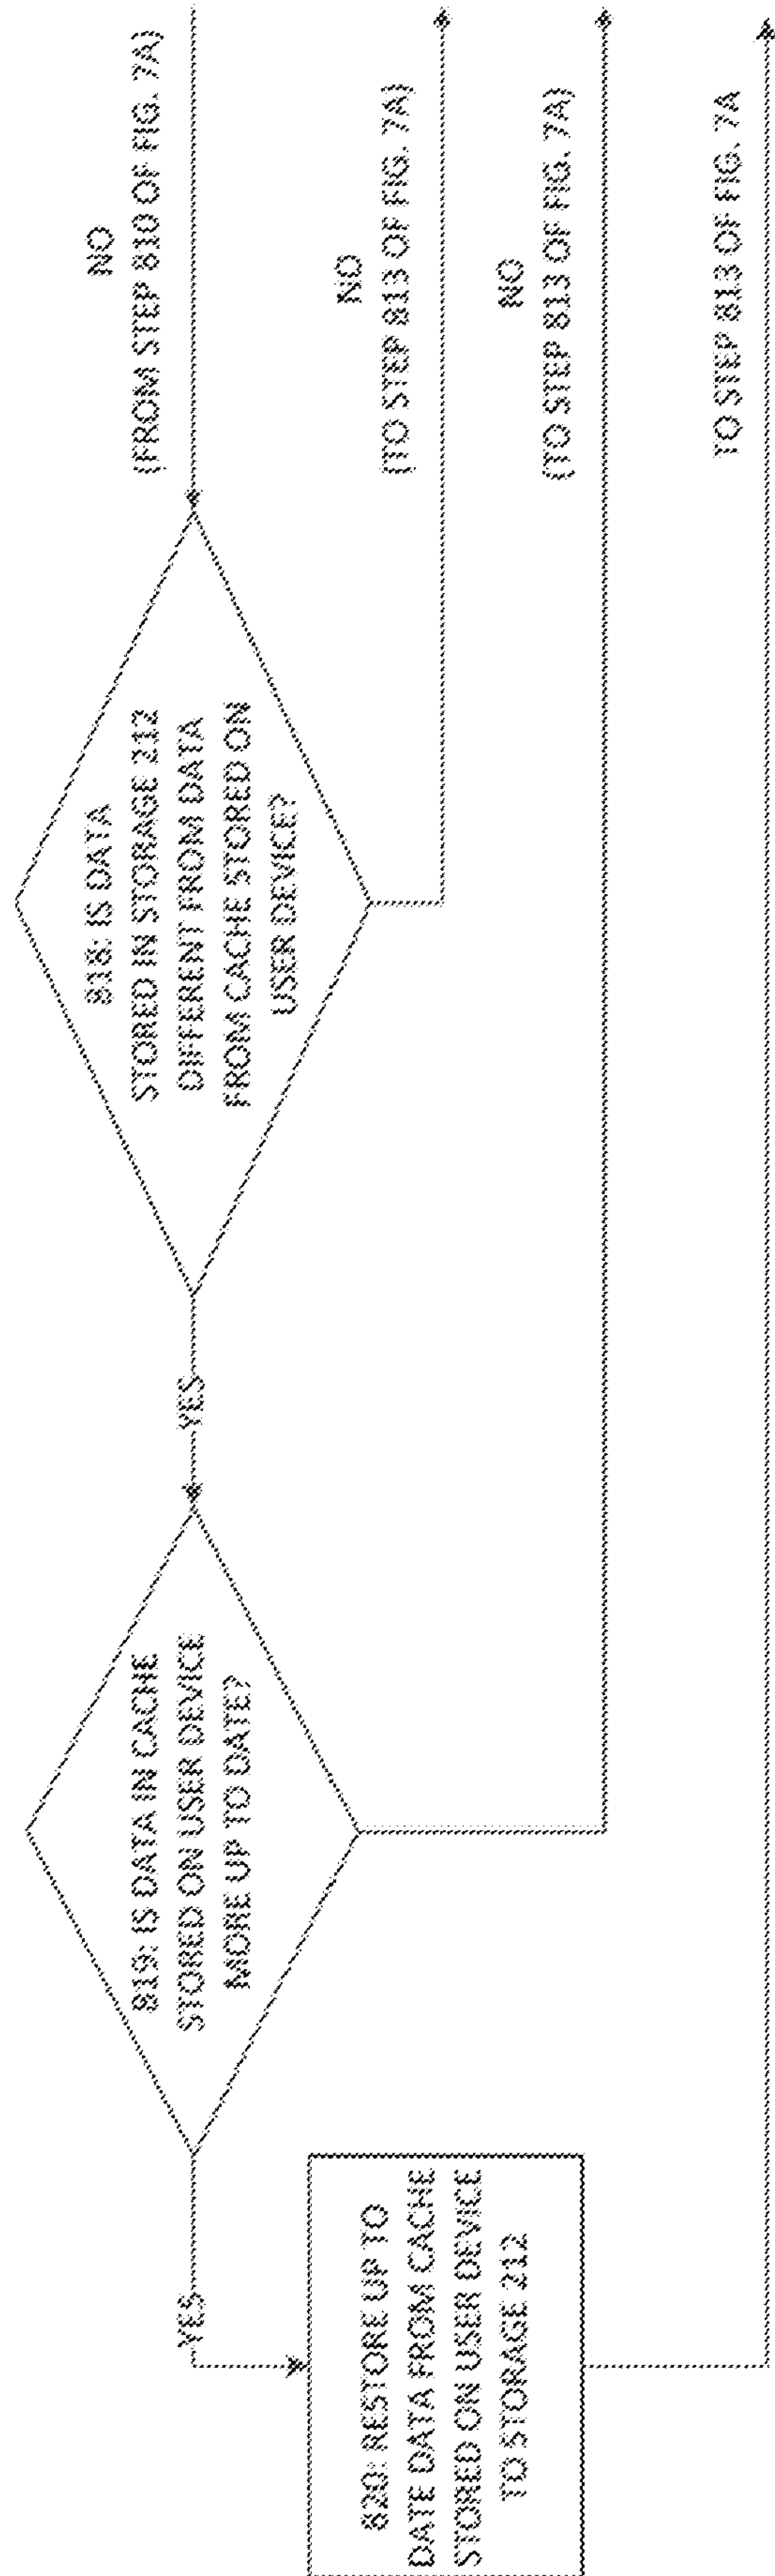


FIG. 9A

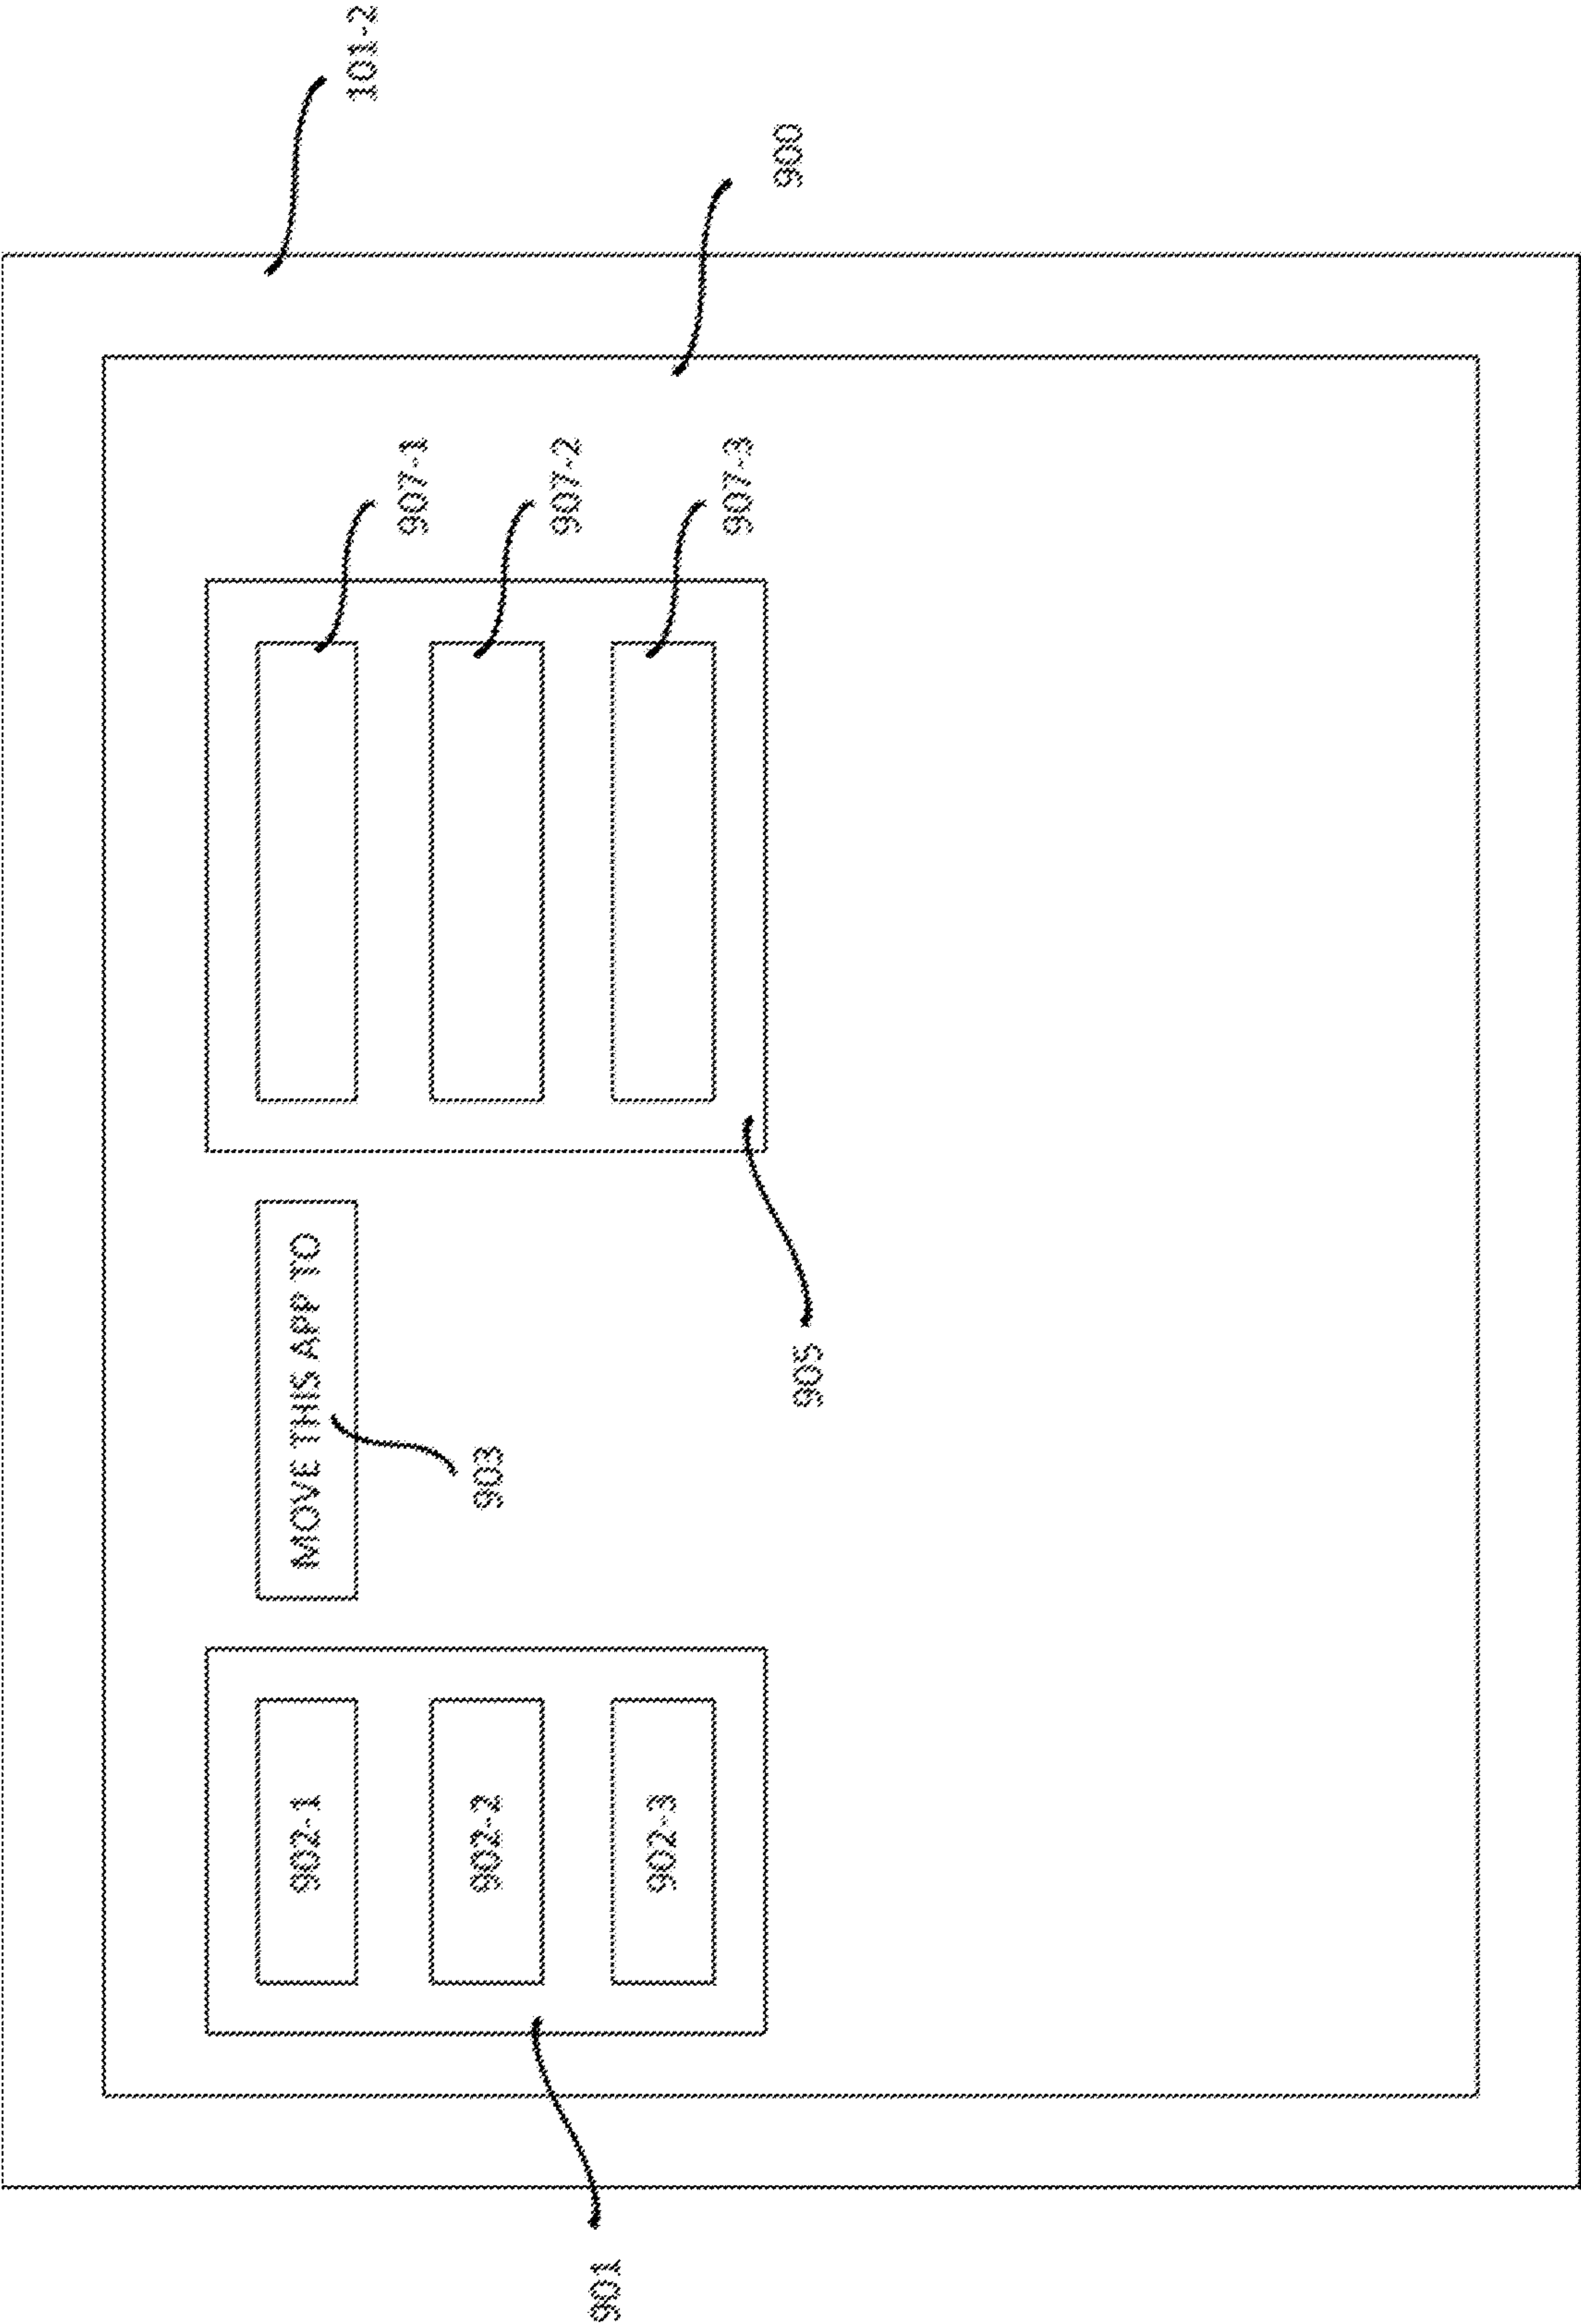


FIG. 9B

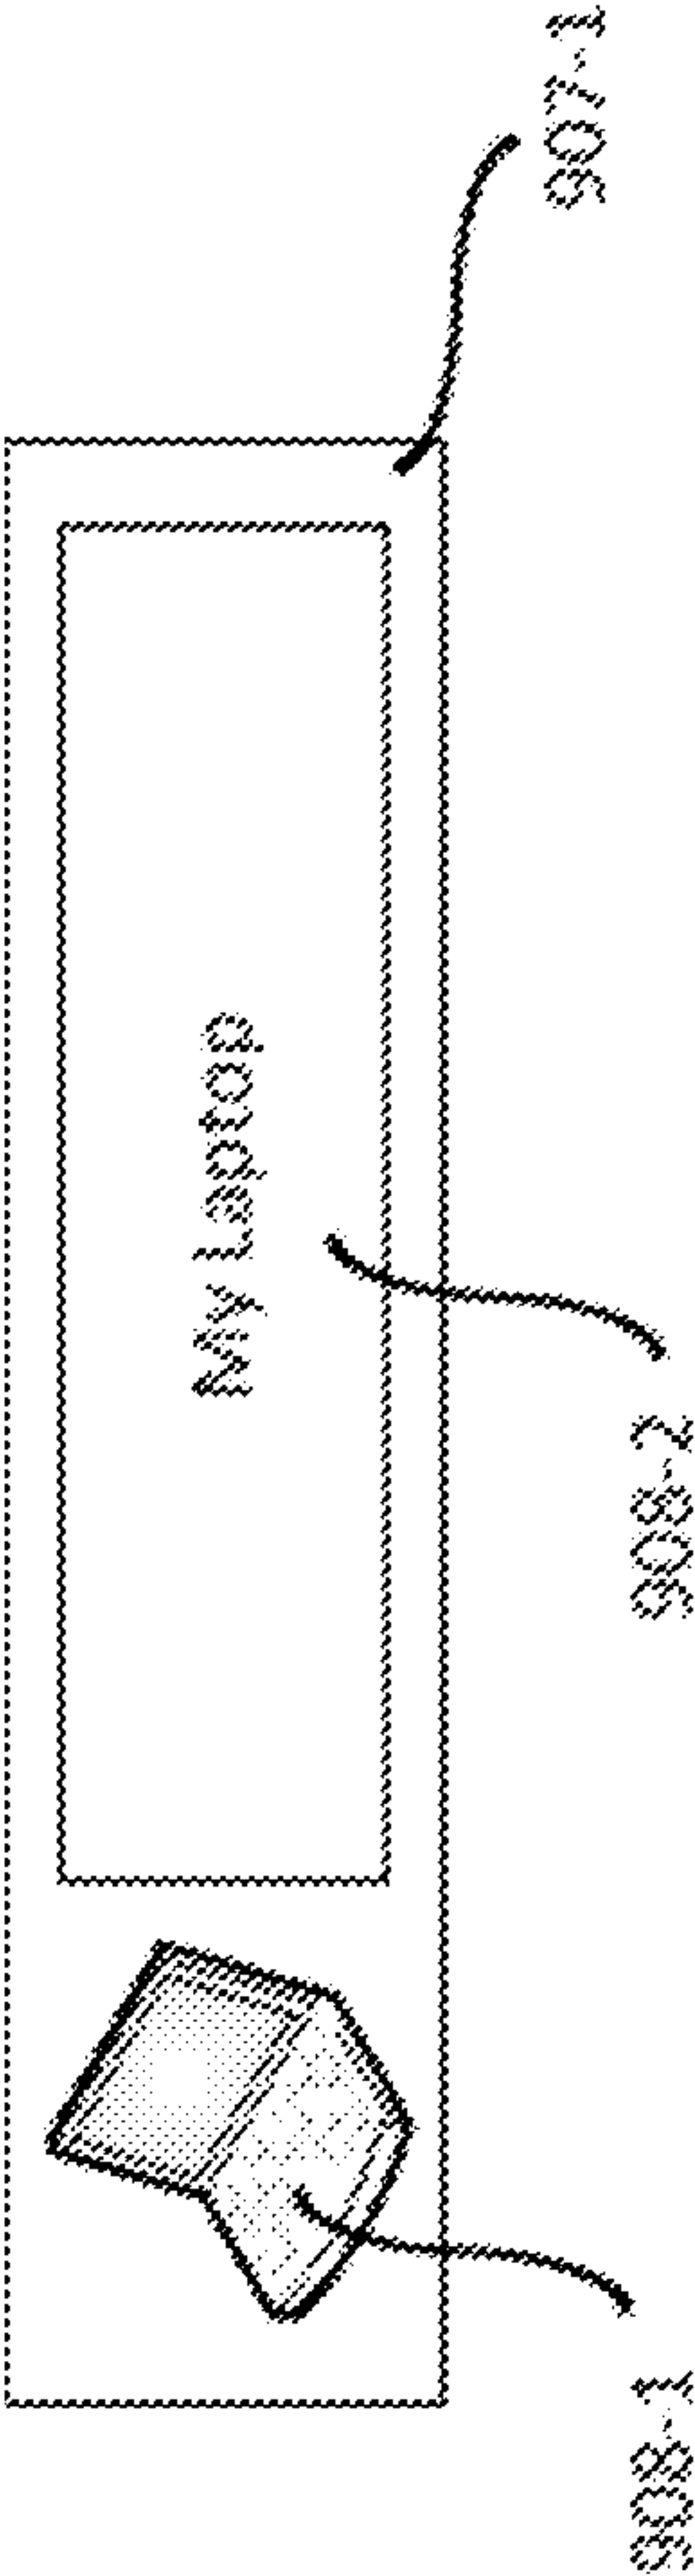


FIG. 10A


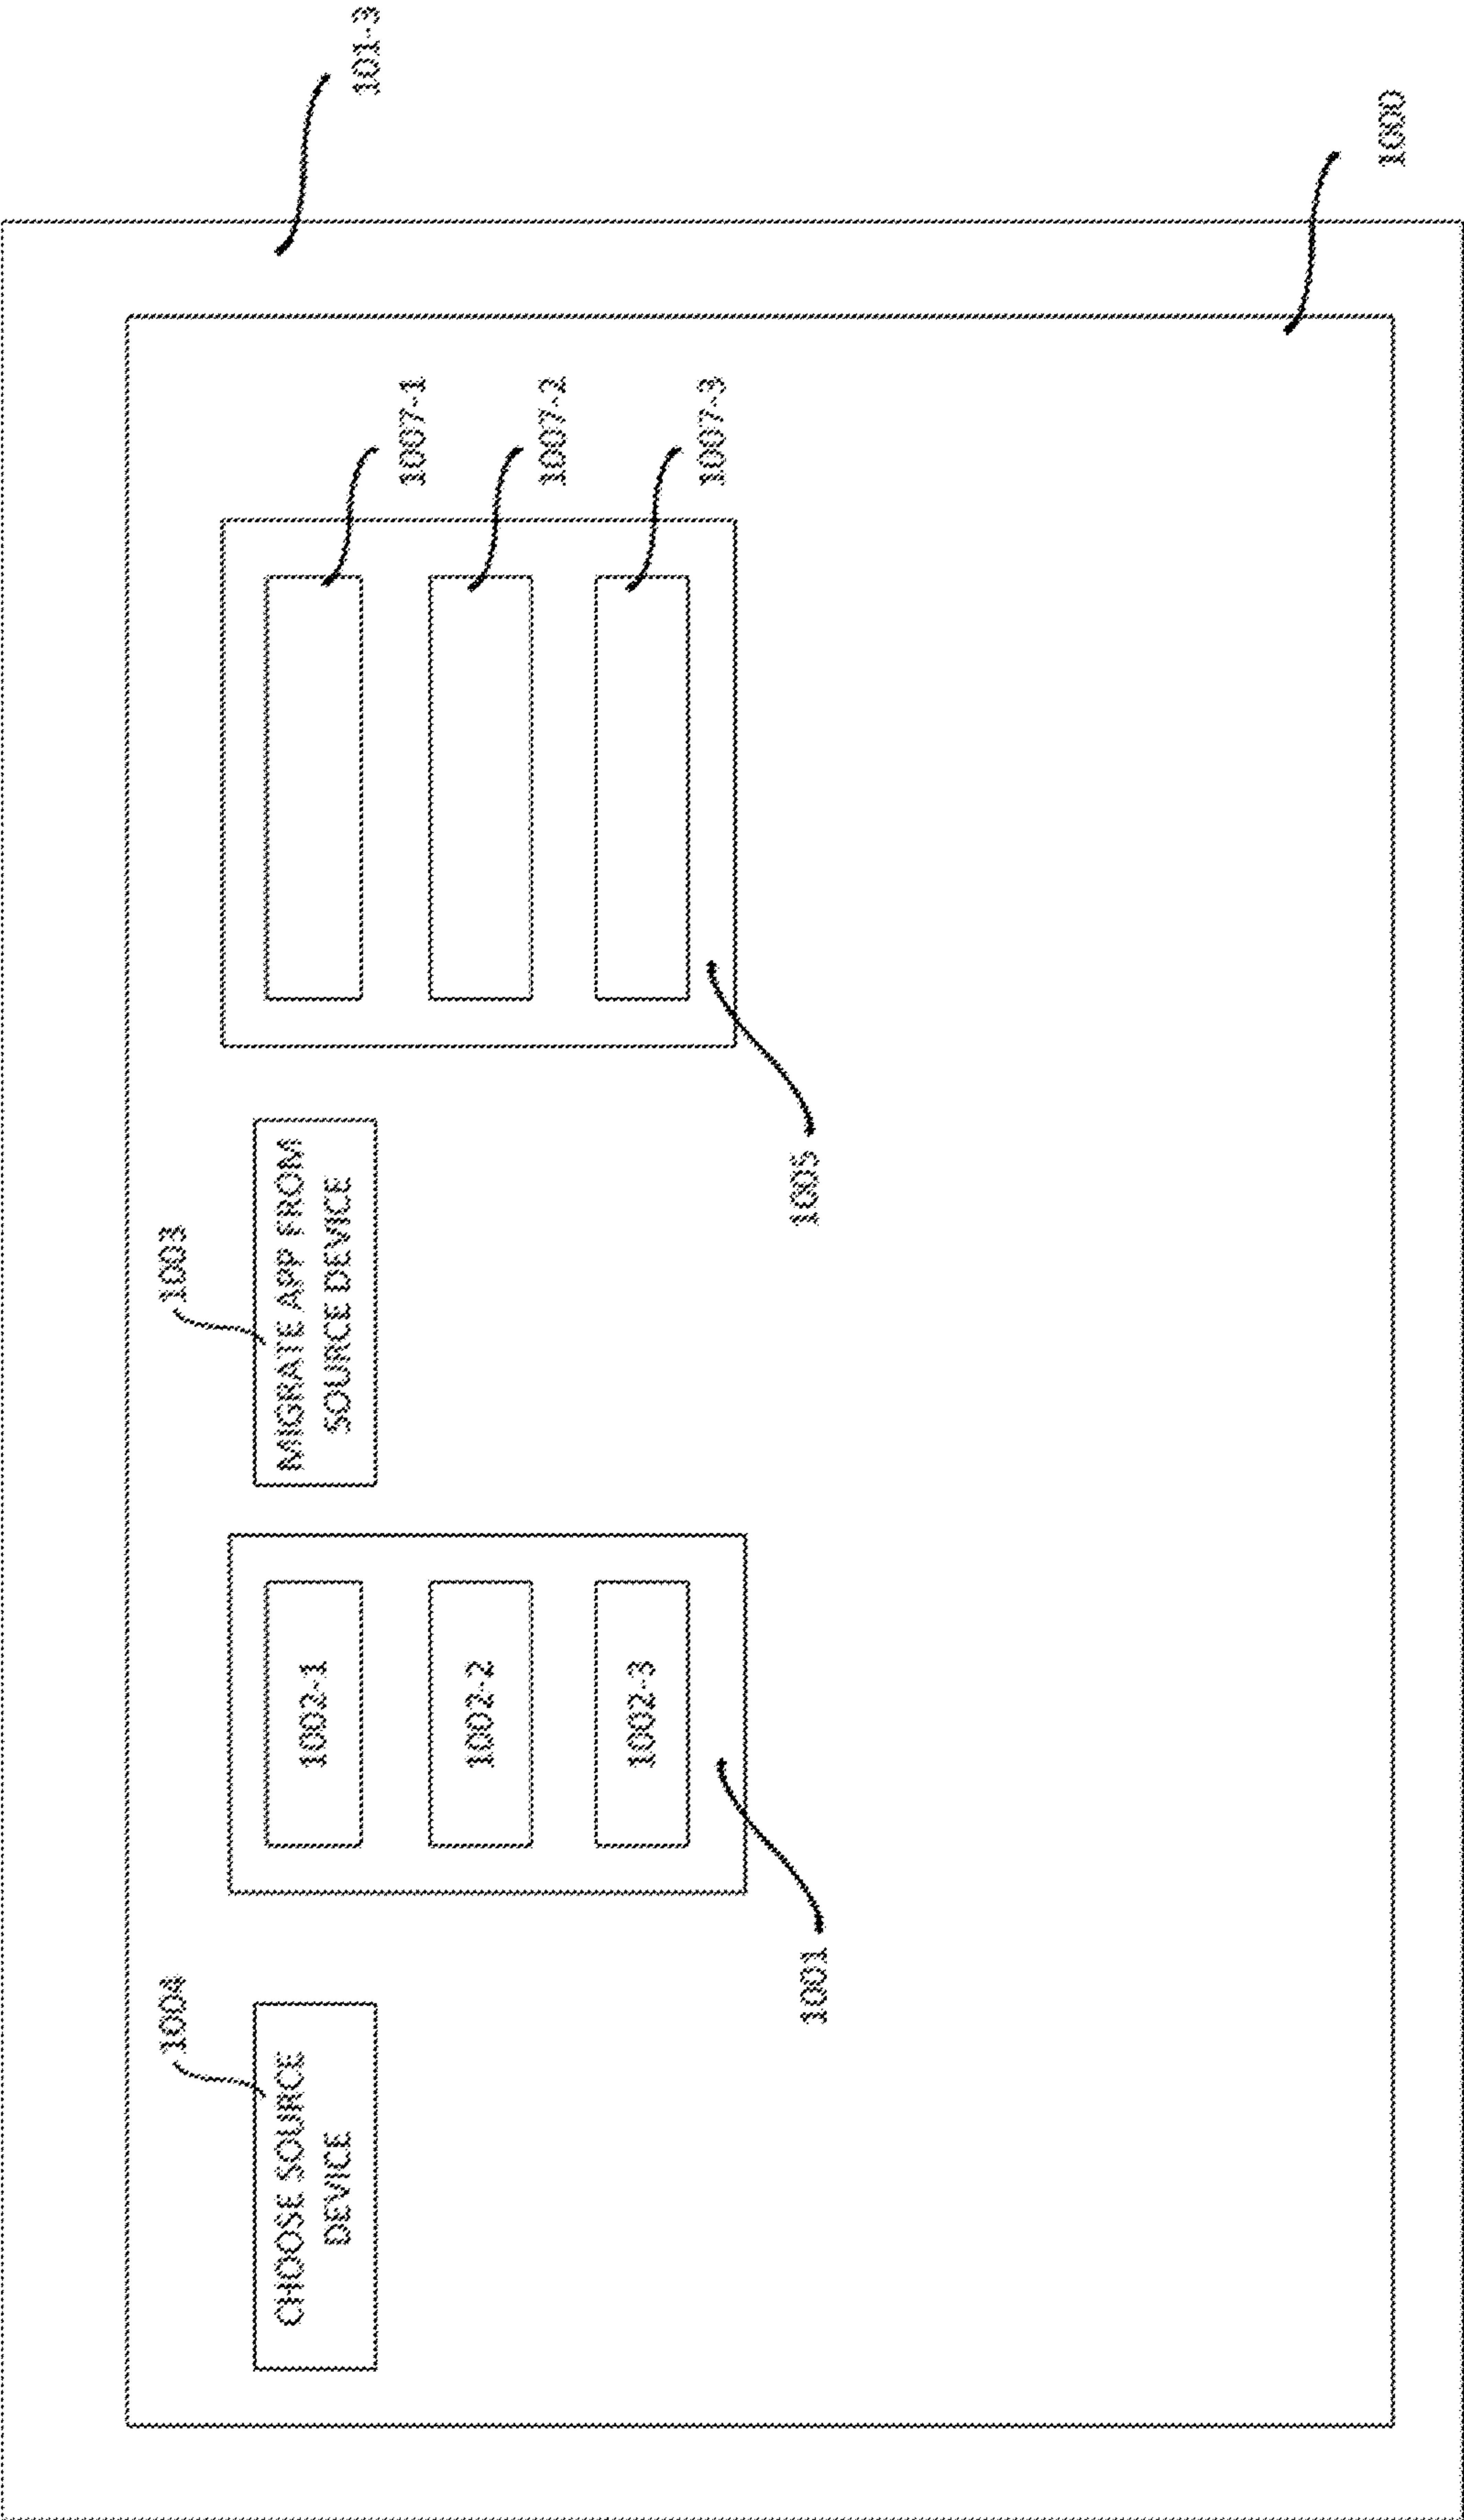


FIG. 10B

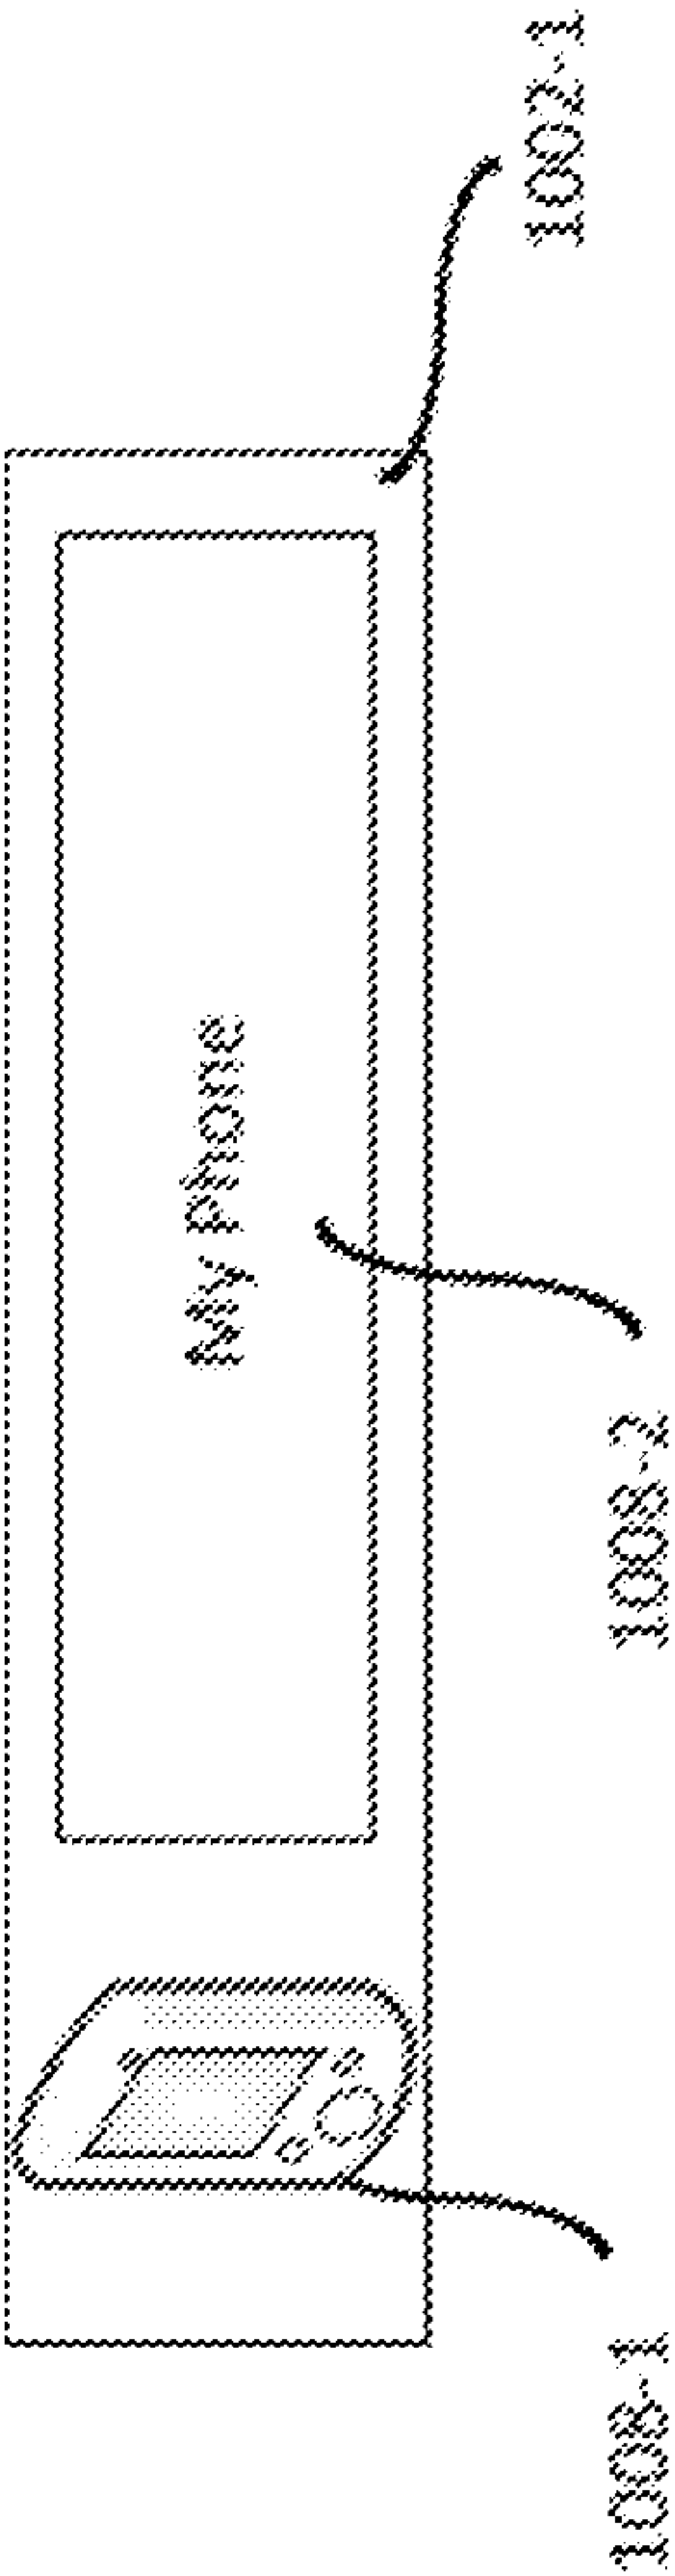

1

SYSTEM AND METHOD FOR DEVICE INTEROPERABILITY AND SYNCHRONIZATION

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 17/318,113, filed May 12, 2021, now allowed, which is a continuation of U.S. patent application Ser. No. 16/395,478, filed Apr. 26, 2019, now U.S. Pat. No. 11,048,520, which is a continuation-in-part of PCT Application No. PCT/IB2017/056516, filed on Oct. 19, 2017, which claims the benefit of and priority to U.S. Provisional Patent Application No. 62/413,169, filed on Oct. 26, 2016, all of which are incorporated herein by reference in their respective entireties.

FIELD OF THE INVENTION

The present disclosure relates to device interoperability for user devices.

BRIEF SUMMARY

A device interoperability system for one or more user devices associated with a user, wherein said one or more user devices comprises a first user device, said device interoperability system comprising a communications module, wherein a first connection is established between said first user device and said communications module; storage associated with said device interoperability system and coupled to said communications module, wherein said storage stores an operating system, one or more programs, and data associated with the user, further wherein said operating system is booted by said first user device via said first connection; and one or more processors to support said device interoperability system.

A method for device interoperability for one or more user devices associated with a user, said one or more user devices comprising a first user device; said method comprising providing a device interoperability system comprising a communications module, storage coupled to said communications module, enabling establishment of a first connection between said first user device and a said communications module; enabling said storage to store an operating system, one or more programs, and data associated with the user; and enabling booting of said operating system by said first user device via said first connection; enabling said operating system to run on said first user device, and use one or more processing capabilities of the first user device.

The foregoing and additional aspects and embodiments of the present disclosure will be apparent to those of ordinary skill in the art in view of the detailed description of various embodiments and/or aspects, which is made with reference to the drawings, a brief description of which is provided next.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other advantages of the disclosure will become apparent upon reading the following detailed description and upon reference to the drawings.

FIG. 1 illustrates a situation for a user with one or more user devices.

FIG. 2 illustrates an example of a device interoperability system working in conjunction with the user devices.

2

FIG. 2B illustrates an example architecture for the device interoperability system.

FIG. 2C illustrates an example of a gadget to run the device interoperability system.

FIG. 2D shows an example where the device interoperability system is integrated into a user device.

FIG. 2E shows an example where the device interoperability system runs as an application on a user device.

FIG. 3 shows an example algorithm for user device switchability between “stand-alone” and “interoperability system” modes.

FIG. 3B shows an example algorithm for switching the operating system between different hardware configurations on booting.

FIG. 4 shows an example embodiment of a caching operation.

FIG. 4B illustrates an example embodiment of caching where additional checks are performed before writing data to the cache.

FIG. 4C shows an example embodiment of prefetching to a cache.

FIG. 5 illustrates an example embodiment of different storage sub-areas, each having different associated security levels.

FIG. 6 illustrates an example embodiment of a hierarchy of secure storage for a user’s data.

FIG. 7A illustrates part of an example embodiment of a data restore process.

FIG. 7B illustrates part of an example embodiment of a data restore process.

FIG. 7C illustrates part of an example embodiment of a data restore process.

FIG. 8A illustrates part of an example embodiment of a data restore process where only data stored in a cache is used for data restore.

FIG. 8B illustrates part of an example embodiment of a data restore process where only data stored in a cache is used for data restore.

FIG. 9A illustrates an example embodiment of a graphical user interface (GUI) for a push-based application migration.

FIG. 9B illustrates an example embodiment of a GUI item corresponding to a user device for a push-based application migration.

FIG. 10A illustrates an example embodiment of a GUI for a pull-based application migration.

FIG. 10B illustrates an example embodiment of a GUI item corresponding to a user device for a pull-based application migration.

While the present disclosure is susceptible to various modifications and alternative forms, specific embodiments or implementations have been shown by way of example in the drawings and will be described in detail herein. It should be understood, however, that the disclosure is not intended to be limited to the particular forms disclosed. Rather, the disclosure is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of an invention as defined by the appended claims.

DETAILED DESCRIPTION

The number of devices owned or operated by a person has grown tremendously. Typically, a person has a plurality of computing devices, such as:

Smartphones,

Tablets,

Desktops,

Laptops,

Game consoles,
Smart watches/bands, and
Smart glasses.

In addition, many other devices and items have become “smart”, that is, their computing capabilities and processing power have increased, and they have been network enabled. These include, for example:

Vehicles such as cars and trucks,
Television (TV) sets,
Kitchen appliances such as refrigerators and microwave ovens,
Cameras,
Fitness devices such as FITBIT®,
Medical devices such as blood pressure monitors and heart rate monitors,
Air-conditioning systems, and
Smart home systems.

Furthermore the “Internet of Things” (IoT) has also grown tremendously. The IoT refers to networks of consumer and industrial devices interconnected with each other and with other computing devices.

All of this means that the number of devices which have computing and network capability, and are associated with a particular user, is growing rapidly.

FIG. 1 illustrates this situation. In FIG. 1, user devices **101-1** to **101-N** comprise the devices associated with user **100**. These include, for example, the electronic computing devices and the other devices and items mentioned above.

Given the situation shown in FIG. 1, users such as user **100** face many different challenges. Firstly, documents and data from different devices need to be synchronized with each other. Typically this is performed using, for example:

Portable data storage devices such as Universal Serial Bus (USB) flash drives, and removable hard drives, and
Network or “cloud”-based techniques.

These techniques of document and data synchronization have deficiencies. Cloud connectivity may not always be present. When it is, connectivity may be intermittent or slow. Privacy may also be an issue with cloud-based techniques.

Secondly, synchronization may be imperfect or incomplete due to each computing device and consumer item running different operating systems (OSes) and different platforms. Referring to FIG. 1, user device **101-1** to **101-N** have their own processing and memory capabilities and may run different OSes, platforms and software. As a consequence the user is forced to get used to different environments on different devices and also to repeat the same tasks for several devices, for example, installing applications, customizing settings or performing service tasks like software updates or antivirus scanning. Compatibility may also be an issue. As an example, if user **100** edits a file first with user device **101-1** and then with user device **101-2**, that file may end up being corrupted as a result due to the different versions of the editing software installed on user device **101-1** and **101-2**.

It is therefore necessary to address these deficiencies in device synchronization in order to ensure continued growth and adoption of “smart” technology; and interoperability of these user devices.

The remainder of this specification details a system and a method for device interoperability to address the above problems. An example architecture of such a device interoperability system **200** is shown in FIGS. 2 and 2B. In FIG. 2, one or more connections **201-1**, **201-2**, **201-3** to **201-N** between device interoperability system **200** and one or more user devices **101-1**, **101-2**, **101-3** to **101-N** are established as needed. In one embodiment, the one or more user devices

101-1, **101-2**, **101-3** to **101-N** initiate the establishment of the connection. In another embodiment, the device interoperability system **200** initiates the establishment of the connection.

Device interoperability system **200** comprises several components necessary for its functioning. An illustration of one embodiment of device interoperability system **200** is shown in FIG. 2B. As shown in FIG. 2B, device interoperability system **200** comprises battery **211**, battery charging module **221**, storage **212**, one or more processors **215** and communications module **213**.

The one or more processors **215** perform the functions of supporting the other elements of device interoperability system **200**. This includes, for example:

- maintaining interconnection between the elements of device interoperability system **200**,
- maintaining overall security of device interoperability system **200**, and
- service functions necessary for the operation of device interoperability system **200**.

Communications module **213** participates in the establishment of the one or more connections **201-1** to **201-N**. Communications module **213** also works to maintain the one or more connections **201-1** to **201-N** to the one or more user devices **101-1** to **101-N**. Communications module **213** also works to perform operations necessary to secure connections **201-1** to **201-N**. These include, for example, encryption and access operations. In one embodiment, communications module **213** also manages and optimizes power consumption related to one or more connections **201-1** to **201-N**. For example, communications module **213** adjusts the transmission powers used for the one or more connections **201-1** to **201-N** based on distances from user devices such as user device **101-1**.

Battery **211** supplies power for the operation of device interoperability system **200**. Charging module **221** enables charging of battery **211** using an external power source. In one embodiment, charging module **221** enables wireless charging.

As shown in FIG. 2B, storage **212** is coupled to communications module **213** and is used to store OS **214**, programmes and data **216** which are necessary for the functioning of device interoperability system **200**. For example, user preferences, applications and user documents and data may also be stored on storage **212**. The functioning of OS **214** will be discussed in detail below. In one embodiment, storage **212** is built using energy-efficient storage technology such as SSD (Solid State Drive) or embedded Multi-Media Controller (eMMC) flash memory technology. In one embodiment, the information stored in storage **212** is encrypted. This reduces the risk of a malicious party obtaining access to the stored information. In one embodiment, the Advanced Encryption Standard (AES) is used for encryption.

Referring to FIGS. 2 and 2B, connection **201-1** between device interoperability system **200** and user device **101-1** is established before the native user device **101-1** OS loads. Once connection **201-1** is established with user device **101-1**, OS **214** boots and runs from storage **212** on user device **101-1**. Then, user device **101-1** is able to access data and program code stored on storage **212** as required. The program code of OS **214** and installed applications is run on the user device which device interoperability system **200** is connected to, and uses the processing capabilities of this user device for its operation. For example, referring to FIG. 2, if device interoperability system **200** is connected to user device **101-1**, then the program code is run on user device

5

101-1 using the processing power and memory of user device **101-1** as needed. The establishment of connection **201-1** and subsequent booting of OS **214** is performed in a variety of ways, as will be detailed below.

In one embodiment, at least one of the connections **201-1** to **201-N** is a direct connection. This direct connection can be, for example, a direct wireless connection.

In some embodiments, user device **101-1** comprises firmware that provides the ability to support booting from device interoperability system **200** via a direct wireless connection. For example, in one embodiment, user device **101-1** comprises a Basic Input Output System (BIOS) or Unified Extensible Firmware Interface (UEFI) which supports the Media Agnostic USB specification. This allows the user device **101-1** to use the USB protocol over the direct wireless connection to facilitate the booting of OS **214** on the user device **101-1** and data transfer between device interoperability system **200** and user device **101-1**.

In some embodiments, user device **101-1** does not comprise firmware that provides the ability to support booting from device interoperability system **200** via a direct wireless connection. Then it is necessary to use an intermediary. For example, in one embodiment, the device interoperability system **200** is coupled wirelessly to a miniature USB dongle plugged into a USB port on user device **101-1**. Then the miniature USB dongle will simulate a USB flash drive connected to user device **101-1**. Then when user device **101-1** is switched on, the direct wireless connection is established between the miniature USB dongle and device interoperability system **200**. Then OS **214** is booted on the user device **101-1** from the storage **212** as though it is an ordinary USB flash drive connected to the USB port. In one embodiment, the user must change the BIOS or UEFI settings for user device **101-1** so that user device **101-1** will boot from the device interoperability system **200**.

In another embodiment, the direct connection is a direct wired connection. In a further embodiment, the at least one direct wired connection includes, for example, a USB connection. In further embodiments, the direct wired connection is a connection facilitated via docking. In yet another embodiment, at least one of the connections **201-1** to **201-N** are direct wireless and at least one of the connections **201-1** to **201-N** are direct wired.

When connection **201-1** between user device **101-1** and device interoperability system **200** is facilitated via docking, further embodiments are also possible. In one embodiment, both the device where device interoperability system **200** is installed, and user device **101-1** have direct docking capabilities including, for example, docking ports. Then, device interoperability system **200** interacts with the user device **101-1** via these direct docking capabilities. In yet another embodiment, the device where device interoperability system **200** is installed is coupled to a docking station which is connected to user device **101-1**. In a further embodiment, when the docking station is connected to user device **101-1** by, for example, USB cable, the user device **101-1** will recognize the docking station with the device where device interoperability system **200** is installed as a connected external USB drive. In one embodiment, the user must change the BIOS or UEFI settings for user device **101-1** so that user device **101-1** will boot from the USB connected device. In a further embodiment, the docking station provides charging for the device where device interoperability system **200** is installed.

While the above describes situations where connections **201-1** to **201-N** are direct connections between two devices, one of skill in the art would know that it is possible to use

6

indirect connections as well. In another embodiment, at least one of the connections **201-1** to **201-N** are indirect connections. These indirect connections include, for example, one or more of:

connections facilitated via a Local Area Network (LAN), or connections facilitated via a cloud-based service.

In a further embodiment, when at least two of the described above types of connection are available, the choice between connection types is performed automatically for at least one of the connections **201-1** to **201-N**. In one embodiment, the choice is based on the following factors:

connection speed,
connection latency,
data transmission costs,
user preferences.

In a further embodiment, when the connectivity is lost, either a different type of direct or indirect connection is automatically selected.

In a further embodiment, the at least one connection is secured. The securing is performed by, for example:

Encryption using techniques such as Wi-Fi Protected Access (WPA2), and

Requiring access authentication on both endpoints of a connection when the connection is first established. This is performed using, for example passwords and techniques such as near field communication (NFC) or Wi-Fi Protected Setup (WPS)-like algorithms.

In embodiments where the at least one connection is secured, before establishing the connection authentication is performed at the end points, that is, between device interoperability system **200** and user device **101-1**.

Device interoperability system **200** can be implemented in a variety of ways. In one embodiment, device interoperability system **200** is implemented using a separate gadget, such as gadget **210** as shown in FIG. 2C. Then, the one or more connections **201-1** to **201-N** are established with gadget **210**.

In another embodiment, device interoperability system **200** is installed via integration into one of user devices **101-1** to **101-N**. For example, as shown in FIG. 2D, device interoperability system **200** is integrated into user device **101-1**. This is achieved by, for example, implementing device interoperability system **200** as a firmware module of user device **101-1**. Then, device interoperability system **200** uses one or more of the battery, storage, communications module, processors and other capabilities of user device **101-1** in a similar fashion to the above-described use of battery **211**, storage **212**, one or more processors **215** and communications module **213** for its operation. OS **214** is stored within the storage of user device **101-1**. Then the user device **101-1** runs OS **214** instead of its native OS. When, as shown in FIG. 2D, at least one of connections **201-2** to **201-N** are established between user device **101-1** and at least one of the other devices **101-2** to **101-N**, device interoperability system **200** enables the connected user device to:

boot OS **214** which is stored in the storage of user device **101-1**, and

use programmes and data **216** which are stored in the storage of user device **101-1**.

In a further embodiment, some hardware components of the user device **101-1** with integrated device interoperability system **200** are recognised and used by the OS **214** as connected external devices, when OS **214** runs on a different device which is connected to user device **101-1**. For example, in the case where user device **101-1** is a smartphone: When OS **214** runs on user device **101-2** which is connected to user device **101-1**, the hardware components of

user device **101-1** such as the microphone, sensors, mobile telecommunications module and display are used by OS **214** as external devices.

In yet another embodiment, device interoperability system **200** is implemented as an installed application or an “app” which runs on one of user devices **101-1** to **101-N**, for example user device **101-1**. For example, as shown in FIG. 2E, device interoperability system **200** runs as an app on user device **101-1**. Then device interoperability system **200** uses one or more of the battery, storage, communications module, processors and other capabilities of user device **101-1** for its operation, similar to the integrated case described above and in FIG. 2D. Similar to as described above, when a connection is established with a user device, device interoperability system **200** gives the connected user device the ability to boot OS **214** which is stored in the storage of user device **101-1**. In another embodiment, in case the app is not able to provide the required level of access to data stored on storage **212** of user device **101-1** which is used to boot OS **214** on user device **101-2**, the interoperability system **200** also includes a separate image of

either a copy of the OS **214**, or
some of its components.

This image is used on its own or in conjunction with user device **101-1** OS’s components stored on storage of user device **101-1** to boot the OS on user device **101-2**. Similar to the cases described above, in a further embodiment, some hardware components of the user device **101-1** are recognised and used by the OS **214** as connected external devices, when OS **214** runs on a different device which is connected to user device **101-1**.

In some of the embodiments where device interoperability system **200** is installed via integration into user device **101-1** or as an app on user device **101-1**, as part of communications module **213**, an external wireless adapter is added to user device **101-1** to provide additional communications capabilities not available on user device **101-1**, so as to improve performance and/or energy efficiency. This external wireless adapter works with, for example, an integrated controller which is already present on user device **101-1**. Then, the communications module **213** comprises the integrated controller and the external wireless adapter of user device **101-1**. For example, a USB wireless adapter based on WiGig or Li-Fi communication technology is plugged into a USB port of user device **101-1**. This plugged in wireless adapter will interact with an integrated USB controller already present on user device **101-1**. Then, the communications module **213** comprises this integrated USB controller and plugged in USB wireless adapter. These added components provide additional communication technology which is not initially available on user device **101-1** to improve performance and/or energy efficiency.

An example of the operation of device interoperability system **200** will be detailed below with reference to a user device, specifically user device **101-1**. The descriptions below are applicable to a variety of situations including, for example:

- device interoperability system **200** installed on a gadget such as gadget **210**;
- device interoperability system **200** is installed via integration into one of user devices different from user device **101-1**, for example user devices **101-2** to **101-N**; and
- device interoperability system **200** is installed as an app on one of user devices different from user device **101-1**, for example user devices **101-2** to **101-N**.

Additionally, there is a need to determine if user device **101-1** will operate in either “stand-alone” or “device interoperability system” mode. In stand-alone mode, the user device **101-1** runs its native OS. In interoperability system mode, the user device **101-1** is connected to device interoperability system **200** and runs OS **214**. In a further embodiment, the user device **101-1** is switchable between stand-alone and interoperability system modes.

An example algorithm for switching between stand-alone and interoperability system modes comprising:

establishment of connection **201-1** in the embodiments where connection **201-1** is a secured connection, subsequent booting of the appropriate OS depending on whether stand-alone or interoperability modes is used, is provided in FIG. 3.

In FIG. 3, in step **301**, user device **101-1** is switched on. In step **302**, prior to establishing connection **201-1**, user device **101-1** presents the user with the option of setting up for interoperability system mode.

If the user accepts the option of setting up for interoperability system mode within a predetermined period in step **303**, then in step **304** the user performs authentication. In one embodiment, in step **304** the user enters a unique string, password or passphrase specific to the device interoperability system **200**. In another embodiment, in step **304** the user enters a login name and a password specific to the OS **214**. In yet another embodiment, the user uses login details from another social media site, or web mail site, for example, Facebook®, LinkedIn®, Twitter®, Google®, Gmail®, or others. Additional steps are also possible for authentication. In another embodiment, the user is additionally asked to recognise a combination of letters, numbers and symbols in an image and enter the combination into a box. An example of such a test is the Completely Automated Public Turing test to tell Computers and Humans Apart (CAPTCHA) test. In another embodiment, the user is asked a security question, to which the user only knows the answer. In yet another embodiment, the user may be asked additional personal information, such as date of birth and home address. In another embodiment, the user is asked to take a picture of himself or herself and the device interoperability system **200** will match the image to a pre-stored image. In yet another embodiment other biometric measures such as fingerprints scanning are used. The authentication data is used as a pre-shared key and authentication/encryption keys for encrypted connection are built.

In step **306**, the user device saves the authentication/encryption keys and connection parameters for future use.

In step **307**, connection **201-1** is established.

In step **308**, OS **214** boots on user device **101-1**.

In step **309**, the user device **101-1** works in device interoperability system mode.

If the user does not accept the option of setting up for interoperability system mode in step **303**, then in step **305**, user device **101-1** determines if it is already set up for interoperability system mode. If in step **305** the user device **101-1** is already set up, then in step **310** the user device tries to establish a connection with device interoperability system **200** using the stored authentication keys and parameters.

Following on from step **310**, if the connection establishment is successful in step **311** then the OS **214** boots on user device **101-1** (step **308**), and the user device **101-1** works in device interoperability system mode (step **309**).

If the connection is unsuccessful in step **311**, then user device **101-1** loads its own OS in step **312**. In step **313**, the user device **101-1** works in stand-alone mode.

If in step 305 the user device is not already set up, then the user device 101-1 loads its own OS (step 312) and works in stand-alone mode (step 313).

In one embodiment, in order to improve speed of operation and to reduce the amount of data transmitted through a connection such as connection 201-1, the swap file or swap partition of OS 214 is placed on the storage of the user device 101-1.

In one embodiment, in order to improve speed of operation, caching is performed by, for example, setting aside a portion of the storage of the connected user device for a cache. In one embodiment, when OS 214 is booted, it will determine if there is a cache on the connected user device. Caching operations will be discussed in detail further below.

In one embodiment, at least some portion of the local storage of a user device connected to device interoperability system 200 is used by OS 214 to store data intended for use only on this particular device. An example is where user device 101-1 is a desktop used by user 100 specifically for running high resource demand applications such as video games. Then, some of the data necessary for running the high resource demand application is stored on the local storage of user device 101-1 instead of storage 212. In a further embodiment, the portion of the user device 101-1 storage which is to be used is recognized by OS 214 as a connected additional drive and presented accordingly.

In one embodiment, a portion of the local storage space of a user device connected to device interoperability system 200 is used by OS 214 to perform a backup of at least some of the data stored in storage 212. The amount of data which is backed up depends on the available capacity of the local storage of the user device. In a further embodiment, the backup is performed using a plurality of user devices. That is, data is backed up from storage 212 to a portion of each local storage space corresponding to each of the plurality of user devices.

In yet another embodiment, a backup status is associated with each portion of data stored in storage 212. Then when a backup operation is performed on that particular portion of data, the backup status is updated.

In a further embodiment, at least some of the data which is stored on the storage of user device 101-1 for either caching, swapping, expanding storage, backups or any combination of these purposes is placed in one or more partitions set up on the storage of user device 101-1. In another embodiment, the data which is stored on the storage of user device 101-1 for either caching, expanding storage, backups or any combination of these purposes is placed in one or more file-containers created in an existing partition of user device 101-1. This eliminates the need for repartitioning or erasing any data from the storage of user device 101-1.

In a further embodiment, the data which is stored on the storage of user device 101-1 for either caching, swapping, expanding storage, backups or any combination of these purposes is encrypted. The decryption keys are stored and managed by OS 214 thus preventing unauthorized access to the data.

In one embodiment, the OS 214 is able to switch between different hardware configurations during booting, such as in step 308 of FIG. 3. An example algorithm for switching between different hardware configurations is provided in FIG. 3B.

When the OS 214 is booted on a user device such as user device 101-1, then in step 3B-01 OS 214 identifies the user device. In step 3B-02, OS 214 determines whether it has stored the configuration set corresponding to the identified user device in storage 212. If yes, then in step 3B-03 OS 214

uses the correct set of drivers and setting for the identified user device. The user device then works in device interoperability system mode in step 3B-07.

If in step 3B-02 OS 214 is unable to find the configuration set corresponding to the identified user device in storage 212, then in step 3B-04 OS 214 will detect all hardware on this user device and install needed drivers automatically.

In step 3B-05, OS 214 prompts the user to enter one or more answers to one or more questions to determine how the user device storage will be used for the functioning of OS 214. Example questions include:

- will the user device storage be used for caching?
- will the user device storage be used for backups?
- will the user device storage be used to provide additional storage space for OS 214 for its use?
- how much space will be reserved for specified above purposes?

In step 3B-06, OS 214 will save the configuration set and reboot if necessary, before proceeding to work in device interoperability system mode in step 3B-07.

As mentioned previously, example embodiments of caching operations are discussed in detail below with reference to FIGS. 4, 4B and 4C.

FIG. 4 shows an example flow when a received read or write operation request is processed by OS 214. In this example OS 214 is stored on the device where device interoperability system 200 is installed. This device is connected to user device 101-1. Also, a cache has been set up on user device 101-1.

In step 401, the request type is determined by OS 214.

If the request is determined to be for a read operation, then in step 403 the OS 214 determines if the cache contains the requested data. In one embodiment, OS 214 accesses the cache service database to determine if the cache set up on user device 101-1 contains the requested data. The cache service database describes modification times of the versions of the files stored in at least one of the caches of the user devices 101-1 to 101-N, and modification times of the original versions of those files stored in the storage 212. Determination if the cache contains the requested data is performed by comparison of those modification times. The cache service database is stored in storage 212.

Table 1 shows an example of a cache service database:

TABLE 1

Example of Cache Service Database				
File [1C-01]	Storage 212 [1C-02]	Cache #1 [1C-03]	Cache #2 [1C-04]	...
C:\path1\file1 [1R-01]	dd/mm/yy HH:MM:SS	dd/mm/yy HH:MM:SS	dd/mm/yy HH:MM:SS	
	[1R-01, 1C-02]	[1R-01, 1C-03]	[1R-01, 1C-04]	
C:\path2\file2 [1R-02]	dd/mm/yy HH:MM:SS	n/a [1R-02, 1C-03]	dd/mm/yy HH:MM:SS	
	[1R-02, 1C-02]		[1R-02, 1C-04]	
...				

In Table 1, column 1C-01 represents the files. Each file corresponds to a separate row of Table 1. With reference to Table 1, file 1 is assigned to row 1R-01, file 2 is assigned to row 1R-02 and so on.

Column 1C-02 of Table 1 represents the modification times of the original versions of those files stored in the storage 212 and in at least one of the caches on the user devices 101-1 to 101-N. Then, referring to Table 1:

Cell [1R-01, 1C-02] represents the modification time of the original version of file 1 in storage 212,

11

Cell [1R-02, 1C-02] represents the modification time of the original version of file 2 in storage **212**,

Columns 1C-03 and 1C-04 represent the modification times of the versions of the file in the respective caches. For example, column 1C-03 corresponds to the cache 1 stored on user device **101-1**, 1C-04 corresponds to cache 2 stored on user device **101-2**, and so on. Then:

Cell [1R-01, 1C-03] represents the modification time of the version of file 1 in cache 1,

Cell [1R-01, 1C-04] represents the modification time of the version of file 1 in cache 2,

Cell [1R-02, 1C-03] represents the modification time of the version of file 2 in cache 1, and

Cell [1R-02, 1C-04] represents the modification time of the version of file 2 in cache 2.

There are a variety of formats which can be used to represent the times in the cache service database. One example format is a two-digit representation of day/month/year followed by hour:minute:second or “dd/mm/yy HH:MM:SS”.

There is a variety of other information which can be also included in the cache service database. For example, the cache service database can also include file sizes and checksums for data integrity checks.

In another embodiment the cache service database is based on file checksums instead of file modification times. Then, the cache service database describes checksums of the versions of the files stored in at least one of the caches of the user devices **101-1** to **101-N**, and checksums of the original versions of those files stored in the storage **212**. Determination if the cache contains the requested data is performed by comparison of those checksums.

If the data cannot be found on the cache in step **404**, or the data on the cache has a modification time which is different from the modification time of the corresponding data on storage **212** (step **405**), or the checksums are different; then OS **214** retrieves the data from storage **212** (step **406**). In step **408**, the retrieved data is then written into the cache, so that subsequent data read operations are performed using the cache. This also has the advantage of reducing the power consumption of the device where device interoperability system **200** is installed, as data does not have to be transmitted from this device to user device **101-1** via connection **201-1**. In step **409**, the cache service database is also updated.

If, in step **404** the data is found on the cache, and the data on the cache matches the corresponding data on storage **212** (step **405**); then in step **407** the data is read from the cache.

In a further embodiment, if the request type is determined to be a write operation in step **401**, then in step **402** OS **214** performs a data write operation. In one embodiment, this data write operation is performed in write-through mode. Then, following from the OS **214** writing the data to storage **212** via connection **201-1** in step **402**, OS **214** also writes data to the user device **101-1** cache in step **408**. In step **409**, the cache service database is also updated.

In another embodiment, one or more additional checks are performed to determine whether the data should be written to the cache. FIG. **4B** illustrates an example of an embodiment. Steps **4B-01** to **4B-07** are similar to steps **401-407** in FIG. **4**. In step **4B-08**, additional checks are used to determine if the data is suitable for caching. Examples of the factors which are examined to determine if the data is suitable for caching include:

- Maximum capacity of the cache,
- Utilization of the cache capacity,
- Size of data item,

12

- Usage frequency of data item,
- Time expiration of data item,
- Currently running applications,
- Previously collected data usage patterns, and
- Device type of user device **101-1**.

If the data is determined to be suitable for caching in step **4B-08**, then in step **4B-10** the data is written to the cache and in step **4B-11** the cache service database is updated.

In one embodiment, the OS **214** performs additional cache servicing functions, for example:

- cache defragmentation, or
- deletion of less cache-suitable data to free up space.

Then, the above described factors used in step **4B-08** are used to optimize the performance of these additional cache servicing functions as well.

In a further embodiment, if the data is determined to not be suitable for caching in step **4B-08**, then in step **4B-09** an additional check to determine the necessity of updating of the cache service database is performed. For example, if the data is determined not to reside in any cache of any user device, then it is unnecessary to update the cache service database.

In one embodiment, when user device **101-1** runs OS **214**, data is prefetched from storage **212** and used to update the user device **101-1** cache. That is, data is fetched from storage **212** and transmitted to the user device **101-1** cache in readiness for future use.

FIG. **4C** shows an example embodiment of prefetching. In step **4C-01**, data stored in storage **212** is compared by the OS **214** to the data stored in the user device **101-1** cache. The OS **214** performs the data comparison by comparing the information from the cache service database corresponding to user device **101-1**, to the information stored in file system of the storage **212**.

If the data stored in the connected cache is determined not to match the data stored in storage **212** in step **4C-02**, then in step **4C-03** the OS **214** determines which of the one or more portions of data stored in storage **212** are different compared to the data on the user device **101-1** cache.

In a further embodiment, in step **4C-04**, OS **214** selectively prefetches one or more portions of data stored in storage **212** which are different from the data stored in the cache of user device **101-1**.

The selection and prioritization of data depends on several factors:

- Connection of the device where device interoperability system **200** is installed to a power source,
- Charge level of battery **211**,
- Total capacity of battery **211**,
- Current utilization of connection **201-1**,
- Current user activity,
- Current hardware utilization of user device **101-1**
- Maximum capacity of the connected cache,
- Utilization of the cache capacity,
- Size of data portion,
- Usage frequency of data item,
- Time expiration of data item,
- Currently running applications,
- Previously collected data usage patterns, and
- Device type of user device **101-1**.

Then in step **4C-05**, the cache service database is updated accordingly based on the data stored in the user device **101-1** cache.

In one embodiment, security measures are used so as to reduce the risk of a malicious party gaining access to device interoperability system **200**. For example, in one embodi-

13

ment access to device interoperability system **200** is secured using biometric measures such as fingerprints scanning or facial recognition.

In other embodiments, multi-factor authentication is used to secure device interoperability system **200**. In some embodiments, a multi-factor authentication process is based on the following factors, or answering the following questions:

- The knowledge factor, or what I know;
- The possession factor, or what I have; and
- The inherence factor, or what I am.

In one embodiment, the OS **214** is able to pause its operation if the connection **201-1** is lost, and resume operation immediately when the connection is reestablished.

In one embodiment, OS **214** includes one or more kernels corresponding to one or more architectures. For example, OS **214** includes kernels for the x86 and ARM architectures. Then depending on the architecture of the connected user device, the appropriate kernel is used automatically. This behavior is completely transparent for the user.

In one embodiment, a graphical user interface (GUI) is generated on user device **101-1** to enable the user to interact and interface with user device **101-1** including OS **214**. In one embodiment, the OS **214** automatically optimizes and adapts the GUI according to the following factors:

- physical form-factor of the user device **101-1**. For example, what type of device is user device **101-1**? Is it a laptop, tablet, TV set, game console or integrated in-car system?
- number and size of screens associated with the user device **101-1**;
- screen resolution; and
- input methods. For example, is the input device a keyboard and mouse, touchscreen, infrared remote control or gamepad?

Examples of GUI optimizations and adaptations include:

- adjusting the size and placement of GUI control elements such as buttons and checkboxes;
- adjusting the size and placement of windows;
- enabling or disabling specific text input methods such as on-screen keyboard or voice text input;
- enabling or disabling GUI parts for device-specific features such as controls for in-car air conditioning system.

In one embodiment, OS **214** is only able to work on one connected user device at a time. An example is when OS **214** is running on user device **101-1**. Then, to work on a different user device such as user device **101-2** after establishing connection **201-2**, in one embodiment OS **214** must be shut down on user device **101-1**, then booted on user device **101-2**. In another embodiment, OS **214** operation on user device **101-1** is first paused. Then OS **214** is either booted or, if it was previously paused, resumed on user device **101-2**.

In another embodiment, OS **214** is able to work with a plurality of user devices such as, for example, user devices **101-1**, **101-2** and **101-3**. In order to enable this, in an embodiment communications module **213** is able to establish and simultaneously maintain connections **201-1**, **201-2** and **201-3** with user devices **101-1**, **101-2** and **101-3** respectively. Then, user devices **101-1**, **101-2** and **101-3** are simultaneously connected to the device interoperability system **200** and each one of these user devices runs its instance of OS **214** in parallel with each other. In one embodiment, the transmission capacity of communications module **213** is balanced between connections **201-1**, **201-2** and **201-3** according to the current utilization of each connection.

14

In a further embodiment, different instances of OS **214** which are simultaneously running on user devices **101-1**, **101-2** and **101-3** use the distributed lock management approach to coordinate concurrent access to the storage **212**. For example, the lock managers of all three instances of OS **214** which are running on the user devices **101-1**, **101-2** and **101-3**, use the same lock database which is distributed among these instances by means of device interoperability system **200** and connections **201-1**, **201-2** and **201-3**.

In one embodiment, the interoperability system **200** is used by the different instances of OS **214** which are simultaneously running on different user devices to exchange some details about their current status. This, for example, includes:

- number and device types of simultaneously working user devices,
- status of important OS service functions, for example, an OS update process,
- current user activity, and
- currently running applications.

This data is used by every running instance of OS **214** to coordinate and optimize its service functions. For example, when three instances of OS **214** are running on user devices **101-1**, **101-2** and **101-3**, coordination is performed to ensure that the OS update process is not running simultaneously on all three devices. In a further embodiment, this data is used to prioritize the balancing of the transmission capacity of communications module **213** between established connections **201-1** to **201-3**. For example, a higher priority is given to that user device which user **100** currently uses.

In yet another embodiment, the OS **214** supports migration of running applications between OS instances running on different user devices. With reference to the example above, OS **214** supports the ability to move a currently running application from user device **101-2** to user device **101-3**. After the migration, the application continues to have access to any previously opened files. In a further embodiment, the data described previously is used to present more details to a user if the user opts to migrate applications and the connections **201-2** and **201-3** are used to facilitate the migration process.

The use of device interoperability system **200** offers several other advantages. In some embodiments, device interoperability system **200** is used in conjunction with cloud-based data synchronization capabilities. For example, if cloud-based services are used for synchronization of data between different user devices, device interoperability system **200** reduces the necessity for user devices to connect to the cloud to perform data synchronization. Instead, the user devices use data from storage **212**. This reduces the utilization of the cloud connection with the user devices. Furthermore, in some embodiments, the device interoperability system **200** ensures data availability in case cloud connectivity is lost or not available, as the user devices can retrieve data from storage **212**. In some embodiments, intelligent approaches to ensuring availability of data which is most likely to be relevant to a user are employed. These include, for example, approaches based on:

- Temporal locality: Data which was most recently used on a user device is stored on storage **212** as it is likely that the user device will use this data again in the near future.
- Spatial locality: Data sets which occupy memory locations close to recently used data are stored on storage **212** as it is likely that the user device will use these data sets in the near future.

15

Branch locality: In cases where there are multiple possible outcomes from conditional branching instructions, then data related to each of these outcomes are stored on storage **212** as it is likely that the user device will use this data.

Probabilistic analysis of user interactions with user devices: For example, if there is a high probability that a user will use one or more data sets either in conjunction with or after using a particular program, then these data sets are stored on storage **212**.

In some embodiments, some user data is stored on storage **212** but not within the cloud. This capability is useful if, for example, users want to keep control of sensitive data.

On its own, the feature of storing some user data within local storage and not in the cloud has been implemented in, for example, the Samsung Galaxy S10. The Samsung Galaxy S10 is built with the new defence-grade proprietary Samsung Knox platform, and has secure storage backed by hardware to house private keys for blockchain-enabled mobile services, as discussed in, for example, <https://news-samsung.com/global/samsung-raises-the-bar-with-galaxy-s10-more-screen-cameras-and-choices>, retrieved Mar. 20, 2019. This feature enables Samsung Galaxy S10 users to keep control of their private keys rather than exposing it to potential security breaches in the cloud.

The security of this feature is enhanced by the addition of device interoperability system **200**. In particular, this enhancement is achieved by running device interoperability system **200** on a device or gadget where storage **212** has these secure storage capabilities, and allowing only user devices that are connected to device interoperability system **200** and have been booted up using OS **214** to access the data stored within storage **212**. As will be seen below, this enables the creation of a more secure and private ecosystem.

For example: In the case where private keys for blockchain-enabled mobile services are stored on storage **212**, only user devices that are connected to device interoperability system **200** and have been booted up using OS **214** are able to access these private keys. This is useful, for example, to ensure that the user is able to securely perform cryptocurrency transactions.

Sensitive data can be further secured through other means. For example, in some embodiments, as explained previously, the sensitive user data is encrypted prior to being stored in storage **212**. In some of these embodiments, the user selects the type of encryption to be used.

In other embodiments, sensitive user data is not accessible directly to user devices that have been connected to device interoperability system **200** and have been booted up using OS **214**. Instead, only the results of processing or operations performed by, for example, one or more programmes which are part of programmes and data **216** residing on storage **212** and which uses the sensitive data, are made available to the user devices. For example, if the user using user device **101-3** wants to perform cryptocurrency transactions and needs to access private keys to sign transactions, then the transactions which require signing are transmitted from the user device **101-3** over connection **201-3** to the device interoperability system **200**. At device interoperability system **200**, the transactions are signed using one or more programmes resident on storage **212**. The signed transactions are then transmitted back over connection **201-3** to the user device **101-3**. This way, user device **101-3** does not access the sensitive user data at all.

In some embodiments, the availability of the sensitive user data or the results of processing or operations which use the sensitive data is based on a security level associated with

16

the user device. This is illustrated with reference to user device **101-3**. For example, in some embodiments, the user device **101-3** is considered to have a low security level if it is publicly accessible. If user device **101-3** is only privately accessible and access is secured using, for example, two authentication factors as described previously, it is considered to have a very high security level.

In some embodiments, storage **212** comprises several storage sub-areas, wherein each sub-area has a different associated security level. An example embodiment is shown in FIG. 5, where storage **212** comprises one or more sub-areas **510-1** to **510-4**. Then, for example:

Sub-area **510-1** has the highest level of security,

Sub-area **510-2** has the second highest level of security,

Sub-area **510-3** has the third highest level of security, and

Sub-area **510-4** has the lowest level of security.

The Samsung Galaxy S10 is an example of this, as it has a secure storage sub-area to store private keys for blockchain-enabled mobile services and a less secure storage sub-area. This can also be used to differentiate the level of access of a user device to data. For example:

the most sensitive data is stored in the most secure storage sub-area,

the next most sensitive data is stored in the next most secure storage sub-area, and so on.

The implementation of sub-areas within storage **212** into sub-areas can be carried out in a variety of ways. In some embodiments, the implementation is performed physically, that is, each sub-area corresponds to a different physical storage area. In some embodiments, the implementation is performed virtually, that is, a physical storage area is partitioned into different sub-areas. In yet other embodiments, a combination of virtual and physical implementations is used.

In some embodiments, the above concepts are combined to create a hierarchical or differentiated system of secure storage for a user's data. This hierarchy has a plurality of levels, wherein each level of the hierarchy corresponds to a different level of data sensitivity and therefore required security.

FIG. 6 shows an example embodiment of such a hierarchy **600**. In hierarchy **600**,

Sensitivity level **601** corresponds to the user's most sensitive data, and the highest level of security **611** is assigned to data with sensitivity level **601**.

Sensitivity level **602** corresponds to the user's second most sensitive data, and the second highest level of security **612** is assigned to data with sensitivity level **602**.

Sensitivity level **603** corresponds to the user's third most sensitive data, and the third highest level of security **613** is assigned to data with sensitivity level **603**, and

Sensitivity level **604** corresponds to the user's least sensitive data, and the lowest level of security **614** is assigned to data with sensitivity level **604**.

Then the accessibility to the data is based on the security level which has been assigned to the data. An example of this is demonstrated below with reference to FIGS. 5 and 6. For example:

Data with security level **611** is not accessible to user devices and is stored in storage sub-area **510-1**. The results of processing or operations which use the data are accessible to a user device, if the user device has been connected to device interoperability system **200**,

17

the user device was booted by OS **214**, and
the security level associated with the user device is very
high;

Data with security level **612** is stored in storage sub-area
510-2. It is accessible to a user device, if
the user device has been connected to device interoper-
erability system **200**,

the user device was booted by OS **214**, and
the security level associated with the user device is
high;

Data with security level **613** is stored in storage sub-area
510-3. It is accessible to a user device if
the user device has been connected to device interoper-
erability system **200**,

the user device was booted by OS **214**, and
the security level associated with the user device is
medium; and

Data with security level **614** is stored in the cloud.

User data can be assigned to one of sensitivity levels
601-604 using different techniques. In some embodiments,
assignment is based on user inputs on a user interface
presented to the user at a user device. The user interface is,
for example, a GUI. An example embodiment is as follows:
A user assigns data to one of the levels by selecting a
sensitivity setting of Very High, High, Medium, Low cor-
responding to levels **601-604**. Then, based on this setting,
one of the security levels described above is assigned to the
data.

In other embodiments, user data is assigned to one of
levels **601-604** based on the type of data. For example,
sensitivity level **601** may be assigned to data related to an
ultra-secure cryptocurrency “cold wallet” such as crypto-
currency, public and private keys as well as signing private
keys for cryptocurrency transactions. Sensitivity level **602**
may be assigned to user Personal Identification Numbers
(PINs) and passwords for financial applications. Sensitivity
level **603** is assigned to user media files that the user has
indicated are sensitive. Finally, sensitivity level **604** is
assigned to other user data which the user has allowed many
cloud-based applications to use.

The above shows an embodiment where one level of
security is assigned based on the sensitivity level of the data.
In some embodiments, more than one level of security to be
assigned based on the sensitivity level of the data. In some
of these embodiments, based on the sensitivity level of the
data, a minimum level of security is assigned. Then, any
level of security either at or above that minimum level can
be assigned to the data. For example, the minimum level for
data with sensitivity level **602** is set to security level **612**.
Therefore, security levels **611** and **612** can be assigned to the
data. Similarly, the minimum level for data with sensitivity
level **603** is set to security level **613**. Then security levels
611, **612** and **613** can be assigned to that data.

The above embodiments enable the creation of a secure,
private ecosystem where sensitive data is stored within
storage **212** of device interoperability system **200**, and only
devices which connect to device interoperability system **200**
and are booted by OS **214** can access this data. Furthermore,
the above details embodiments for a hierarchical or differ-
entiated system of secure storage.

The use of device interoperability system **200** also offers
advantages for IoT-enabled user devices. Similar to as with
cloud-based services, device interoperability system **200**
reduces the need to connect to the cloud to perform data
synchronization. Furthermore it reduces the difficulty of
having to maintain separate cloud credentials and device
settings for user devices.

18

The hierarchical or differentiated system of secure storage
mentioned above is of particular importance for IoT-enabled
devices, as many of these devices are publicly accessible and
may be difficult to monitor, thereby reducing the level of
security associated with these devices. By using a hierar-
chical or differentiated system of secure storage, such
devices can be used as part of a secure and private ecosystem
without jeopardizing the overall level of security and pri-
vacy of the ecosystem.

It is also possible to perform data restore in the event of
damage or loss of the device where device interoperability
system **200** is installed. As previously described, in some
embodiments OS **214** backs up data from storage **212** to a
portion of each local storage space corresponding to each of
the user devices connected to device interoperability system
200. Embodiments to perform caching were also previously
described above. Then, in some embodiments, OS **214** uses
the data stored in the one or more caches corresponding to
the user devices connected to device interoperability system
200, in conjunction with the data backed up on a portion of
the local storage space of the user devices connected to
device interoperability system **200**, to perform a data restore.

FIGS. 7A-7C illustrate an exemplary embodiment of a
data restore process performed by OS **214** which uses the
data stored in the one or more caches and the data backed up
on the user devices to perform a data restore. In step **701**, OS
214 checks to see if device interoperability system **200** is
connected to any of the user devices. If no, then in step **702**,
the user is prompted to connect device interoperability
system **200** to a user device. If device interoperability
system **200** is connected to a user device, or after connection
to a user device in step **702**, then in step **703** OS **214** checks
to see if data from a previous backup operation is available
on the user device. If yes, then in step **704**, OS **214** compares
data from the backup with data stored in storage **212**. If no,
then OS **214** progresses to step **708** which will be explained
further below.

Once step **704** is completed, in step **705** OS **214** deter-
mines if any data from the backup stored on the user device
is missing from storage **212**. If yes, then in step **706** OS **214**
determines the data which is missing from storage **212**. Once
step **706** is completed, then data is restored from the backup
on the user device to storage **212** in step **707**.

If in step **705** OS **214** determines that there is no data from
the backup on the user device missing from storage **212**,
then in step **715** of FIG. 7B OS **214** determines if the data
from the backup on the user device is different to the data
stored on storage **212**. If in step **715**, OS **214** determines that
there is no difference, then OS **214** progresses on to step **708**
of FIG. 7A. If OS **214** determines that there is a difference,
then in step **716** OS **214** determines whether the data in the
backup stored on the user device is more up to date than the
data stored in storage **212**. If the data in the backup stored
on the user device is less up to date, then OS **214** progresses
on to step **708** of FIG. 7A. If the OS **214** determines in step
716 that the data in the backup stored on the user device is
more up to date, then OS **214** restores the up to date data
from the backup to storage **212**. Once step **717** is completed,
OS **214** progresses to step **708** of FIG. 7A.

In step **708**, OS **214** determines if there is a cache
available on the user device storage. If there is no cache
available, then OS **214** progresses to step **713** which will be
explained further below. If there is a cache available, then in
step **709** OS **214** compares data from the cache with the data
stored in storage **212** to see if there is data present in the
cache which is missing from storage **212**. In one embodi-
ment, the cache service database which is stored on the user

device is used to determine if there is data present on the cache which is missing from storage 212 in step 709. If OS 214 determines in step 710 that there is data missing, then in step 711, OS 214 determines which portions of data are missing on storage 212. Once step 711 is completed, then in step 712 OS 214 restores the missing portions of data from the cache to storage 212. OS 214 then progresses to step 713.

If OS 214 determines in step 710 that there is no data missing, then in step 718 of FIG. 7C, OS 214 determines if the data stored in storage 212 is different from the data from the cache stored on the user device. In some embodiments, the cache service database which is stored on the user device is used to determine if the data present on the cache is different from the data stored on storage 212 in step 718. If there is no difference, then OS 214 progresses to step 713 of FIG. 7A. If there is a difference, then in step 719 OS 214 determines if the data stored in the cache is more up to date than the data stored in storage 212. If the data stored in the cache is less up to date, then OS 214 progresses to step 713. If it is more up to date, then in step 720 OS 214 restores the up to date data from the cache to storage 212. Once step 720 is completed, OS 214 progresses to step 713 of FIG. 7A.

In step 713 of FIG. 7A, OS 214 determines if there is another user device for device interoperability system 200 to connect to. If there is another user device available for connection, then OS 214 prompts the user to connect device interoperability system 200 to the other user device in step 721. After completing step 721, OS 214 returns to perform step 703. If there is no other user device available, then OS 214 stops the restore process in step 714.

Variations on the above are also possible. For example, in some embodiments, only data stored in the cache is used by OS 214 for data restore. An exemplary embodiment is illustrated with reference to FIGS. 8A and 8B. In step 801, similar to step 701, OS 214 checks to see if device interoperability system 200 is connected to any of the user devices. If no, then in step 802, similar to step 702, OS 214 prompts the user to connect device interoperability system 200 to a user device. If device interoperability system 200 is connected to a user device, or after connection to a user device in step 802, then in step 808 OS 214 determines if there is a cache available on the user device storage, similar to previously disclosed step 708,

If there is no cache available, then OS 214 progresses to step 813 which is similar to step 713. If there is a cache available, then in step 809 (similar to step 709) OS 214 compares data from the cache with the data stored in storage 212 to see if there is data present in the cache which is missing from storage 212. In one embodiment, the cache service database which is stored on the user device is used to determine if there is data present on the cache which is missing from storage 212 in step 809. If OS 214 determines in step 810 (similar to step 710) that there is data missing, then in step 811 (similar to step 711), OS 214 determines which portions of data are missing on storage 212. Once step 811 is completed, then in step 812 (similar to step 712) OS 214 restores the missing portions of data from the cache to storage 212. OS 214 then progresses to step 813.

If OS 214 determines in step 810 that there is no data missing, then in step 818 (similar to step 718 of FIG. 7C) of FIG. 8B, OS 214 determines if the data stored in storage 212 is different from the data from the cache stored on the user device. In some embodiments, the cache service database which is stored on the user device is used to determine if the data present on the cache is different from the data stored on storage 212 in step 818. If there is no difference, then OS 214 progresses to step 813 of FIG. 8A. If there is a difference,

then in step 819 (similar to step 719 of FIG. 7C) OS 214 determines if the data stored in the cache is more up to date than the data stored in storage 212. If the data stored in the cache is less up to date, then OS 214 progresses to step 813. If it is more up to date, then in step 820 (similar to step 720 of FIG. 7C) OS 214 restores the up to date data from the cache to storage 212. Once step 820 is completed, OS 214 progresses to step 813 of FIG. 8A.

In step 813 of FIG. 8A, OS 214 determines if there is another user device for device interoperability system 200 to connect to. If there is another user device available for connection, then OS 214 prompts the user to connect device interoperability system 200 to the other user device in step 821 (similar to step 721). After completing step 821, OS 214 returns to perform step 808. If there is no other user device available, then OS 214 stops the restore process in step 814, similar as in what would have happened in step 714.

As previously explained and as shown in step 4C-04 of FIG. 4C, OS 214 selectively prefetches one or more portions of data stored in storage 212 which are different from the data stored in the cache of a user device, and the selection and prioritization of data depends on several factors. In additional embodiments, these factors include the previously discussed backup status associated with each portion of data.

In one embodiment, when a portion of the data is about to be deleted from the cache, an additional check of its backup status is performed by OS 214. For example, if there are no more copies of particular portion of the data stored on other user devices or at other backup locations then this portion of data will not be deleted from the cache.

As explained above, the OS 214 supports migration of running applications between OS instances running on different user devices. In some embodiments, migration is performed using a “push”-based technique, that is, where migration is initiated at a source user device, and an application is then pushed from the source device to a destination user device. In further embodiments, a GUI is generated on a source user device to allow the user to select an application for migration, and the destination user device to which the application will be migrated to. An exemplary illustration is shown in FIG. 9A. In FIG. 9A, GUI 900 shows a list of running applications 901 on the source user device 101-2. List of running applications 901 has entries 902-1 to 902-3, each corresponding to a running application. When any of these entries are selected, an option is presented to the user to enable the user to decide which destination device the application is to be migrated to. As shown in FIG. 9A, when an entry such as entry 902-1 is selected, option 903 with the prompt “MOVE THIS APP TO” is presented to the user, along with a list of connected user devices 905. List 905 comprises, for example, items 907-1 to 907-3, wherein each item corresponds to one of other user devices 101-3, 101-4 and 101-5 currently connected to the device interoperability system 200. In some embodiments, each item consists of an icon representing the type of the user device and the device name. For example, item 907-1 corresponds to user device 101-3 which is a laptop. An exemplary illustration of item 907-1 is shown in FIG. 9B. In FIG. 9B item 907-1 comprises icon 908-1 to represent a laptop, and name label 908-2 comprising, for example, “My Laptop”.

In some embodiments, migration is performed using a “pull”-based technique, that is, where migration is initiated at the destination user device, and an application is then pulled from a source user device for migration to the destination user device. In further embodiments, a GUI is generated on a destination user device to allow the user to select a source user device where an application will be

21

migrated from, and an application for migration. An exemplary illustration is shown in FIG. 10A. In FIG. 10A, GUI 1000 presents an option 1004 with the prompt “CHOOSE A DEVICE”, along with a list of source devices 1001. List of source user devices 1001 has entries 1002-1 to 1002-3, corresponding to source user devices 101-2, 101-4 and 101-5 connected to device interoperability system 200. In some embodiments, each entry comprises an icon representing the type of the user device and the device name. For example, entry 1002-1 corresponds to user device 101-2 which is a smartphone. An exemplary illustration of entry 1002-1 is shown in FIG. 10B. In FIG. 10B entry 1002-1 comprises icon 1008-1 to represent a phone, and name label 1008-2 comprising, for example, “My Phone”. When any of these entries are selected, an option is presented to the user to enable the user to decide which running application should be migrated from the selected source user device. As shown in FIG. 10A, when an entry such as entry 1002-1 is selected, option 1003 with the prompt “MIGRATE APP FROM OTHER DEVICE” is presented to the user, along with a list of applications 1005 running on user device 101-2. List 1005 comprises, for example, items 1007-1 to 1007-3, wherein each item corresponds to one of the applications which are running on source user device 101-2.

Although the algorithms described above including those with reference to the foregoing flow charts have been described separately, it should be understood that any two or more of the algorithms disclosed herein can be combined in any combination. Any of the methods, algorithms, implementations, or procedures described herein can include machine-readable instructions for execution by: (a) a processor, (b) a controller, and/or (c) any other suitable processing device. Any algorithm, software, or method disclosed herein can be embodied in software stored on a non-transitory tangible medium such as, for example, a flash memory, a CD-ROM, a floppy disk, a hard drive, a digital versatile disk (DVD), or other memory devices, but persons of ordinary skill in the art will readily appreciate that the entire algorithm and/or parts thereof could alternatively be executed by a device other than a controller and/or embodied in firmware or dedicated hardware in a well known manner (e.g., it may be implemented by an application specific integrated circuit (ASIC), a programmable logic device (PLD), a field programmable logic device (FPLD), discrete logic, etc.). Also, some or all of the machine-readable instructions represented in any flowchart depicted herein can be implemented manually as opposed to automatically by a controller, processor, or similar computing device or machine. Further, although specific algorithms are described with reference to flowcharts depicted herein, persons of ordinary skill in the art will readily appreciate that many other methods of implementing the example machine readable instructions may alternatively be used. For example, the order of execution of the blocks may be changed, and/or some of the blocks described may be changed, eliminated, or combined.

It should be noted that the algorithms illustrated and discussed herein as having various modules which perform particular functions and interact with one another. It should be understood that these modules are merely segregated based on their function for the sake of description and represent computer hardware and/or executable software code which is stored on a computer-readable medium for execution on appropriate computing hardware. The various functions of the different modules and units can be combined or segregated as hardware and/or software stored on a

22

non-transitory computer-readable medium as above as modules in any manner, and can be used separately or in combination.

While particular implementations and applications of the present disclosure have been illustrated and described, it is to be understood that the present disclosure is not limited to the precise construction and compositions disclosed herein and that various modifications, changes, and variations can be apparent from the foregoing descriptions without departing from the spirit and scope of an invention as defined in the appended claims.

What is claimed is:

1. A system to enhance usability of one or more user devices associated with a user, wherein:

the one or more user devices comprise a first user device and a second user device, and the device interoperability system is installed on the second user device;

the device interoperability system comprising:

a communications module, wherein

a first connection is established between the first user device and the communications module, further wherein

the first connection is either wired or wireless, storage communicatively coupled to the communications module, wherein the storage stores

an operating system,

one or more programs,

data associated with the user, further wherein

the operating system is booted by the first user device via the first connection,

the operating system runs on the first user device, and

the operating system uses one or more processing capabilities of the first user device to operate, and

one or more processors to perform one or more functions of supporting the device interoperability system.

2. The system of claim 1, wherein the first user device is either an industrial IoT device or a consumer IoT device.

3. The system of claim 1, wherein the second user device is a laptop.

4. The system of claim 1, wherein the first connection is a direct wired connection.

5. The system of claim 1, wherein the second user device is associated with a network of industrial devices.

6. The system of claim 1, wherein

one or more UEFI settings are changed on the first user device; and

based on the change of the one or more UEFI settings, the operating system is booted by the first user device.

7. The system of claim 1, wherein:

the first user device has a first user device storage; and the device interoperability system uses the first user device storage to perform at least one of:

caching,

swapping,

expanding storage, and

backups.

8. The system of claim 1, wherein:

the first user device has processing power and memory;

the one or more programs comprise a first program; and

the first program runs on the first user device using the first user device processing power and memory.

23

9. The system of claim 1, wherein the operating system: identifies the first user device, and determines whether the operating system has stored a configuration set corresponding to the first user device.
10. The system of claim 9, wherein
 when the operating system determines that the operating system has stored the configuration set corresponding to the first user device, the operating system uses the configuration set; and
 when the operating system determines that the operating system has not stored the configuration set corresponding to the first user device, the operating system installs one or more drivers automatically.
11. A method to enhance usability of one or more user devices associated with a user, the one or more user devices comprising a first user device; the method comprising
 providing a device interoperability system comprising a communications module, storage communicatively coupled to the communications module, further wherein
 the one or more user devices comprise a second user device, and
 the device interoperability system is installed on the second user device;
 enabling establishment of a first connection between the first user device and the communications module;
 enabling the storage to store
 an operating system,
 one or more programs, and
 data associated with the user;
 enabling booting of the operating system by the first user device via the first connection; and
 enabling the operating system to:
 run on the first user device, and
 use one or more processing capabilities of the first user device to operate.
12. The method of claim 11, wherein the first user device is either an industrial IoT device or a consumer IoT device.
13. The method of claim 11, wherein
 the first user device has a display; and
 the operating system uses the first user device display.

24

14. The method of claim 11, wherein the second user device is associated with a network of industrial devices.
15. The method of claim 11, wherein the method further comprises
 the first user device switching between operating in a stand-alone mode and in an interoperability mode.
16. The method of claim 15, wherein the method comprises:
 presenting an option to set up for interoperability mode; and
 enabling the user to perform at least one of:
 setting up authentication parameters,
 setting up encryption parameters,
 configuring a storage of the first user device for at least one of:
 swapping,
 caching,
 backups, and
 providing additional storage, and
 saving a configuration set.
17. The method of claim 11, wherein:
 the second user device comprises at least one of:
 a second user device storage,
 a second user device communications module, and
 one or more second user device processors; and
 the device interoperability system uses at least one of:
 the second user device storage,
 the second user device communications module, and
 the one or more second user device processors for its operation.
18. The method of claim 11, wherein a graphical user interface (GUI) is generated on the first user device to enable the user to interface with the operating system.
19. The method of claim 11, wherein the operating system is used to boot up a third user device after being shut down on the first user device.
20. The system of claim 1, wherein one or more hardware components of the second user device are used by the operating system as external devices.

* * * * *